

ABB BALDOR RELIANCE III

Customer information packet

AEM3783-4

3HP, 1760RPM, 3PH, 60HZ, 213, 0728M, TEFC, F1, N

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	213
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	65 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.900 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	3.9 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	K

Part Detail

Revision	B
Type	AC
Mech. spec.	07G087
Base	
Status	PRD/A
Elec. spec.	07WGR447
Layout	07LYG087
Eff. date	04-21-2021
CD Diagram	CD0006
Poles	04
Leads	3#14
Proprietary	False
Created date	11-19-2020

Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0728M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	18.07 IN
Power Factor	81
Product Family	Automotive (Not For DC)
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1404									
CAT.NO.	AEM3783-4								
SPEC.	07G087R447G1								
VOLTS	460								
AMP	3.9								
RPM	1760		HP	3					
FRAME	213		HZ	60		PH	3		
SER.F.	1.00	CODE	K	DES	B	CL	F		
NEMA-NOM-EFF	89.5	PF	81						
G.MIN.EFF	87.5	CC	010A						
RATING	65C AMB-CONT								
LUBRICATION	POLYREX EM								
DE	6307	ODE	6206						
ENCL	TEFC	SER. #							


ABB Motors and Mechanical Inc.

WINDING # 07WGR447


Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 1760 RPM 460 V 0728M

TORQUES (LB-FT): PO=31.5 PU=16.4 LR=20.7 LRA=32.6

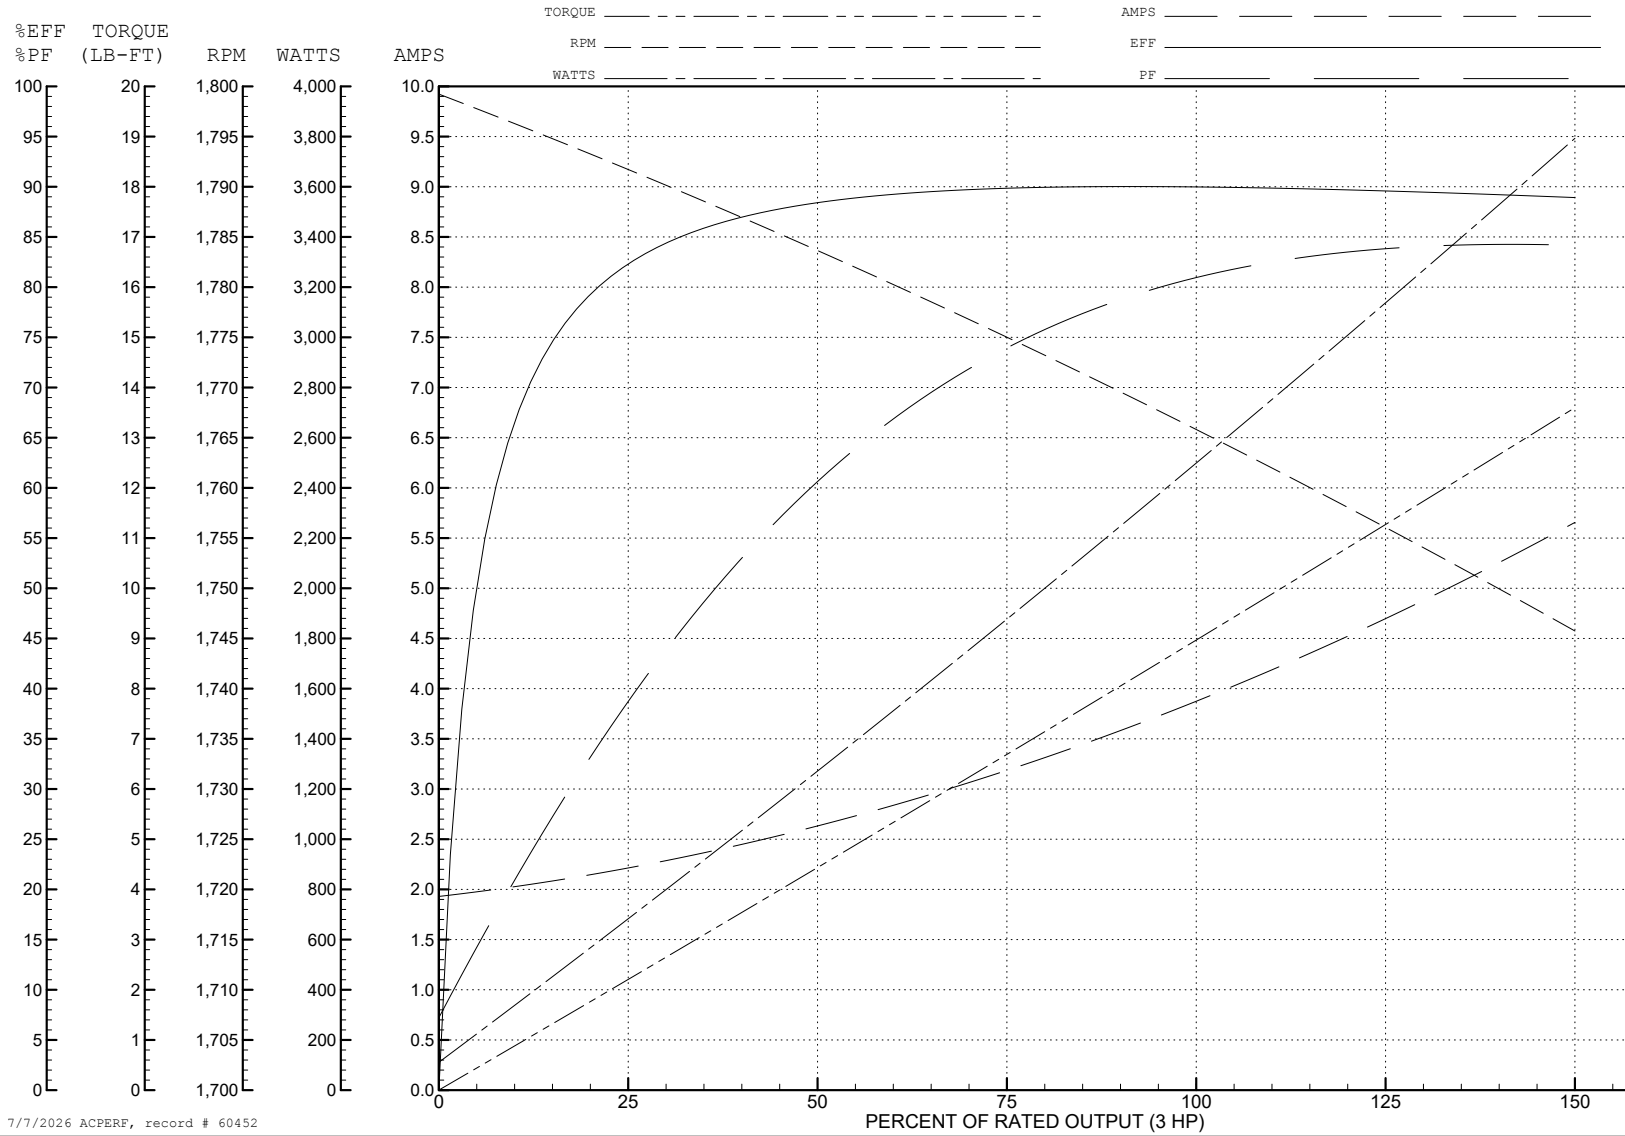

7/7/2026 ACPERF, record # 60452

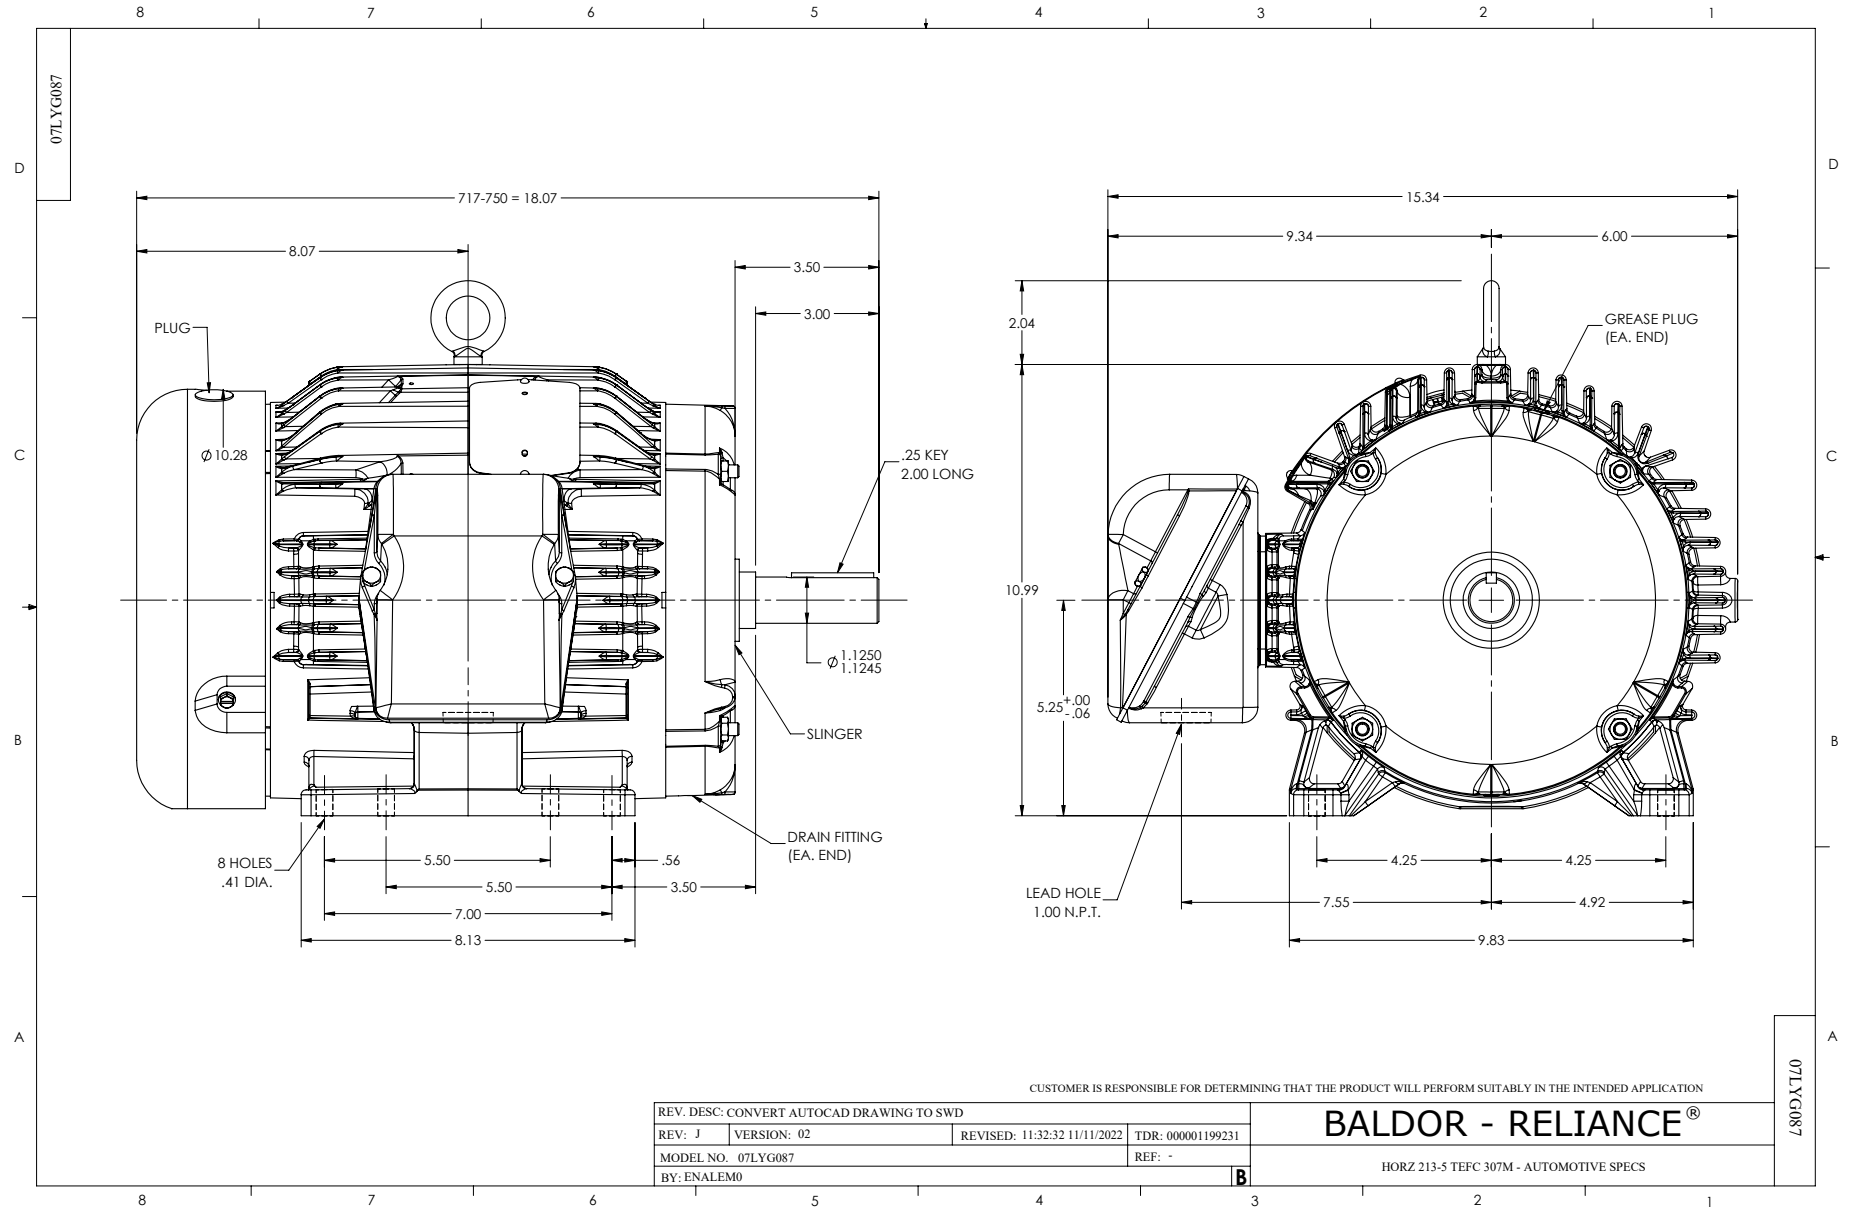

CD0006



NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIRO
MTL: -		© □

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1