Customer information packet

EMVM13754C-S-AP

M3AA 132MC 4P B14 7.5KW

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/16/2026 6:34:50 PM

ABB MOTORS AND GENERATORS

Motor data sheet

M3AA 132MC 4

Definition	Data	Unit	Remarks
Product code	3GAA132330-**K		CA501 Catalog number EMVM13754C-S-AP
Voltage code	S		Can be used at 230VD/60Hz
Type/Frame	M3AA 132MC 4		
Design	CENELEC		
Efficiency class	IE3		
Rated output P_N	7.5	kW	
Rated voltage U_N	460	V	± 5 % (IEC 60034-1)
Rated frequency f_N	60	Hz	± 2 % (IEC 60034-1)
Rated speed n_N	1766	r/min	
Rated current I_N	13	A	
Starting current I_S/I_N	8.7		
Nominal torque T_N	40.5	Nm	
Locked rotor torque T_l/T_N	2.6		
Maximum torque T_b/T_N	3.9		
Efficiency - full load 100%	91.7	%	Acc. to IEC 60034-2-1
Efficiency - 75%	91.6	%	
Efficiency - 50%	90.8	%	
Power factor - full load 100%	0.79		
Bearing DE/NDE	6208-2Z/C3 6206-2Z/C3		
Sound pressure level L_{PA} dB	69	dB(A)	+3dB(A)
Moment of inertia J = ¼ GD^2 kgm^2	0.04	kg-m²	
Weight	68	kg	

All data subject to tolerances in accordance with IEC. Data subject to changes.

ABB MOTORS AND GENERATORS


Motor data sheet

M3AA 132MC 4


Definition	Data	Unit	Remarks
Product code	3GAA132330-**K		CA501 Catalog number EMVM13754C-S-AP
Voltage code	S		
Type/Frame	M3AA 132MC 4		
Design	CENELEC		
Efficiency class	IE3		
Rated output P_N	7.5	kW	
Rated voltage U_N	400	V	± 5 % (IEC 60034-1)
Rated frequency f_N	50	Hz	± 2 % (IEC 60034-1)
Rated speed n_N	1464	r/min	
Rated current I_N	14.7	A	
Starting current I_S/I_N	7.7		
Nominal torque T_N	48.9	Nm	
Locked rotor torque T_l/T_N	2.5		
Maximum torque T_b/T_N	3.6		
Efficiency - full load 100%	90.6	%	Acc. to IEC 60034-2-1
Efficiency - 75%	91	%	
Efficiency - 50%	90.9	%	
Power factor - full load 100%	0.81		
Bearing DE/NDE	6208-2Z/C3 6206-2Z/C3		
Sound pressure level L_{PA} dB	64	dB(A)	+3dB(A)
Moment of inertia J = ¼ GD^2 kgm^2	0.04	kg-m²	
Weight	68	kg	

All data subject to tolerances in accordance with IEC. Data subject to changes.


Diagram of connection
Anschluss-Schema
Schema de branchement




Connection of terminals
Anschluss des Motors
Branchement des bornes




Y-connection
Y-Schaltung
Connection etoile





D-connection
D-Schaltung
Connection triangle





Direction of rotation with phase sequence shown in picture
Drehrichtung nach Schaltbild
Direction de rotation avec branchement ci-dessus



Direction of rotation with reversed phase sequence
Drehrichtung mit umgekehrter Phasenfolge
Direction de rotation avec sequence de phase reversée

Motor No Maschine Nr No du moteur	
ABB Oy, Motors	3GZF321100-1 E


Connection Diagram

Document No: 3GZF321100-1 E

Description: 3-PHASE SQUIRREL-CAGE MOTOR

Unit:	Motors	Issued by:	M Prusi	Replaces:	
Date:	21.09.2005	Approved by:	Jari Raittila	Replaced by:	

ABB Oy | Customer Reference:

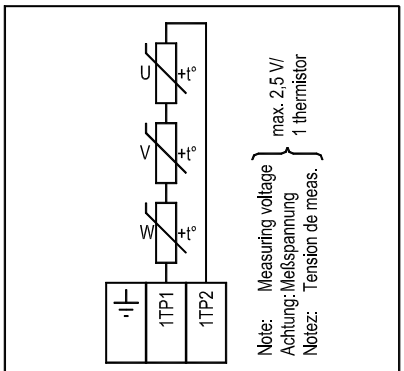

PTC-THERMISTORS
PTC-TEMPERATURFÜHLER
SONDES THERMIQUE PTC

Motor No
Maschine Nr
Moteur No

ABB Oy, Motors	3GZF321200-1 D


Accessory Connection Diagram

Document No: 3GZF321200-1 D

Description: PTC-THERMISTORS

Unit:	Motors	Issued by:	K.Högkvist	Replaces:
Date:	30.11.2005	Approved by:	M.Prusi	Replaced by:

ABB Oy Customer Reference:

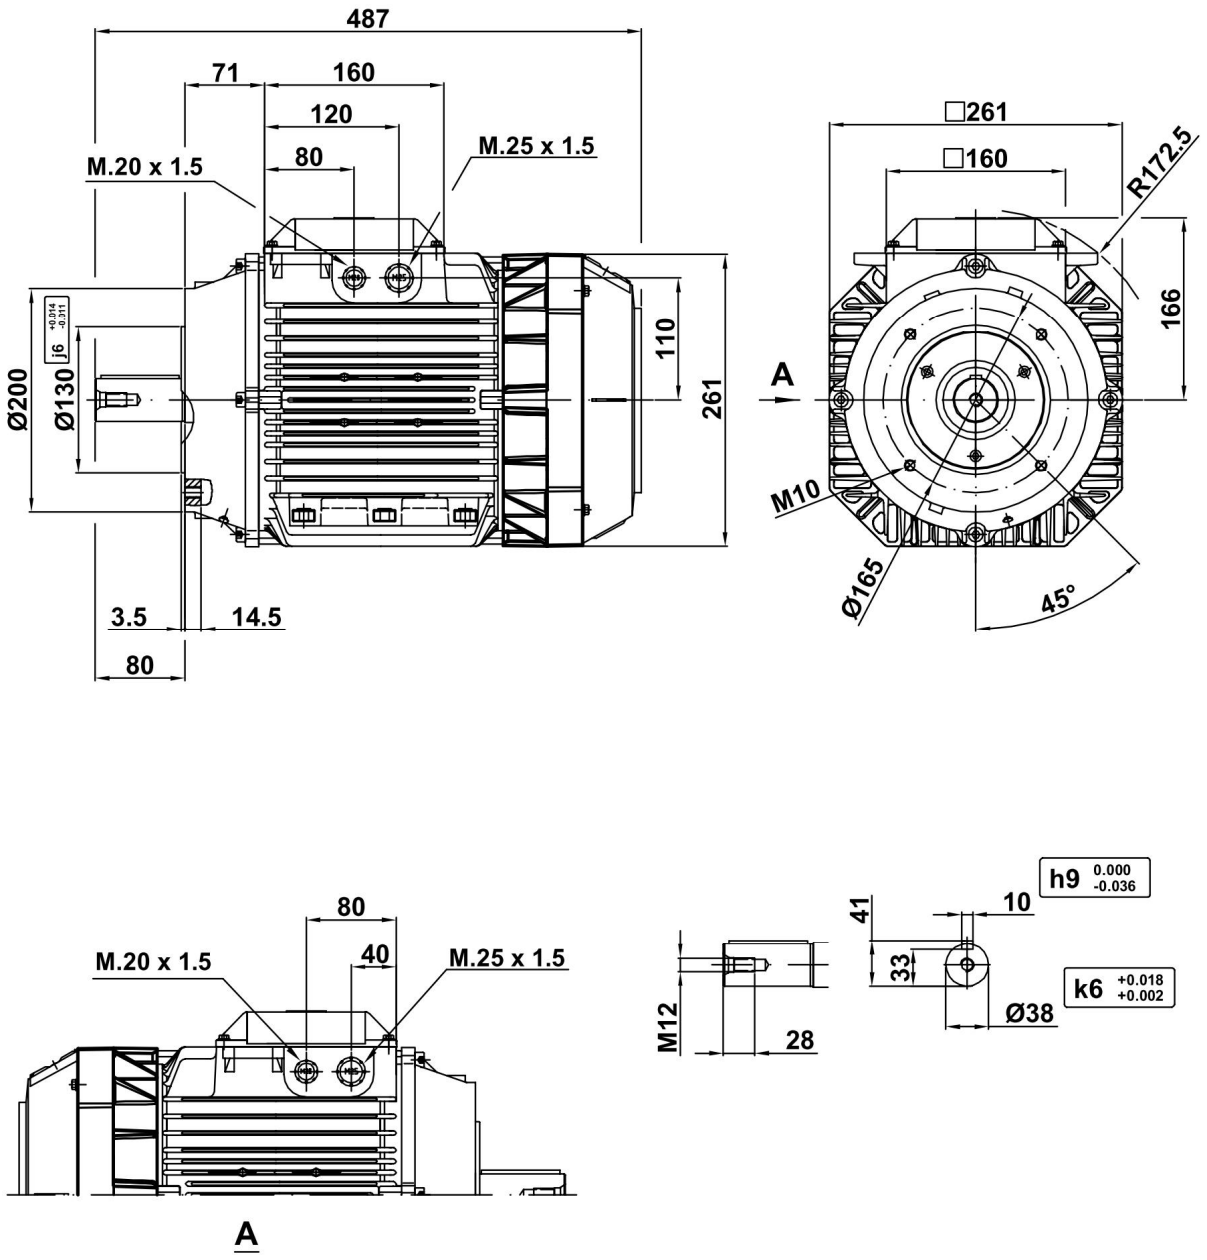

Additional information:

Dimension Print	Motor Type: M3AA (K) 132 B14, V18, V19	Document No: 3GZW500613-38 A 13 AA 132 A
Description: SQUIRREL CAGE MOTOR		
Unit: Motors and Generators Date: 05.01.2017	Issued by: G.Borg Approved by: G.Borg	Replaces: Replaced by:
ABB AB	Customer Reference:	