

ABB BALDOR RELIANCE III

Customer information packet

M3543-5

.75HP, 1140RPM, 3PH, 60HZ, 56H, 3428M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56H
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.200 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	77.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.2 a
Insulation Class	B
Inverter Code	Not Inverter
IP Rating	NONE

Part Detail

Revision	J
Type	AC
Mech. spec.	34J153
Base	
Status	PRD/A
Elec. spec.	34WGW415
Layout	34LYJ153
Eff. date	10-25-2024
CD Diagram	CD00006
Poles	06
Leads	3#18
Proprietary	False
Created date	02-16-2007

KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3428M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	12.84 IN
Power Factor	59
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1140 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M3543-5								
SPEC.	34J153W415								
HP	.75								
VOLTS	575								
AMP	1.2								
RPM	1140								
FRAME	56H		HZ	60			PH	3	
SER.F.	1.15	CODE	K	DES	B	CLASS		B	
NEMA-NOM-EFF	77	PF	59						
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	TEFC	SN							
	SFA 1.3								

AC Induction Motor Performance Data

Record # 6974

Typical performance - not guaranteed values

Winding: 34WGW415-R001			Type: 3428M		Enclosure: TEFC	
Nameplate Data				575 V, 60 Hz: Single Voltage Motor		
Rated Output (HP)		.75		Full Load Torque		3.4 LB-FT
Volts		575		Start Configuration		direct on line
Full Load Amps		1.2		Breakdown Torque		11.8 LB-FT
R.P.M.		1140		Pull-up Torque		9.3 LB-FT
Hz	60	Phase	3	Locked-rotor Torque		9.7 LB-FT
NEMA Design Code		B		KVA Code	K	
Service Factor (S.F.)		1.15		Starting Current		5.9 A
NEMA Nom. Eff.		77		Power Factor	59	
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load
S.F. Amps		1.3		Temp. Rise @ S.F. Load		61°C

Load Characteristics 575 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	26	40	51	59	65	68	63
Efficiency	60	72	76	77	75	73	76
Speed	1185	1170	1155	1135	1115	1095	1125
Line amperes	0.88	0.96	1.12	1.2	1.36	1.6	1.3


ABB Motors and Mechanical Inc.


WINDING # 34WG415

Typical performance - not guaranteed values.

0.75 HP 3 PH 60 HZ 1140 RPM 575 V 3428M

TORQUES (LB-FT): PO=11.8 PU=9.3 LR=9.7 LRA=5.9

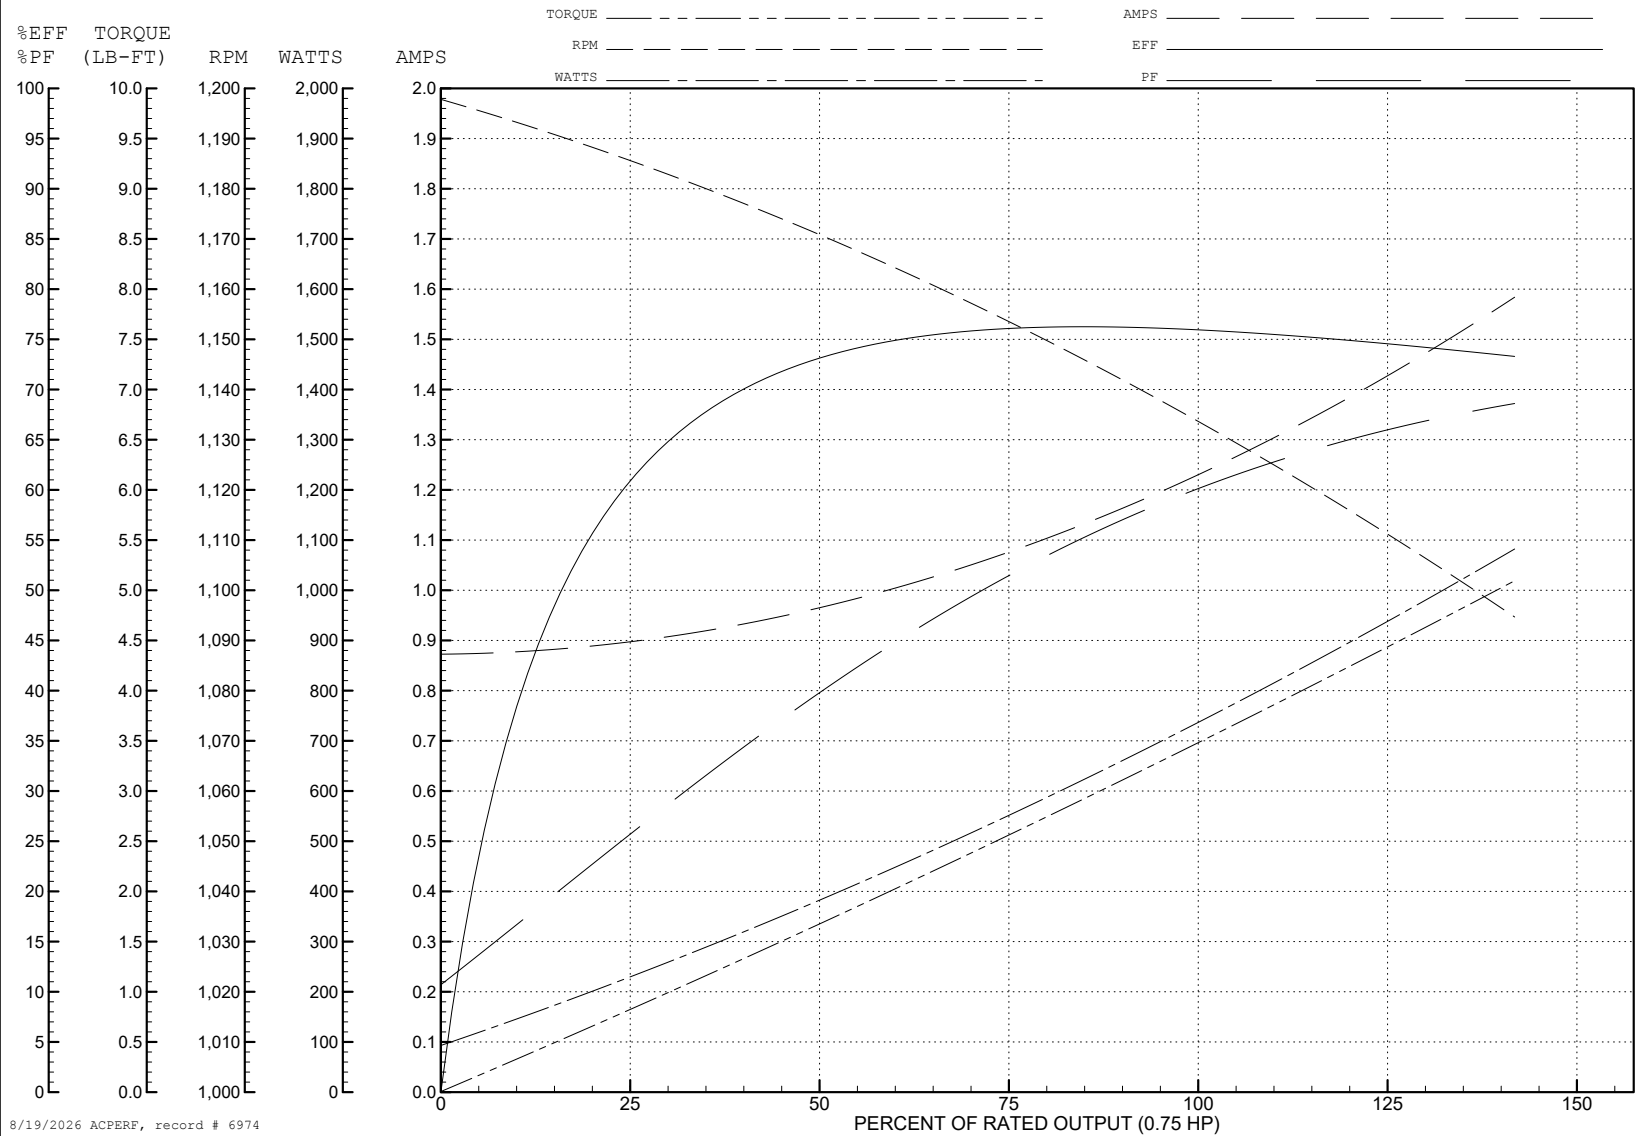

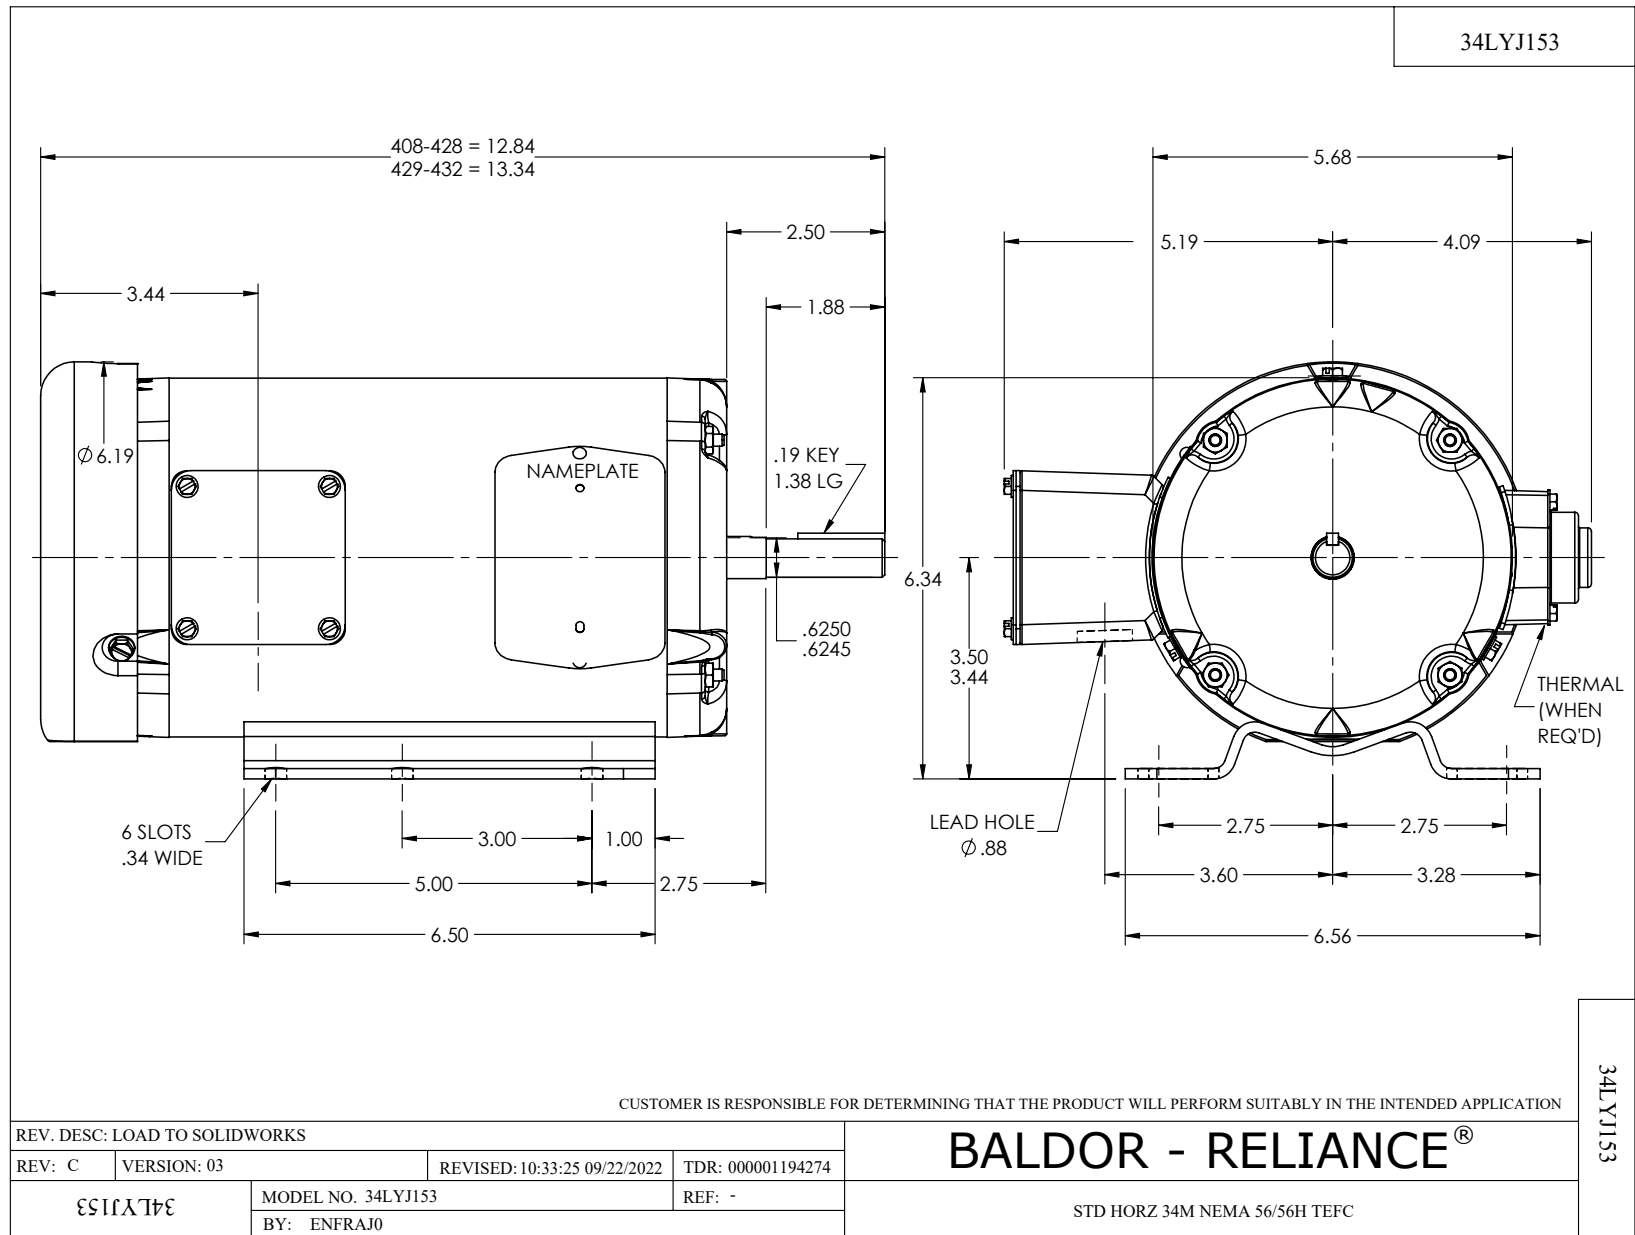

CD0006


NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: -


BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1