Customer information packet

MM07254-S-AP

M3AA 71 A 4P B3 .25KW

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/16/2026 1:28:22 AM

ABB MOTORS AND GENERATORS

Motor data sheet

M2AA 71B 4

Definition	Data	Unit	Remarks
Product code	3GAA072002-**E		
Voltage code	S		
Type/Frame	M2AA 71B 4		
Design	CENELEC		
Efficiency class	IE2		
Rated output P_N	0.37	kW	
Rated voltage U_N	460	V	± 5 % (IEC 60034-1)
Rated frequency f_N	60	Hz	± 2 % (IEC 60034-1)
Rated speed n_N	1695	r/min	
Rated current I_N	0.86	A	
Starting current I_S/I_N	5.3		
Nominal torque T_N	2	Nm	
Locked rotor torque T_l/T_N	2.2		
Maximum torque T_b/T_N	2.6		
Efficiency - full load 100%	74.4	%	Acc. to IEC 60034-2-1
Efficiency - 75%	74.9	%	
Efficiency - 50%	71.9	%	
Power factor - full load 100%	0.72		
Bearing DE/NDE	6203-2Z/C3 6202-2Z/C3		
Sound pressure level L_{PA} dB	48	dB(A)	+3dB(A)
Moment of inertia J = ¼ GD^2 kgm^2	0	kg-m²	
Weight	5.9	kg	

All data subject to tolerances in accordance with IEC. Data subject to changes.


ABB MOTORS AND GENERATORS


Motor data sheet

M2AA 71B 4

Definition	Data	Unit	Remarks
Product code	3GAA072002-**E		
Voltage code	S		
Type/Frame	M2AA 71B 4		
Design	CENELEC		
Efficiency class	IE1		
Rated output P_N	0.37	kW	
Rated voltage U_N	400	V	± 5 % (IEC 60034-1)
Rated frequency f_N	50	Hz	± 2 % (IEC 60034-1)
Rated speed n_N	1375	r/min	
Rated current I_N	0.96	A	
Starting current I_S/I_N	3.8		
Nominal torque T_N	2.5	Nm	
Locked rotor torque T_l/T_N	2		
Maximum torque T_b/T_N	2.2		
Efficiency - full load 100%	69.7	%	Acc. to IEC 60034-2-1
Efficiency - 75%	71.9	%	
Efficiency - 50%	71.1	%	
Power factor - full load 100%	0.79		
Bearing DE/NDE	6203-2Z/C3 6202-2Z/C3		
Sound pressure level L_{PA} dB	45	dB(A)	+3dB(A)
Moment of inertia J = ¼ GD^2 kgm^2	0	kg-m²	
Weight	5.9	kg	

All data subject to tolerances in accordance with IEC. Data subject to changes.

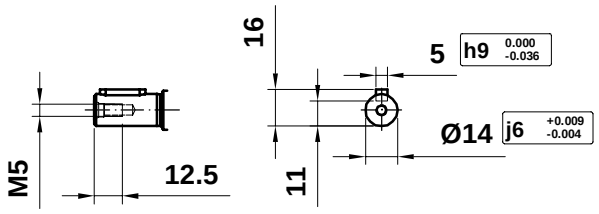


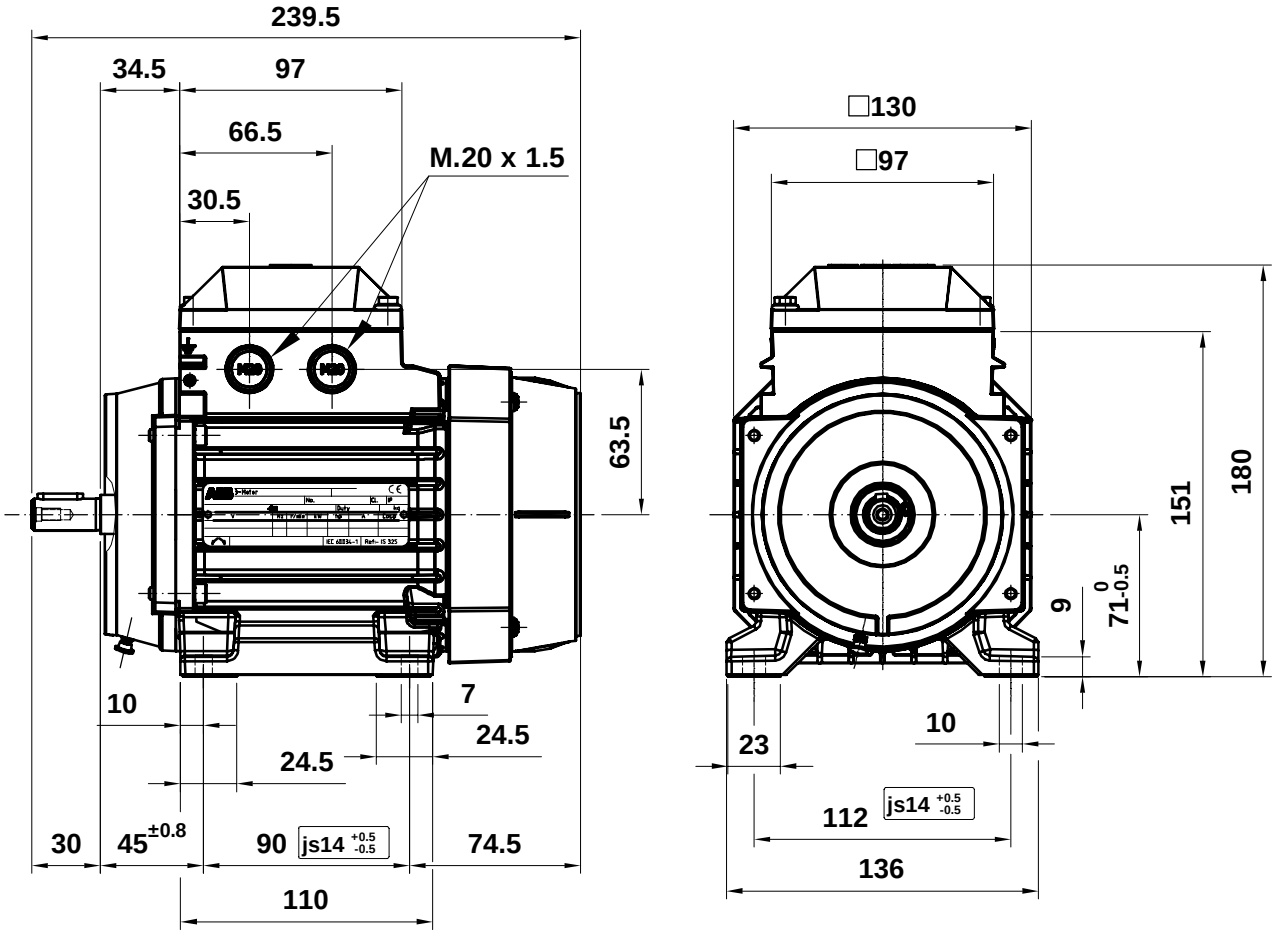


M2AA 071

Motor Dimension Print	Motor Type : M2AA 071	Document Nº : A1.5400 / 3D A2.5010
Description : Motor foot mounted IM1001 / Motor con patas IM1001		
Unit : Discrete Automation and Motion - Fáb. Motores Date : 2012-02-08	Issued by : ERM / L. Moreno Approved by : ERM / G.Blanes	Replaces : Replaced by :
Asea Brown Boveri, S.A.	Customer Reference :	


Diagram of connection
Anschluss-Schema
Schema de branchement




Connection of terminals
Anschluss des Motors
Branchement des bornes




Y-connection
Y-Schaltung
Connection etoile





D-connection
D-Schaltung
Connection triangle





Direction of rotation with phase sequence shown in picture
Drehrichtung nach Schaltbild
Direction de rotation avec branchement ci-dessus




Direction of rotation with reversed phase sequence
Drehrichtung mit umgekehrter Phasenfolge
Direction de rotation avec sequence de phase reversée

Motor No Maschine Nr No du moteur	
ABB Oy, Motors	3GZF321100-1 E

Connection Diagram	Document No: 3GZF321100-1 E
Description: 3-PHASE SQUIRREL-CAGE MOTOR	

Unit:	Motors	Issued by:	M Prusi	Replaces:
Date:	21.09.2005	Approved by:	Jari Raittila	Replaced by:

ABB Oy	Customer Reference:	

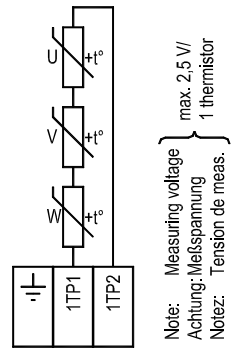

PTC-THERMISTORS
PTC-TEMPERATURFÜHLER
SONDES THERMIQUE PTC

Motor No
Maschine Nr
Moteur No

ABB Oy, Motors | 3GZF321200-1 D

Accessory Connection Diagram

Document No: 3GZF321200-1 D

Description: PTC-THERMISTORS

Unit:	Motors	Issued by:	K.Högkvist	Replaces:
Date:	30.11.2005	Approved by:	M.Prusi	Replaced by:

ABB Oy | Customer Reference: