

**BALDOR • RELIANCE**

---

# Customer information packet

## MVM3458C

.25KW, 1725RPM, 3PH, 60HZ, D71C, 3320M, TEFC

## Specifications

Enclosure	TEFC
Frame	D71C
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	.330 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.700 A @ 460.0 V 1.400 A @ 230.0 V 1.700 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	74.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Feedback Signal	NONE
Frame Prefix	D
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

## Part detail

Revision	AS
Type	AC
Mech. spec.	33-1922
Base	
Status	PRD/A
Elec. spec.	33WG0675
Layout	33LY1922
Eff. date	06-28-2024
CD Diagram	CD0005A05
Poles	04
Leads	9#18
Proprietary	False
Created date	06-25-2007

High Voltage Full Load Amps	0.7 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	-
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	IEC
Motor Type	3320M
Mounting Arrangement	F2
Number of Poles	4
Overall Length	10.74 IN
Power Factor	58
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.552 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

**Winding Thermal 2**

**None**

---

**Nameplate**

<b>NP1379L</b>					
<b>CAT.NO.</b>	MVM3458C				
<b>SPEC.</b>	33-1922-675				
<b>IEC FRAME</b>	D71C	<b>K.W.</b>	.25 TE		
<b>VOLTS</b>	230/460 ENCL TEFC				
<b>AMP</b>	1.4/.7				
<b>RPM</b>	1725	<b>I.P.</b>	54		
<b>HZ</b>	60	<b>PH</b>	3	<b>CL</b>	B
<b>SER.F.</b>	1.35	<b>DES</b>	B	<b>CODE</b>	-
<b>NEMA-NOM-EFF</b>	74	<b>PF</b>	58		
<b>RATING</b>	40C AMB-CONT				
<b>CC</b>					
<b>DE</b>	6203	<b>ODE</b>	6203		
<b>SER. #</b>					
	SFA 1.6/.8				

**AC Induction Motor Performance Data**

Record # 16144

Typical performance - not guaranteed values

<b>Winding: 33WG0675-R001</b>		<b>Type: 3320M</b>		<b>Enclosure: TEFC</b>	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	0.33	<b>Full Load Torque</b>	1 LB-FT		
<b>Volts</b>	230/460	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	1.4/0.7	<b>Breakdown Torque</b>	4.2 LB-FT		
<b>R.P.M.</b>	1725	<b>Pull-up Torque</b>	3.9 LB-FT		
<b>Hz</b>	60 <b>Phase</b>	3	<b>Locked-rotor Torque</b>	4.4 LB-FT	
<b>NEMA Design Code</b>	<b>B KVA Code</b>	-	<b>Starting Current</b>	4 A	
<b>Service Factor (S.F.)</b>		1.35	<b>No-load Current</b>	0.53 A	
<b>NEMA Nom. Eff.</b>	<b>74 Power Factor</b>	58	<b>Line-line Res. @ 25°C</b>	47.3 Ω	
<b>Rating - Duty</b>		40C AMB-CONT	<b>Temp. Rise @ Rated Load</b>	56°C	
<b>S.F. Amps</b>		1.6/0.8	<b>Temp. Rise @ S.F. Load</b>	71°C	

**Load Characteristics 460 V, 60 Hz, 0.33 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	29	42	53	62	69	75	72
<b>Efficiency</b>	49	64	71	74	75	75	75.4
<b>Speed</b>	1776	1758	1738	1717	1695	1670	1686
<b>Line amperes</b>	0.54	0.57	0.61	0.67	0.74	0.82	0.77


ABB Motors and Mechanical Inc.

WINDING # 33WG0675


0.33 HP 3 PH 60 HZ 1725 RPM 460 V 3320M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=4.2 PU=3.9 LR=4.4 LRA=4



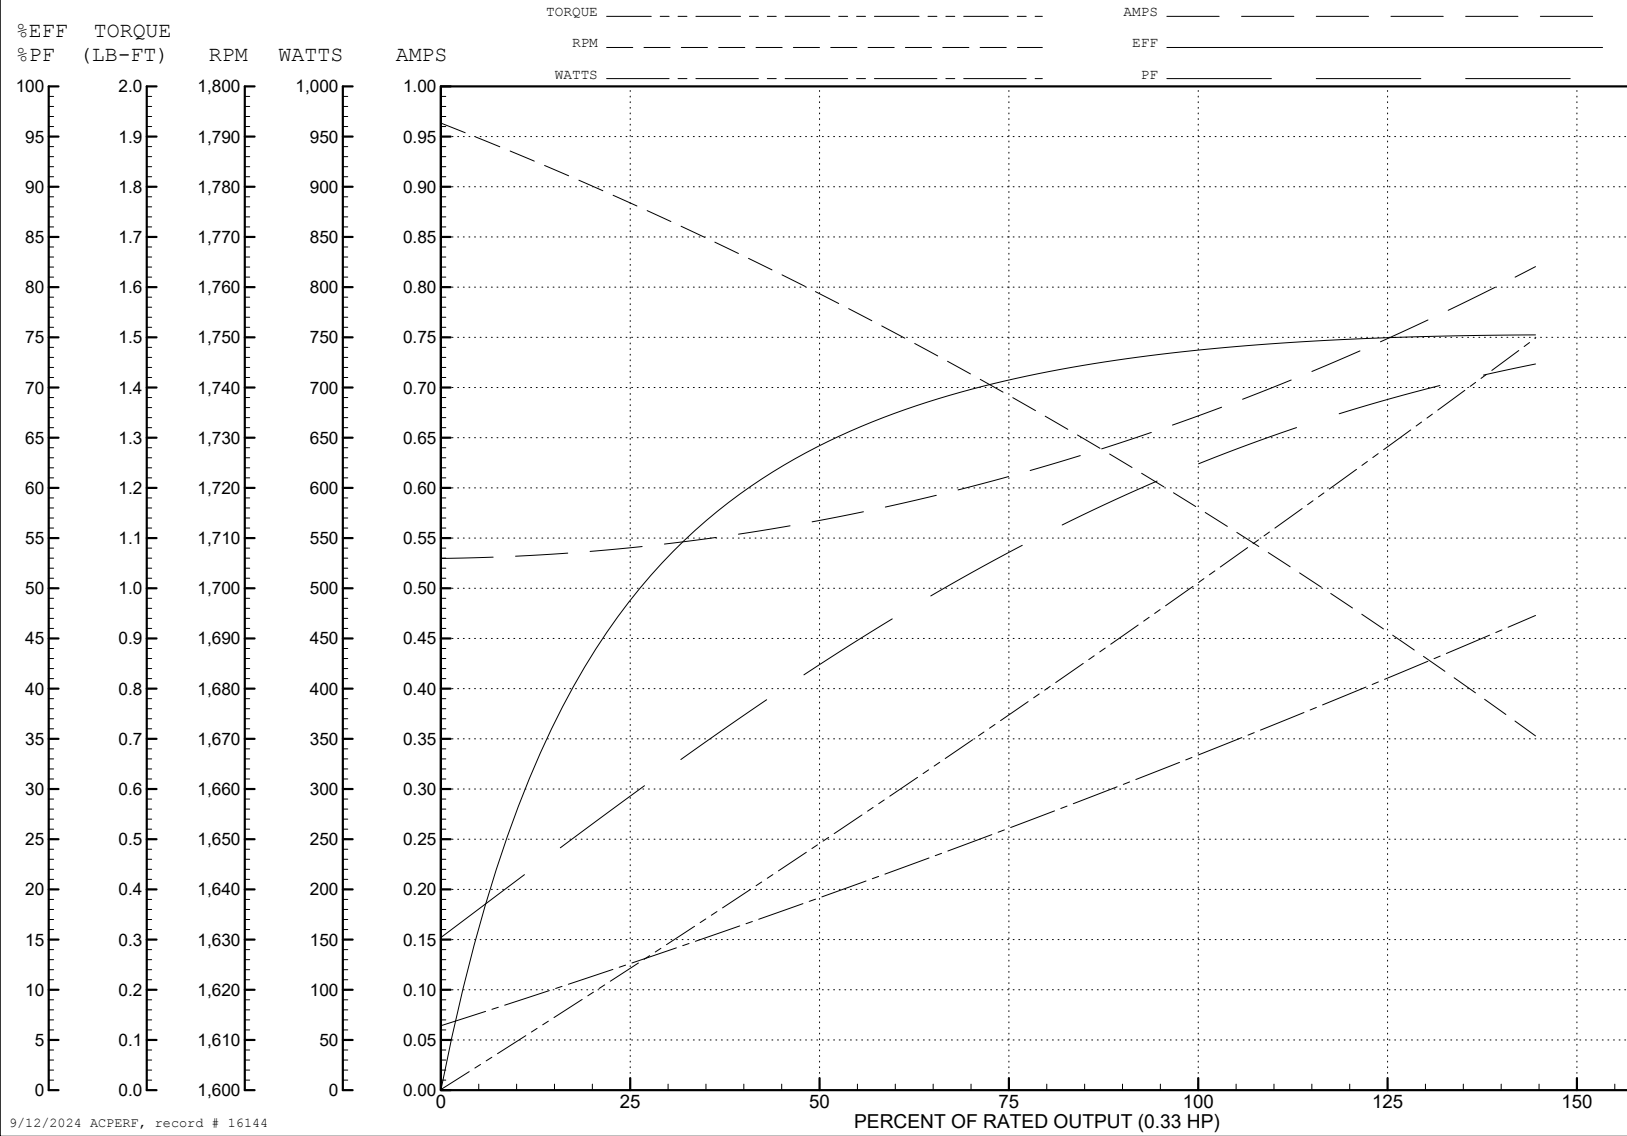


9/12/2024 ACPERF, record # 16144

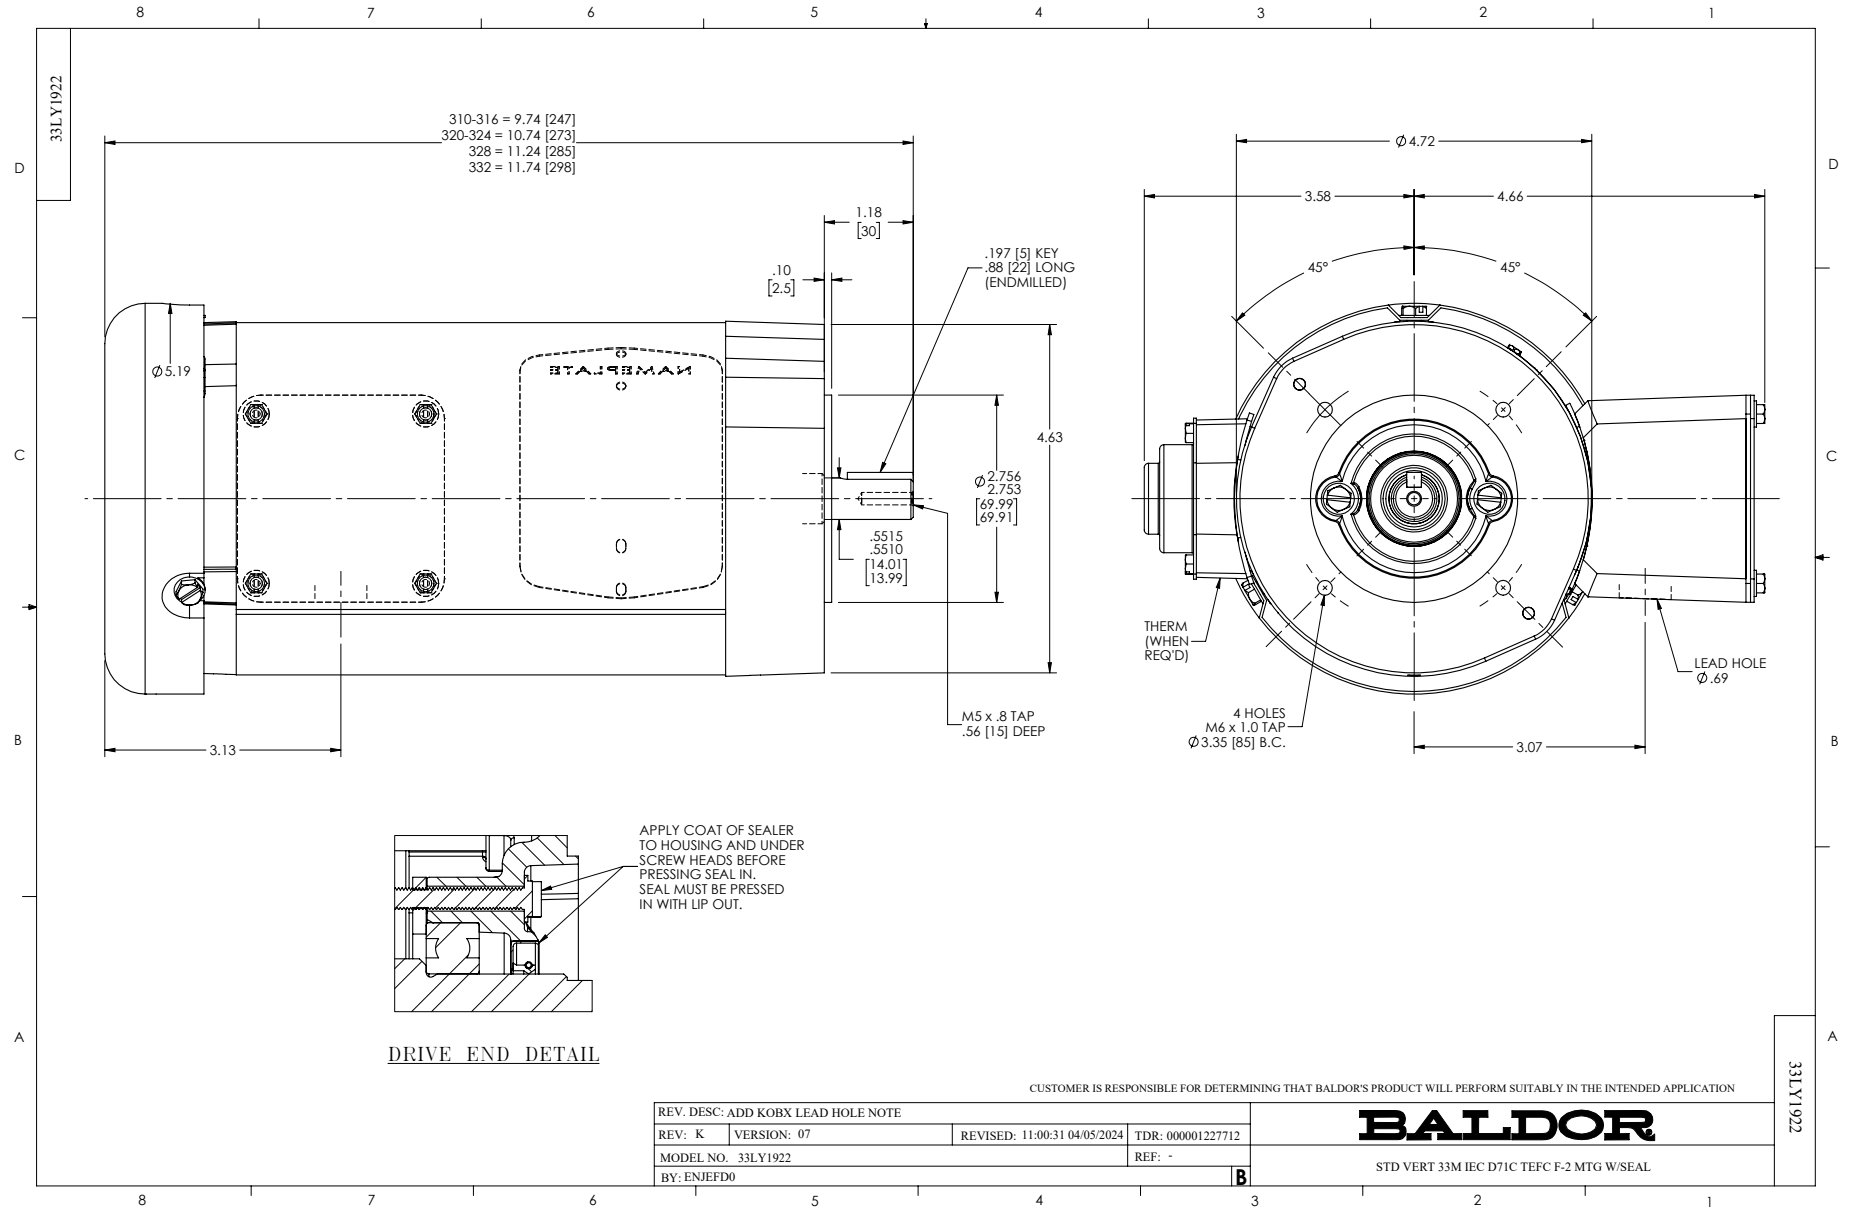



CD0005A05

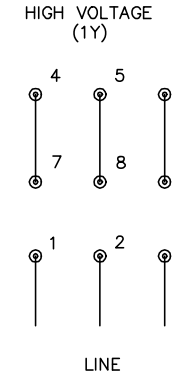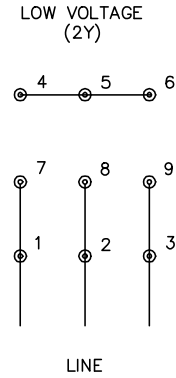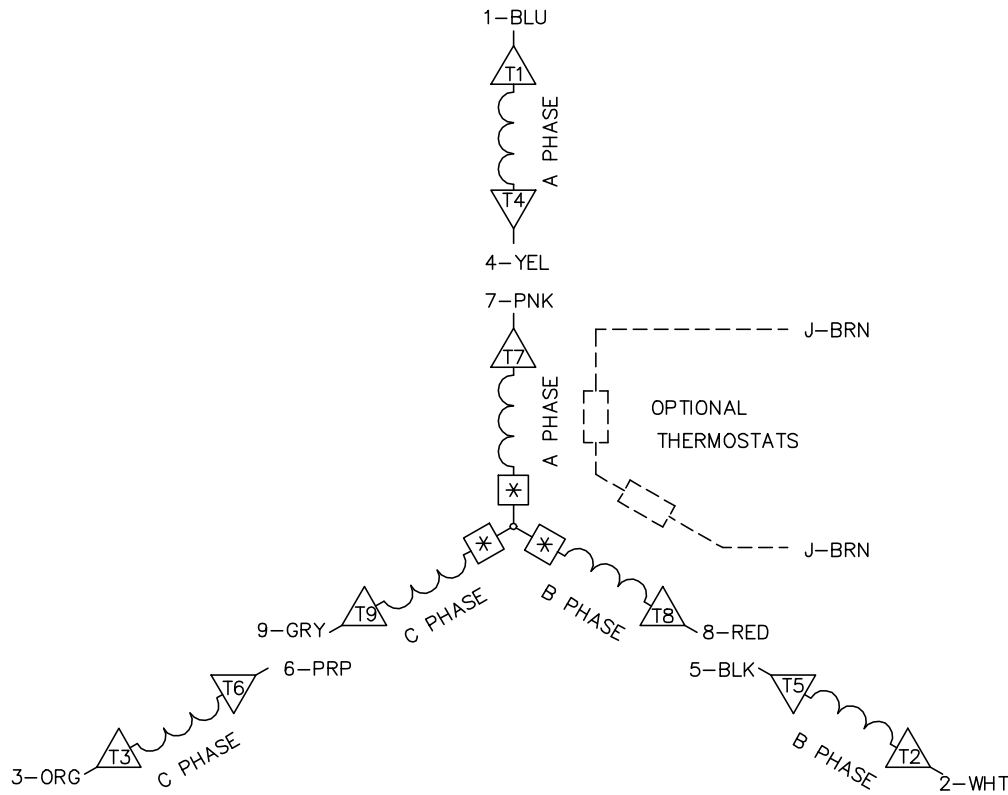

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
5. =MAGNET WIRE COIL END WITH I.D. NUMBER.
6. =MAGNET WIRE COIL END WITH I.D. SYMBOL.
7. SEE CW PRINT FOR NEST TO NEST CROSSOVER CONNECTIONS.

REV. DESC: ADD NEST NOTE		
REV. LTR: C	VERSION: 03	TDR: 000000445597
CD0005A05	FILE: \CKA\00024\847	REVISED: 12:51:06 11/15/2007
	MTL: -	BY: CKMICRO

**BALDOR • DODGE • RELIANCE**

3PH, DV, 9 LEADS, CK

CD0005A05