

ABB BALDOR RELIANCE III

Customer information packet

VJPFPM2531T-5

25HP, 1760RPM, 3PH, 60HZ, 284JP, 3956M, OPSB, F

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	284JP
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	23.000 A @ 575.0 V
Design Code	B
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Drip Cover Mounting
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	23.0 a
Insulation Class	F
Inverter Code	Not Inverter

Part Detail

Revision	Q
Type	AC
Mech. spec.	39T043
Base	
Status	PRD/A
Elec. spec.	39WGX989
Layout	39LYT043
Eff. date	06-10-2026
CD Diagram	CD0382
Poles	04
Leads	6#10
Proprietary	False
Created date	07-21-2016

KVA Code	F
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3956M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	31.44 IN
Power Factor	87
Product Family	Fire Pump Motor
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	Included
Service Factor	1.15
Shaft Diameter	1.250 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3454L													
CAT.NO.	VJPFPM2531T-5				CUST P/N					I.P.	23		
SPEC.	39T043X989H2				SER.NO.					FRAME	284JP		
HZ	60	HP	25		RPM	1760		HZ		HP		RPM	
VOLTS	575		CODE	F	VOLTS			CODE					
AMPS	23		DES	B	AMPS			DES					
EFF	92.4	SER.F.	1.15		PF	87		EFF		SER.F.		PF	
RATING	40C AMB-CONT				DE BRG	6312				GREASE	POLYREX EM		
BLANK					ODE BRG	6208				MTR. WT.	322		
					CLASS	F		PH	3				
					ENCL	OPSB		CC	010A				
HTR-VOLTS		HTR-AMPS		HTR-WATTS									

AC Induction Motor Performance Data

Record # 58303

Typical performance - not guaranteed values

Winding: 39WGX989-R001			Type: 3956M		Enclosure: OPSB		
Nameplate Data				575 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		25		Full Load Torque		75.1 LB-FT	
Volts		575		Start Configuration		direct on line	
Full Load Amps		23		Breakdown Torque		200 LB-FT	
R.P.M.		1760		Pull-up Torque		98.1 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		119 LB-FT	
NEMA Design Code		B	KVA Code	F	Starting Current		137 A
Service Factor (S.F.)		1.15		No-load Current		7.08 A	
NEMA Nom. Eff.		92.4	Power Factor	87	Line-line Res. @ 25°C		0.615 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		52°C	
S.F. Amps				Temp. Rise @ S.F. Load		66°C	
				Locked-rotor Power Factor		32.1	
				Rotor inertia		2.45 LB-FT2	

Load Characteristics 575 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	58	77	85	87	88	87	88
Efficiency	91.7	93.5	93.4	92.4	91	89.5	91.6
Speed	1790	1781	1771	1759	1746	1731	1751
Line amperes	9	12.8	18	23.4	29.1	36.1	26.8


ABB Motors and Mechanical Inc.


WINDING # 39WGX989

Typical performance - not guaranteed values.




25 HP 3 PH 60 HZ 1760 RPM 575 V 3956M

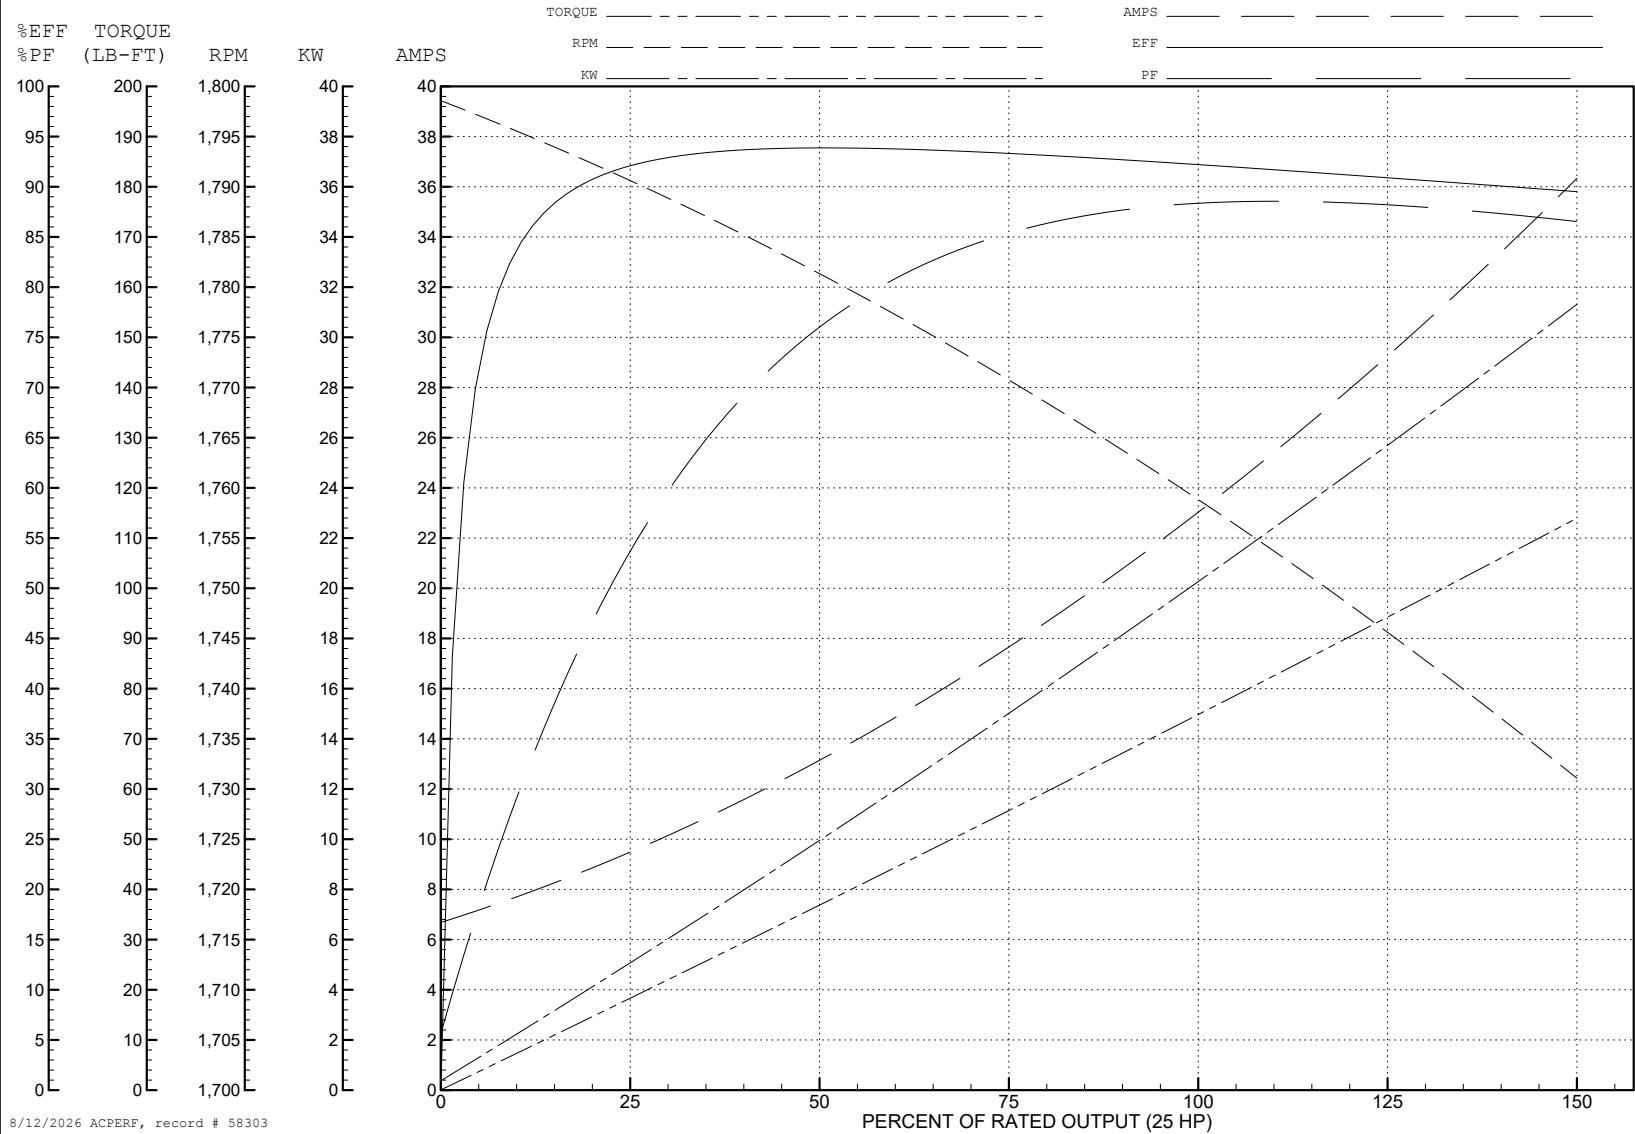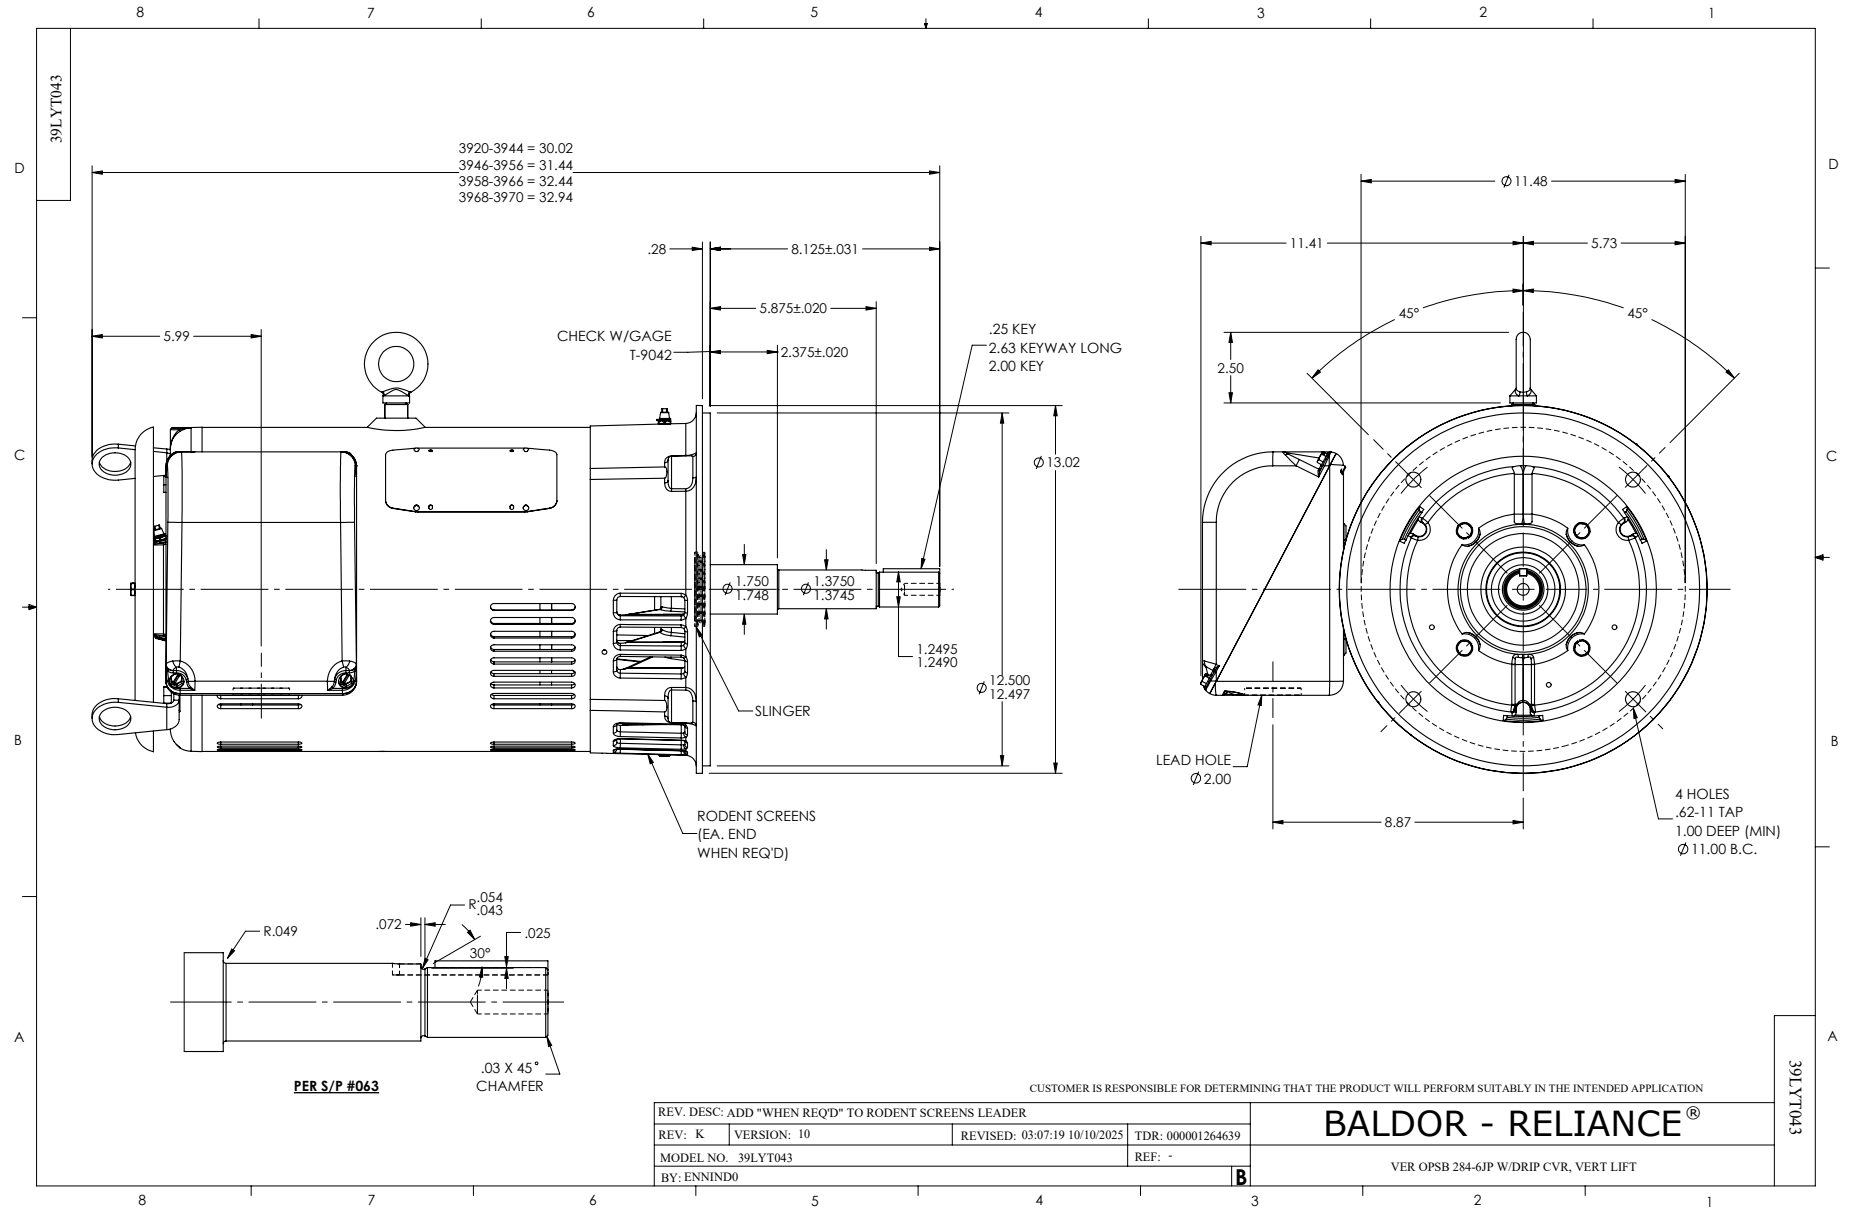TORQUES (LB-FT): PO=200 PU=98.1 LR=119 LRA=137





CD0382

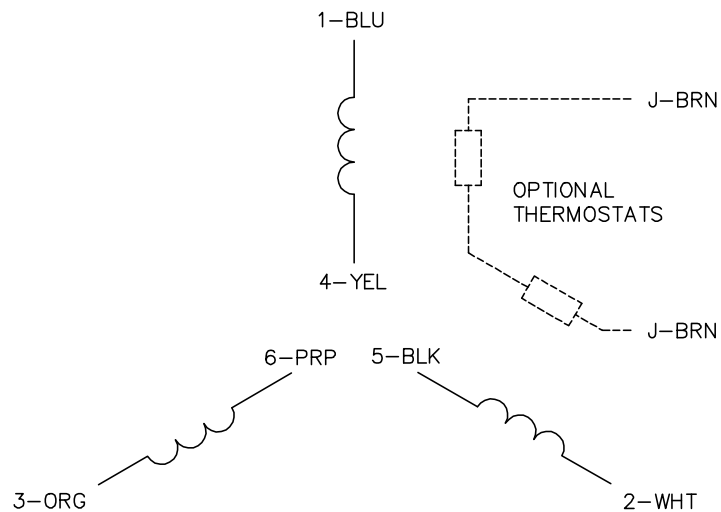
**RUN CONNECTION
(1D)**

**START CONNECTION
(1Y)**

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
5. FOR ACROSS-THE-LINE STARTING, USE 'RUN' CONNECTION.

REV. DESC: ADD CLASS CONN00000007

REV. LTR: F

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\243

REVISED: 09:05:32 02/19/2019

BY: ENBRIRO

MTL: —


BALDOR - RELIANCE®

3PH, SV, 6 LEADS, Y START/D RUN

SH 1 of 1

CD0382