

ABB BALDOR RELIANCE III

Customer information packet

CEM3156T

1HP, 1170RPM, 3PH, 60HZ, 145TC, 3526M, OPSB, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	145TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.000 A @ 230.0 V 1.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	F

Part Detail

Revision	C
Type	AC
Mech. spec.	35BB102
Base	
Status	PRD/A
Elec. spec.	35WGG019
Layout	35LYBB102
Eff. date	01-05-2026
CD Diagram	CD0005
Poles	06
Leads	9#18
Proprietary	False
Created date	02-23-2023

Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3526M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	12.13 IN
Power Factor	67
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1170 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1259L									
CAT.NO.	CEM3156T								
SPEC.	35BB102G019								
HP	1								
VOLTS	230/460								
AMP	3/1.5								
RPM	1170								
FRAME	145TC		HZ	60			PH	3	
SER.F.	1.15	CODE	J	DES	B	CL	F		
NEMA-NOM-EFF	82.5	PF	67						
RATING	40C AMB-CONT								
CC									
DE	6205		ODE	6203					
ENCL	OPSB	SN							
	SFA 3.7/1.85								

AC Induction Motor Performance Data

Record # 47385

Typical performance - not guaranteed values

Winding: 35WGM497-R051			Type: 3526M		Enclosure: OPEN	
Nameplate Data			460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		1	Full Load Torque		4.51 LB-FT	
Volts		230/460	Start Configuration		direct on line	
Full Load Amps		3.6/1.8	Breakdown Torque		15.3 LB-FT	
R.P.M.		1155	Pull-up Torque		11.1 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	11.9 LB-FT	
NEMA Design Code	B	KVA Code	K	Starting Current	10.8 A	
Service Factor (S.F.)		1.15	No-load Current		1.21 A	
NEMA Nom. Eff.	82.5	Power Factor	64	Line-line Res. @ 25°C	16.42 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		37°C	
S.F. Amps			Temp. Rise @ S.F. Load		44°C	
			Locked-rotor Power Factor		42	
			Rotor inertia		0.155 LB-FT2	

Load Characteristics 460 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	27	43	55	64	71	75	68
Efficiency	69	79.4	82.3	82.7	82	80.4	82.3
Speed	1190.4	1180.7	1170.3	1158.7	1145.5	1130.2	1151
Line amperes	1.25	1.36	1.53	1.75	2.02	2.33	1.91


ABB Motors and Mechanical Inc.


WINDING # 35WGM497

Typical performance - not guaranteed values.




1 HP 3 PH 60 HZ 1155 RPM 460 V 3526M

TORQUES (LB-FT): PO=15.3 PU=11.1 LR=11.9 LRA=10.8

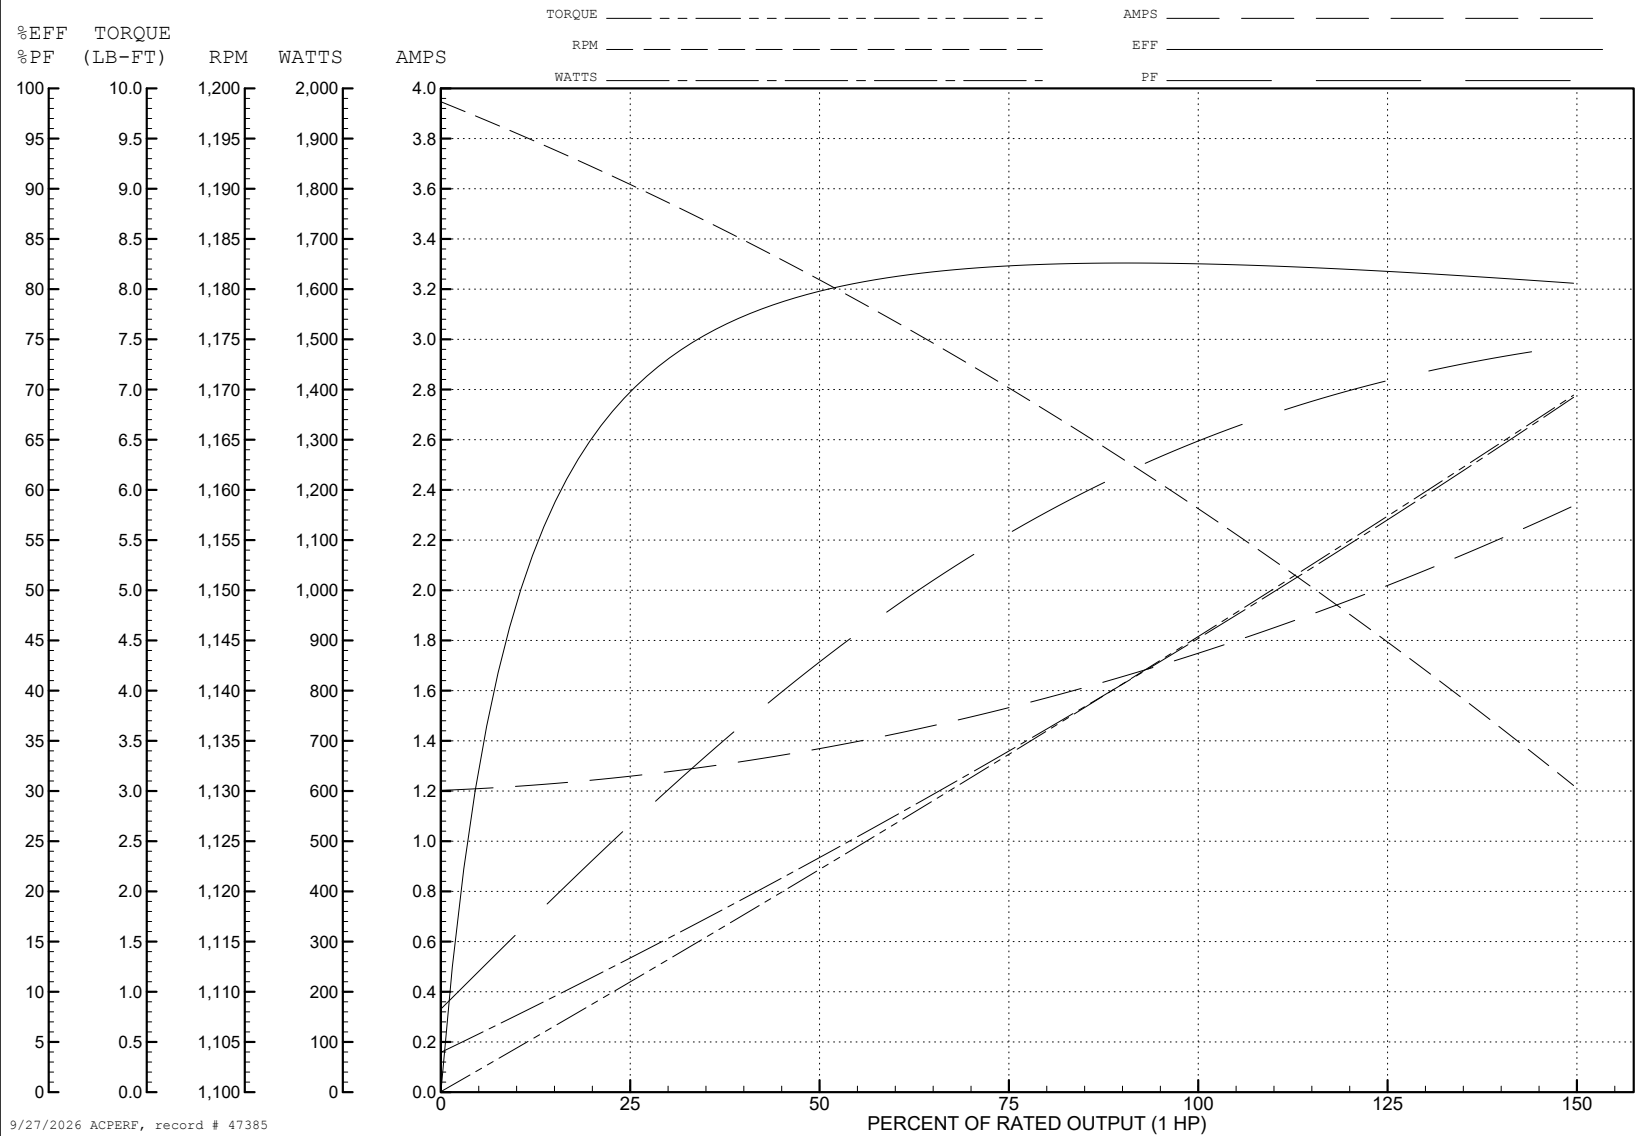

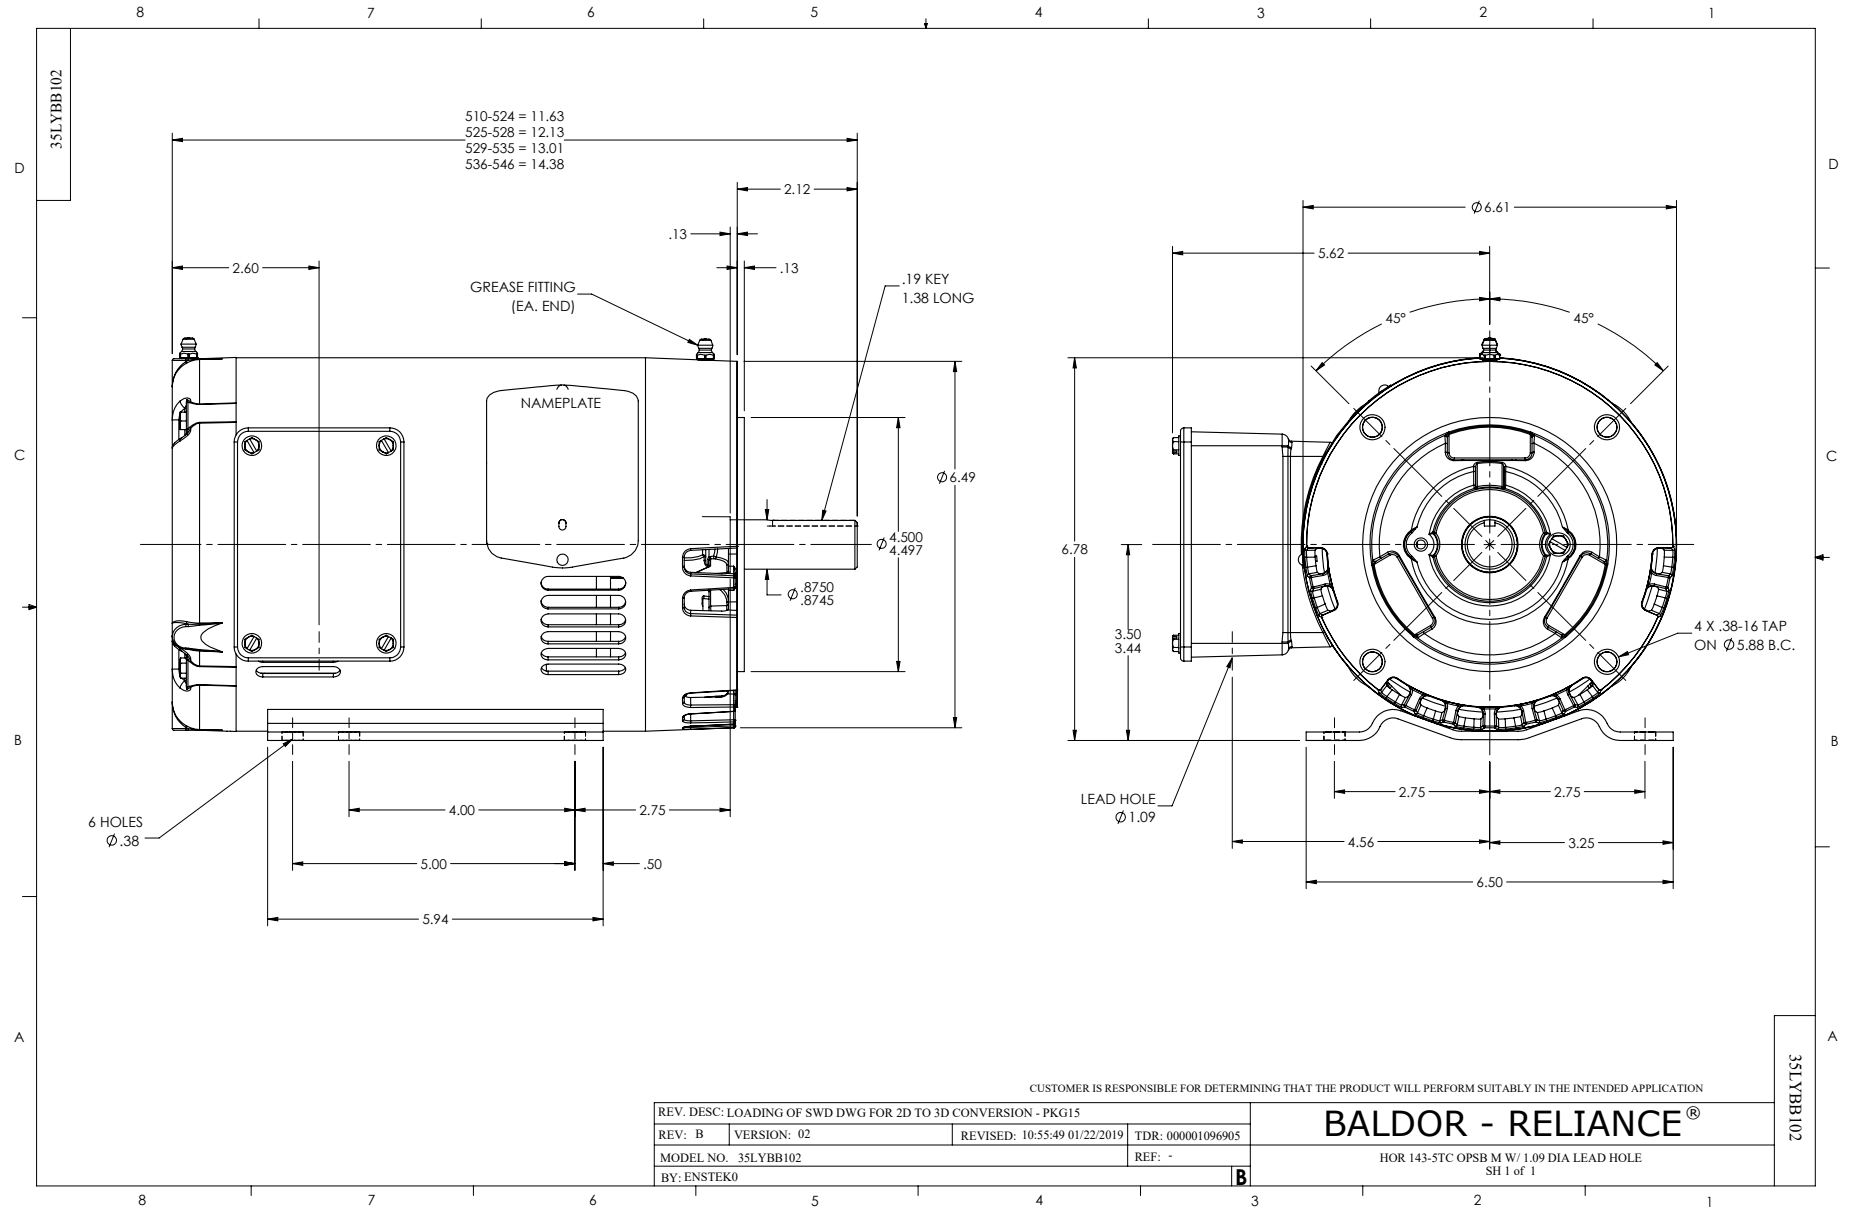

CD0005

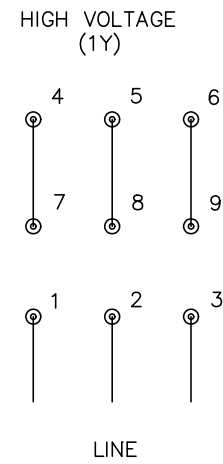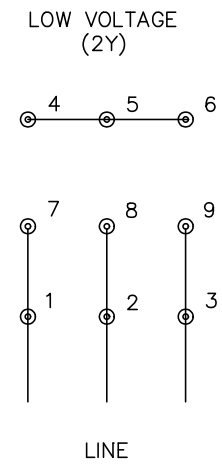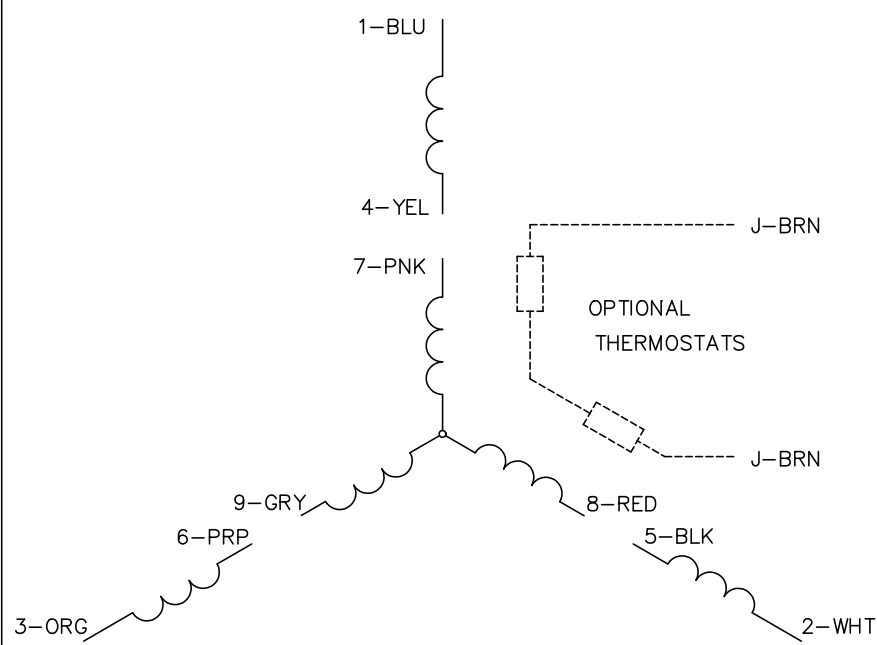

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005