ABB BALDOR RELIANCE

# Customer information packet

## CFSWDNM3555T-E

2HP, 3480RPM, 3PH, 60HZ, 145TC, 3546M, TENV, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/3/2026 5:58:15 AM

## Specifications

| | |
|---|---|
| **Enclosure** | TENV |
| **Frame** | 145TC |
| **Frame Material** | Stainless Steel |
| **Frequency** | 60.00 Hz |
| **Haz Area Class and Group** | None |
| **Haz Area Division** | Not Applicable |
| **Motor Letter Type** | Three Phase |
| **Output @ Frequency** | 2.000 HP @ 60 HZ |
| **Phase** | 3 |
| **Synchronous Speed @ Frequency** | 3600 RPM @ 60 HZ |
| **Voltage @ Frequency** | 230.0 V @ 60 HZ |
| | 460.0 V @ 60 HZ |
| **Agency Approvals** | UR |
| | CSA |
| **Ambient Temperature** | 40 °C |
| **Auxiliary Box** | NO AUXILLARY BOX |
| **Auxiliary Box Lead Termination** | None |
| **Base Indicator** | Rigid |
| **Bearing Grease Type** | Polyrex EM (-20F +300F) |
| **Blower** | None |
| **Current @ Voltage** | 2.400 A @ 460.0 V |
| | 4.800 A @ 230.0 V |
| **Design Code** | B |
| **Drip Cover** | No Drip Cover |
| **Duty Rating** | CONT |
| **Efficiency @ 100% Load** | 88.5 % |
| **Electrically Isolated Bearing** | Not Electrically Isolated |
| **Feedback Device** | NO FEEDBACK |
| **Front Face Code** | Standard |
| **Front Shaft Indicator** | None |
| **Heater Indicator** | No Heater |
| **High Voltage Full Load Amps** | 2.4 a |

## Part Detail

| | |
|---|---|
| **Revision** | L |
| **Type** | AC |
| **Mech. spec.** | 35E4742 |
| **Base** | |
| **Status** | PRD/A |
| **Elec. spec.** | 35WGL288 |
| **Layout** | 35LYE4742 |
| **Eff. date** | 04-17-2024 |
| **CD Diagram** | CD0005 |
| **Poles** | 02 |
| **Leads** | 9#18 15" LEAD LENGTH,0#,0#,0# Y |
| **Proprietary** | False |
| **Created date** | 07-25-2017 |

| | |
|---|---|
| **Insulation Class** | H |
| **Inverter Code** | Not Inverter |
| **KVA Code** | N |
| **Lifting Lugs** | No Lifting Lugs |
| **Locked Bearing Indicator** | Locked Bearing |
| **Motor Finish** | UNPAINTED |
| **Motor Lead Exit** | Ko Box |
| **Motor Lead Quantity/Wire Size** | @ 0 AWG |
| | 3 @ 18 AWG |
| **Motor Lead Termination** | Flying Leads |
| **Motor Standards** | NEMA |
| **Motor Type** | 3546M |
| **Mounting Arrangement** | F1 |
| **Number of Poles** | 2 |
| **Overall Length** | 15.09 IN |
| **Power Factor** | 89 |
| **Product Family** | WD All SS Encapsulated |
| **Pulley End Bearing Type** | Sealed Bearing |
| **Pulley Face Code** | C-Face |
| **Pulley Shaft Indicator** | Standard |
| **Rodent Screen** | None |
| **RoHS Status** | ROHS COMPLIANT |
| **Service Factor** | 1.15 |
| **Shaft Diameter** | 0.875 IN |
| **Shaft Extension Location** | Pulley End |
| **Shaft Ground Indicator** | No Shaft Grounding |
| **Shaft Rotation** | Reversible |
| **Shaft Slinger Indicator** | No Slinger |
| **Speed** | 3480 rpm |
| **Speed Code** | Single Speed |
| **Starting Method** | Direct on line |
| **Thermal Device - Bearing** | None |
| **Thermal Device - Winding** | None |
| **Vibration Sensor Indicator** | No Vibration Sensor |

| | |
|---|---|
| **Winding Thermal 1** | None |
| **Winding Thermal 2** | None |

**Nameplate**

| NP4427AAA01 | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **CAT #** | CFSWDNM3555T-E | | | **WT** | 61 | **LBS** | | | | | | |
| **SPEC** | 35E4742L288G1 | | | **ENCL** | TENV | | | | | | | |
| **SER #** | | | | **CC** | 010A | **IP** | 69 | | | | | |
| **HP** | 2 | | | **MAG CUR** | 1.7/.85 | | | | | | | |
| **VOLTS** | 230/460 | | | | | **NEMA NOM. EFF** | 88.5 | | | | | |
| **AMPS** | 4.8/2.4 | | | | | **PF** | 89 | | | | | |
| **RATING** | 40C AMB-CONT | | | | | | | | | | | |
| **RPM** | 3480 | | | | **MAX RPM** | 5400 | | | | | | |
| **FRAME** | 145TC | **HZ** | 60 | **CODE** | N | **CLASS** | H | | | | | |
| **SER.F.** | 1.15 | **SF AMP** | | | | **PH** | 3 | **DES** | B | | | |
| **DE** | 6205 | | | **ODE** | 6205 | | | | | | | |
| **LUBRICATION** | POLYREX EM | | | | | | | | | | | |
| **ID LOGO** | **INVERTER TYPE** | | | **VPWM** | | **CHP** | 60 | **TO** | 90 | | 1.5:1 | |
| **ID LOGO** | **WK2** | 0.127 | **CT** | 15 | **TO** | 60 | | 4:1 | | | | |
| **ID LOGO** | **SL HZ** | 2 | **VT** | 3 | **TO** | 60 | | 20:1 | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | **QR** | | | | | | |
| **YR** | | | | | | | | | | | | |

**AC Induction Motor Performance Data**
Record # 51581
Typical performance - not guaranteed values

| **Winding:** 35WGL288-R001 | **Type:** 3546M | **Enclosure:** TENV |
|---|---|---|

| **Nameplate Data** | | | | **460 V, 60 Hz: High Voltage Connection** | |
|---|---|---|---|---|---|
| **Rated Output (HP)** | | | 2 | **Full Load Torque** | 3.04 LB-FT |
| **Volts** | | | 230/460 | **Start Configuration** | direct on line |
| **Full Load Amps** | | | 4.8/2.4 | **Breakdown Torque** | 17.3 LB-FT |
| **R.P.M.** | | | 3480 | **Pull-up Torque** | 6.76 LB-FT |
| **Hz** | 60 | **Phase** | 3 | **Locked-rotor Torque** | 14.8 LB-FT |
| **NEMA Design Code** | B | **KVA Code** | N | **Starting Current** | 29.7 A |
| **Service Factor (S.F.)** | | | 1.15 | **No-load Current** | 0.876 A |
| **NEMA Nom. Eff.** | 88.5 | **Power Factor** | 89 | **Line-line Res. @ 25ºC** | 5.3448 Ω |
| **Rating - Duty** | | | 40C AMB-CONT | **Temp. Rise @ Rated Load** | 104°C |
| **S.F. Amps** | | | | **Temp. Rise @ S.F. Load** | 128°C |

**Load Characteristics 460 V, 60 Hz, 2 HP**

| **% of Rated Load** | **25** | **50** | **75** | **100** | **125** | **150** | **S.F.** |
|---|---|---|---|---|---|---|---|
| **Power Factor** | 54 | 75 | 85 | 89 | 91 | 93 | 90 |
| **Efficiency** | 84.9 | 89.3 | 89.9 | 89.2 | 88.1 | 86.5 | 88.5 |
| **Speed** | 3568.9 | 3541.4 | 3511.5 | 3479.4 | 3445.1 | 3406.6 | 3459 |
| **Line amperes** | 1.06 | 1.41 | 1.86 | 2.37 | 2.92 | 3.52 | 2.7 |


ABB Motors and Mechanical Inc.

WINDING # 35WGL288


2 HP 3 PH 60 HZ 3480 RPM 460 V 3546M

Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=17.3 PU=6.76 LR=14.8 LRA=29.7

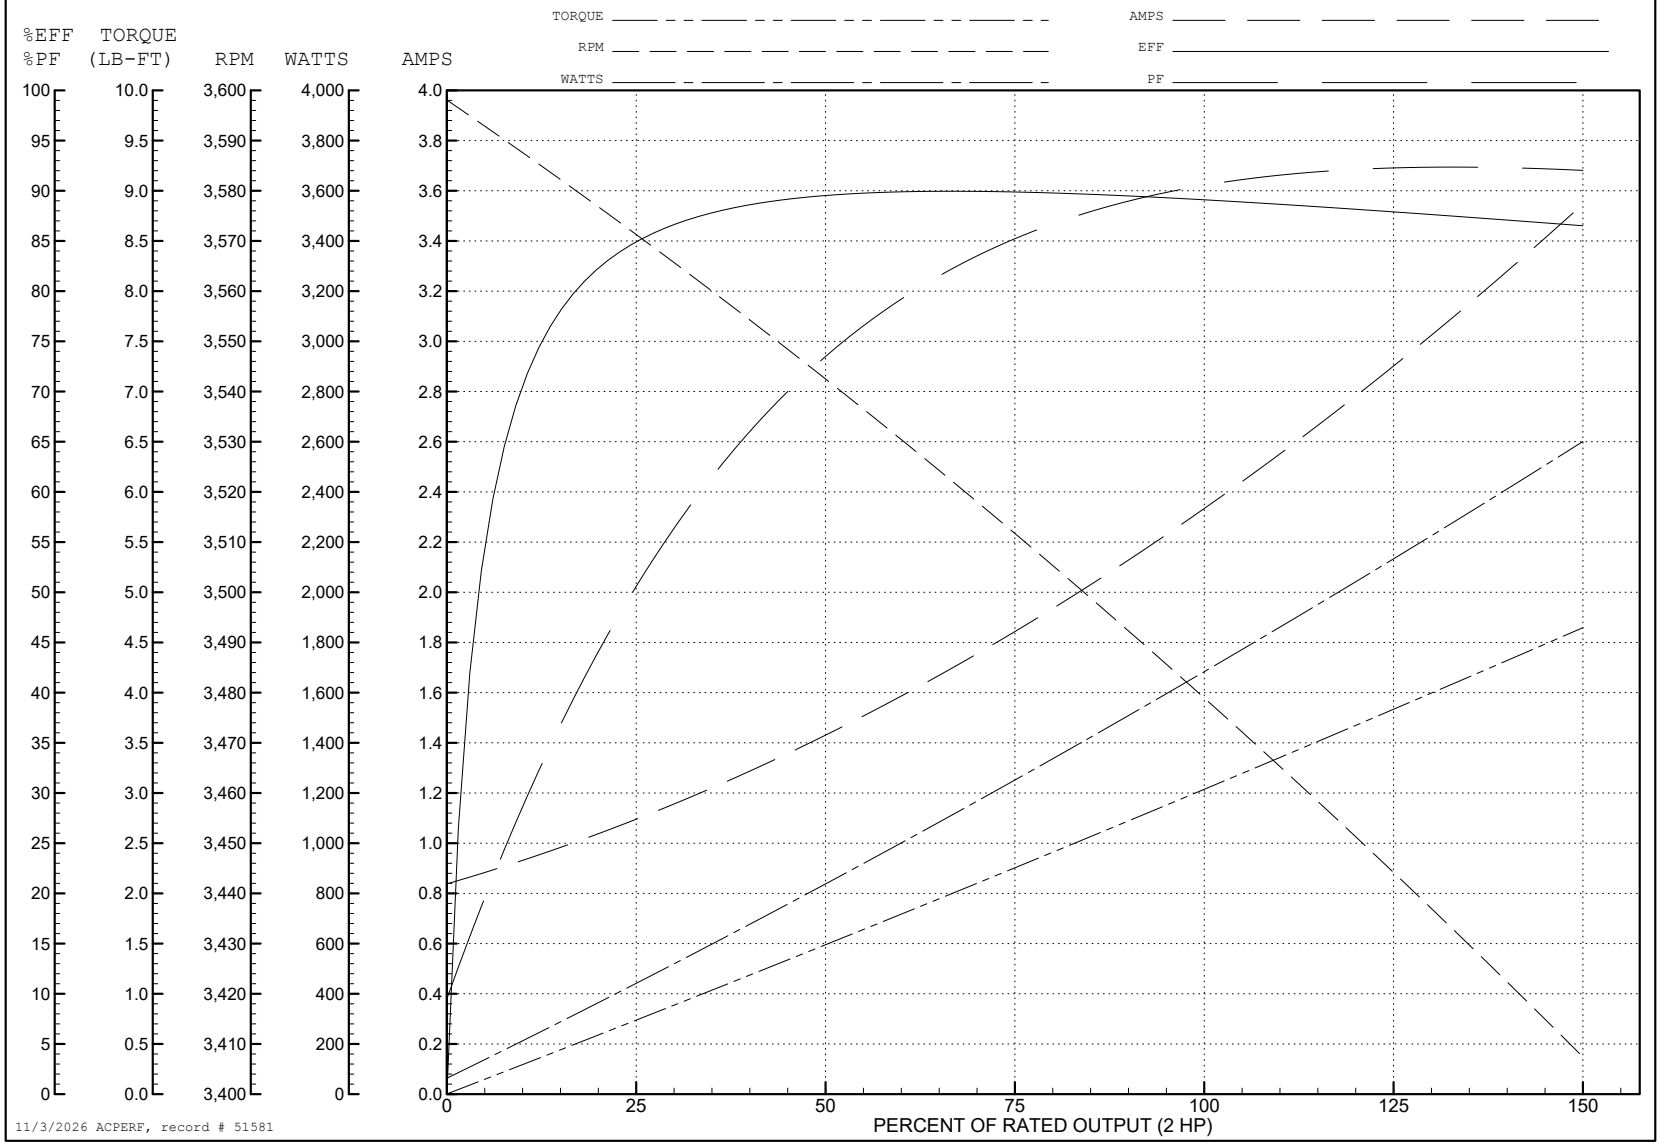



11/3/2026 ACPERF, record # 51581

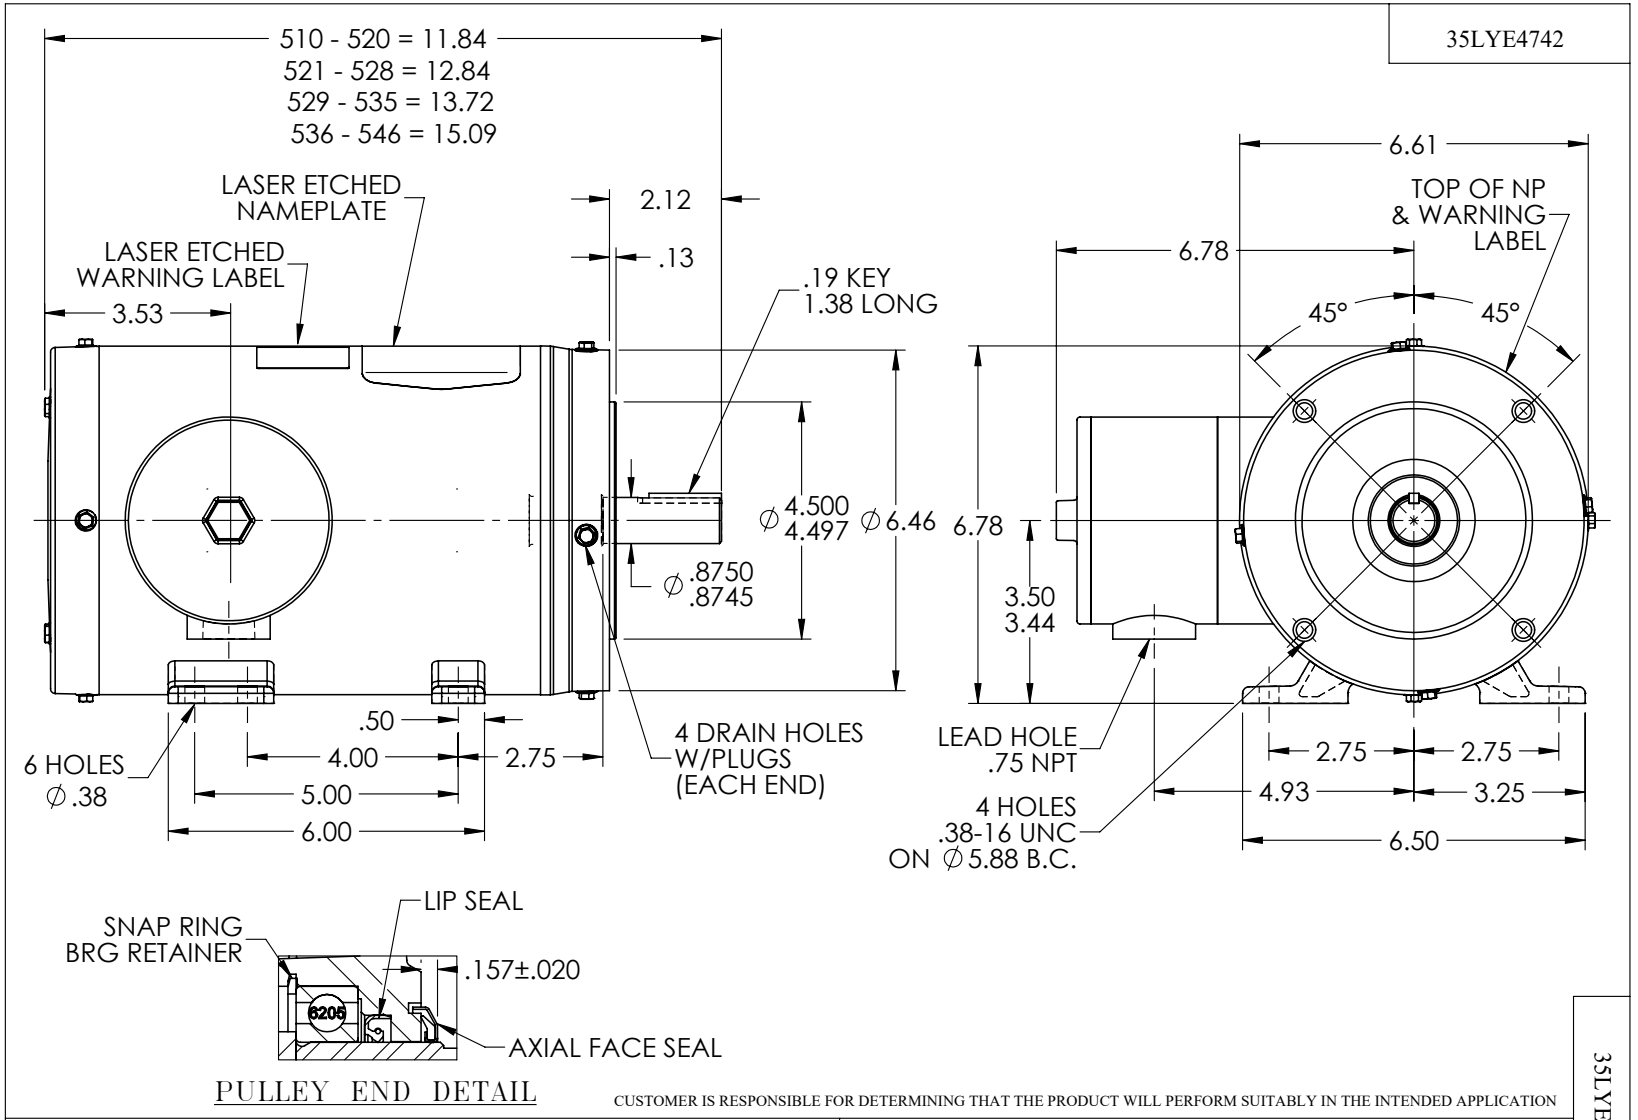
35LYE4742
510 - 520 = 11.84
521 - 528 = 12.84
529 - 535 = 13.72
536 - 546 = 15.09
LASER ETCHED NAMEPLATE
LASER ETCHED WARNING LABEL
3.53
2.12
.13
.19 KEY 1.38 LONG
∅4.500 4.497
∅6.46
∅.8750 .8745
6 HOLES ∅.38
.50
4.00
2.75
5.00
6.00
4 DRAIN HOLES W/PLUGS (EACH END)
6.61
TOP OF NP & WARNING LABEL
6.78
45°
45°
6.78
3.50 3.44
LEAD HOLE .75 NPT
4 HOLES .38-16 UNC ON ∅5.88 B.C.
2.75
2.75
4.93
3.25
6.50
LIP SEAL
SNAP RING BRG RETAINER
.157±.020
6206
AXIAL FACE SEAL
PULLEY END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: ADD DIM TO AXIAL SEAL LOCATION
REV: F
VERSION: 06
REVISED: 12:58:55 07/23/2026
TDR: 000001276312
BALDOR - RELIANCE®
35LYE4742
MODEL NO. 35LYE4742
REF: -
BY: USALMAZ
STD HORZ 143/5TC TENV 35M WD11/12
35LYE4742
35LYE4742

CD0005

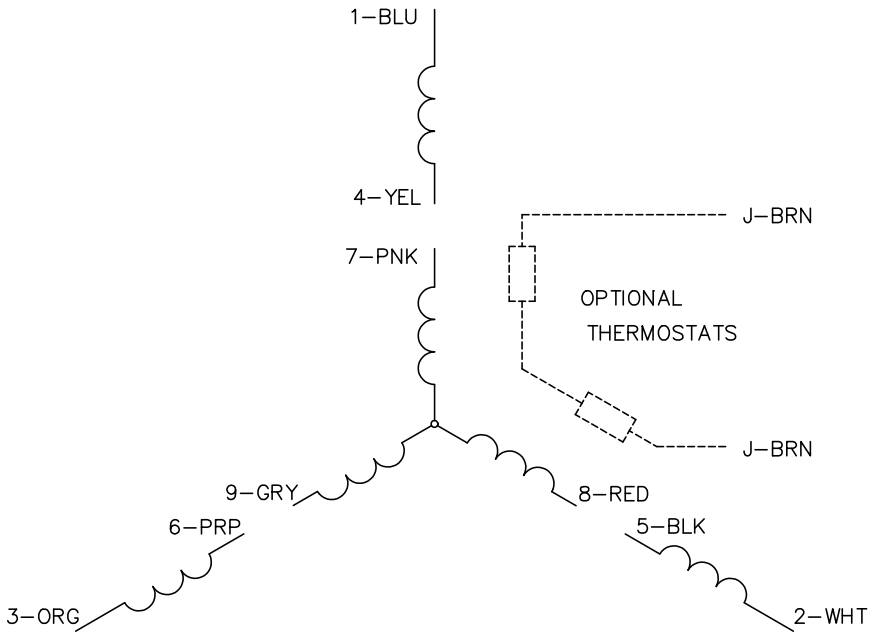

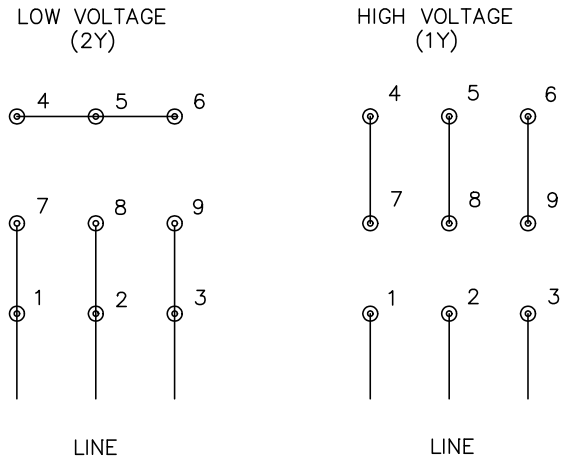
NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

| | | | |
|---|---|---|---|
| REV. DESC: REVISE TO SHOW OPTIONAL COLORS | | | BALDOR ELECTRIC Co. |
| REV. LTR: E | BY: JLP | REVISED: 01/19/99 10:15 | TDR: 0171435 |
| CD0005 | | FILE: AAA00005140 | MDL: – |
| | | MTL: – | 3PH, DV, 9 LEADS |