ABB BALDOR RELIANCE

# Customer information packet

## CL1410TM

5HP, 1725RPM, 1PH, 60HZ, 184TC, 3640LC, OPEN
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/21/2026 12:36:56 PM

## Specifications

| | |
|---|---|
| **Enclosure** | OPEN |
| **Frame** | 184TC |
| **Frame Material** | Steel |
| **Frequency** | 60.00 Hz |
| **Haz Area Class and Group** | None |
| **Haz Area Division** | Not Applicable |
| **Motor Letter Type** | Cap Start, Cap Run |
| **Output @ Frequency** | 5.000 HP @ 60 HZ |
| **Phase** | 1 |
| **Synchronous Speed @ Frequency** | 1800 RPM @ 60 HZ |
| **Voltage @ Frequency** | 230.0 V @ 60 HZ |
| **Agency Approvals** | C UR US |
| **Ambient Temperature** | 40 °C |
| **Auxiliary Box** | NO AUXILLARY BOX |
| **Auxiliary Box Lead Termination** | None |
| **Base Indicator** | Rigid |
| **Bearing Grease Type** | Polyrex EM (-20F +300F) |
| **Blower** | None |
| **Current @ Voltage** | 23.000 A @ 230.0 V<br>25.000 A @ 208.0 V |
| **Design Code** | L |
| **Drip Cover** | No Drip Cover |
| **Duty Rating** | CONT |
| **Efficiency @ 100% Load** | 82.5 % |
| **Electrically Isolated Bearing** | Not Electrically Isolated |
| **Feedback Device** | NO FEEDBACK |
| **Front Face Code** | Standard |
| **Front Shaft Indicator** | None |
| **Heater Indicator** | No Heater |
| **High Voltage Full Load Amps** | 23.0 a |
| **Insulation Class** | F |
| **Inverter Code** | Not Inverter |

## Part Detail

| | |
|---|---|
| **Revision** | AK |
| **Type** | AC |
| **Mech. spec.** | 36F484 |
| **Base** | |
| **Status** | PRD/A |
| **Elec. spec.** | 36WGW903 |
| **Layout** | 36LYF484 |
| **Eff. date** | 05-09-2024 |
| **CD Diagram** | CD0002A04 |
| **Poles** | 04 |
| **Leads** | 2#10 A PH,3#16 B&J |
| **Proprietary** | False |
| **Created date** | 01-01-0001 |

| | |
|---|---|
| **KVA Code** | G |
| **Lifting Lugs** | No Lifting Lugs |
| **Locked Bearing Indicator** | Locked Bearing |
| **Motor Lead Exit** | Ko Box |
| **Motor Lead Quantity/Wire Size** | 2 @ 10 AWG, A PH |
| **Motor Lead Termination** | Flying Leads |
| **Motor Standards** | NEMA |
| **Motor Type** | 3640LC |
| **Mounting Arrangement** | F1 |
| **Number of Poles** | 4 |
| **Overall Length** | 16.50 IN |
| **Power Factor** | 87 |
| **Product Family** | General Purpose |
| **Pulley End Bearing Type** | Ball |
| **Pulley Face Code** | C-Face |
| **Pulley Shaft Indicator** | Standard |
| **Rodent Screen** | None |
| **Service Factor** | 1.15 |
| **Shaft Diameter** | 1.125 IN |
| **Shaft Extension Location** | Pulley End |
| **Shaft Ground Indicator** | No Shaft Grounding |
| **Shaft Rotation** | Reversible |
| **Shaft Slinger Indicator** | No Slinger |
| **Speed** | 1725 rpm |
| **Speed Code** | Single Speed |
| **Starting Method** | Direct on line |
| **Thermal Device - Bearing** | None |
| **Thermal Device - Winding** | Do Not Use |
| **Vibration Sensor Indicator** | No Vibration Sensor |
| **Winding Thermal 1** | Manual Thermal Overload |
| **Winding Thermal 1 Location** | KO |
| **Winding Thermal 2** | None |

**Nameplate**

| NP1257L | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **CAT.NO.** | CL1410TM | | | | | | | | | | |
| **SPEC.** | 36F484W903 | | | | | | | | | | |
| **HP** | 5 | | | | | | | | | | |
| **VOLTS** | 230 | | | | | | | | | | |
| **AMP** | 23 | | | | | | | | | | |
| **RPM** | 1725 | | | | | | | | | | |
| **FRAME** | 184TC | | | **HZ** | 60 | | | **PH** | 1 | | |
| **SER.F.** | 1.15 | **CODE** | G | **DES** | L | **CL** | F | | | | |
| **NEMA-NOM-EFF** | 82.5 | **PF** | 87 | | | | | | | | |
| **RATING** | 40C AMB-CONT | | | | | | | | | | |
| **CC** | | | | | | | | | | | |
| **DE** | 6206 | **ODE** | 6205 | | | | | | | | |
| **ENCL** | OPEN | **SN** | | | | | | | | | |

**AC Induction Motor Performance Data**
Record # 10877
Typical performance - not guaranteed values

| **Winding:** 36WGW903-R001 | **Type:** 3640LC | **Enclosure:** OPEN |
|---|---|---|

| **Nameplate Data** | | | | **230 V, 60 Hz: Single Voltage Motor** | |
|---|---|---|---|---|---|
| **Rated Output (HP)** | | | 5 | **Full Load Torque** | 15 LB-FT |
| **Volts** | | | 230 | **Start Configuration** | direct on line |
| **Full Load Amps** | | | 23 | **Breakdown Torque** | 34 LB-FT |
| **R.P.M.** | | | 1725 | **Pull-up Torque** | 28 LB-FT |
| **Hz** | 60 | **Phase** | 1 | **Locked-rotor Torque** | 41 LB-FT |
| **NEMA Design Code** | L | **KVA Code** | G | **Starting Current** | 140 A |
| **Service Factor (S.F.)** | | | 1.15 | **No-load Current** | 8.4 A |
| **NEMA Nom. Eff.** | 82.5 | **Power Factor** | 87 | **Line-line Res. @ 25ºC** | 0.45 Ω A Ph<br>1.56 Ω B Ph |
| **Rating - Duty** | | | 40C AMB-CONT | **Temp. Rise @ Rated Load** | 90°C |
| **S.F. Amps** | | | | **Temp. Rise @ S.F. Load** | 110°C |

**Load Characteristics 230 V, 60 Hz, 5 HP**

| **% of Rated Load** | **25** | **50** | **75** | **100** | **125** | **150** | **S.F.** |
|---|---|---|---|---|---|---|---|
| **Power Factor** | 60 | 78 | 86 | 89 | 91 | 91 | 0 |
| **Efficiency** | 67.2 | 79.2 | 82.7 | 83 | 81.5 | 78.5 | 0 |
| **Speed** | 1786 | 1772 | 1756 | 1739 | 1718 | 1691 | 0 |
| **Line amperes** | 10.1 | 13.2 | 17.2 | 21.9 | 27.4 | 34 | 25.2 |


ABB Motors and Mechanical Inc.


WINDING # 36WGW903

5 HP 1 PH 60 HZ 1725 RPM 230 V 3640LC


Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=34 PU=28 LR=41 LRA=140

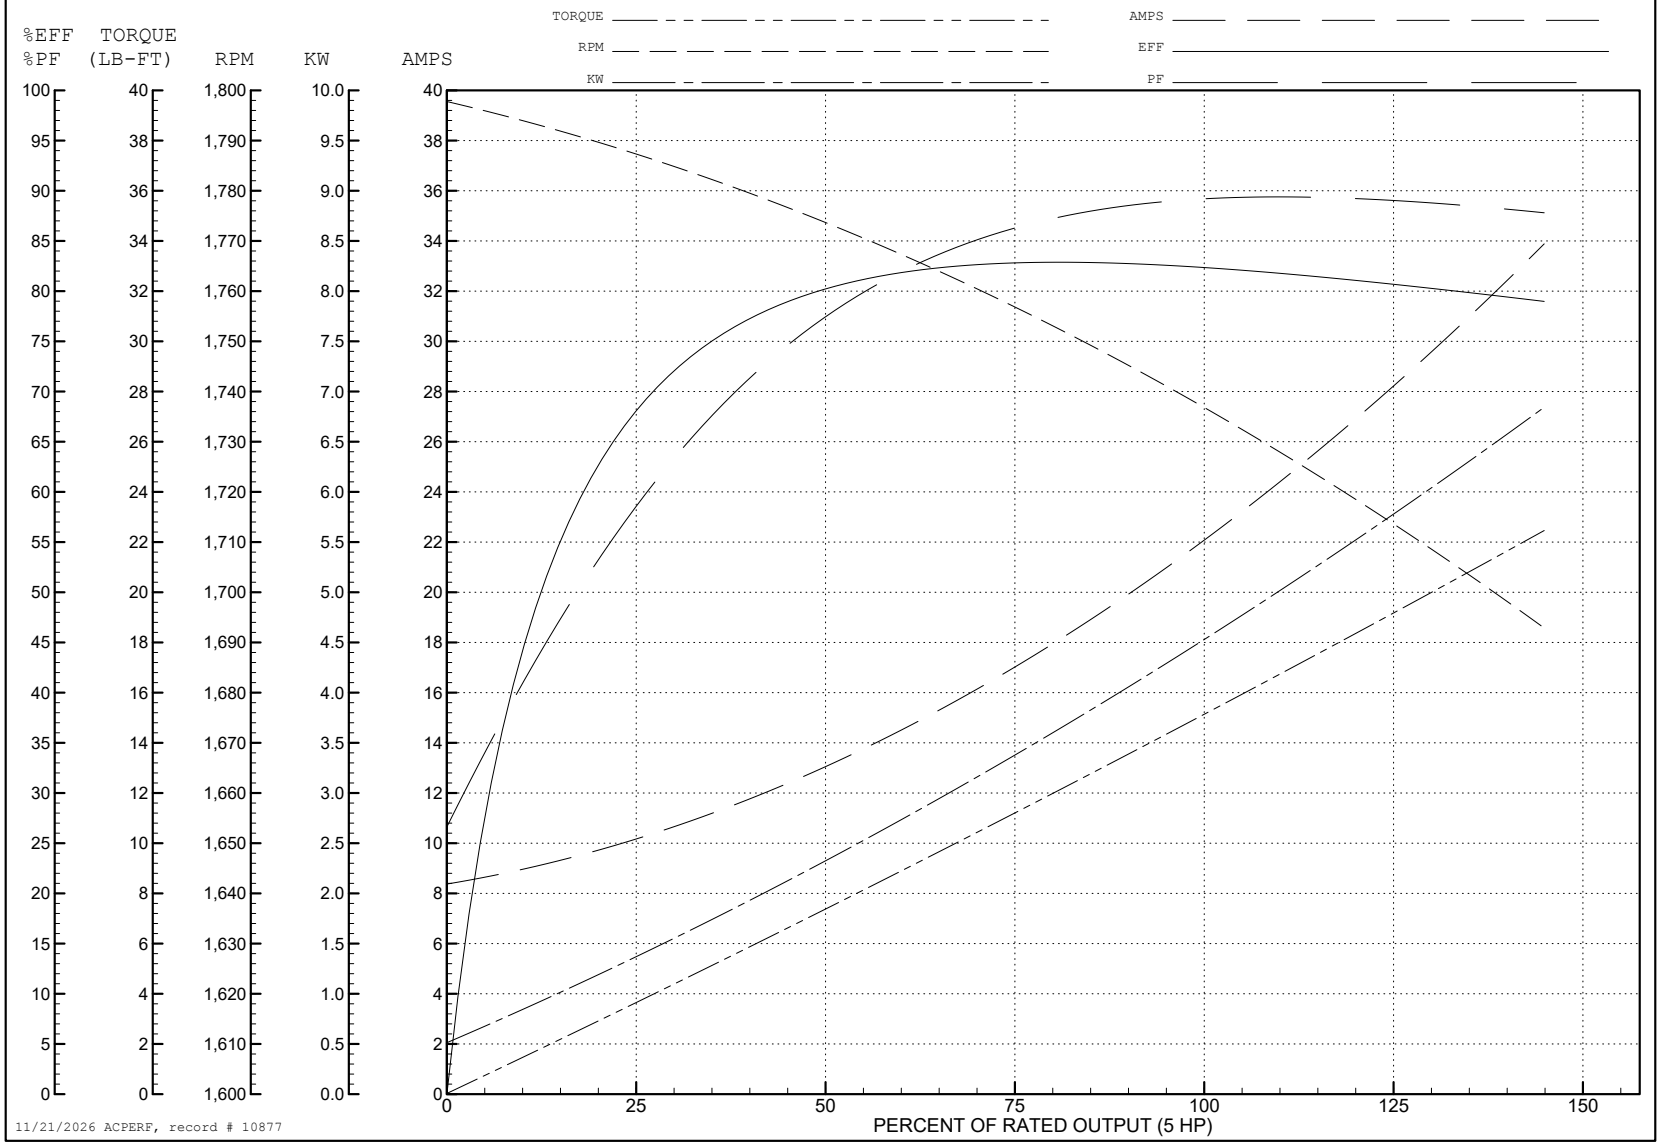

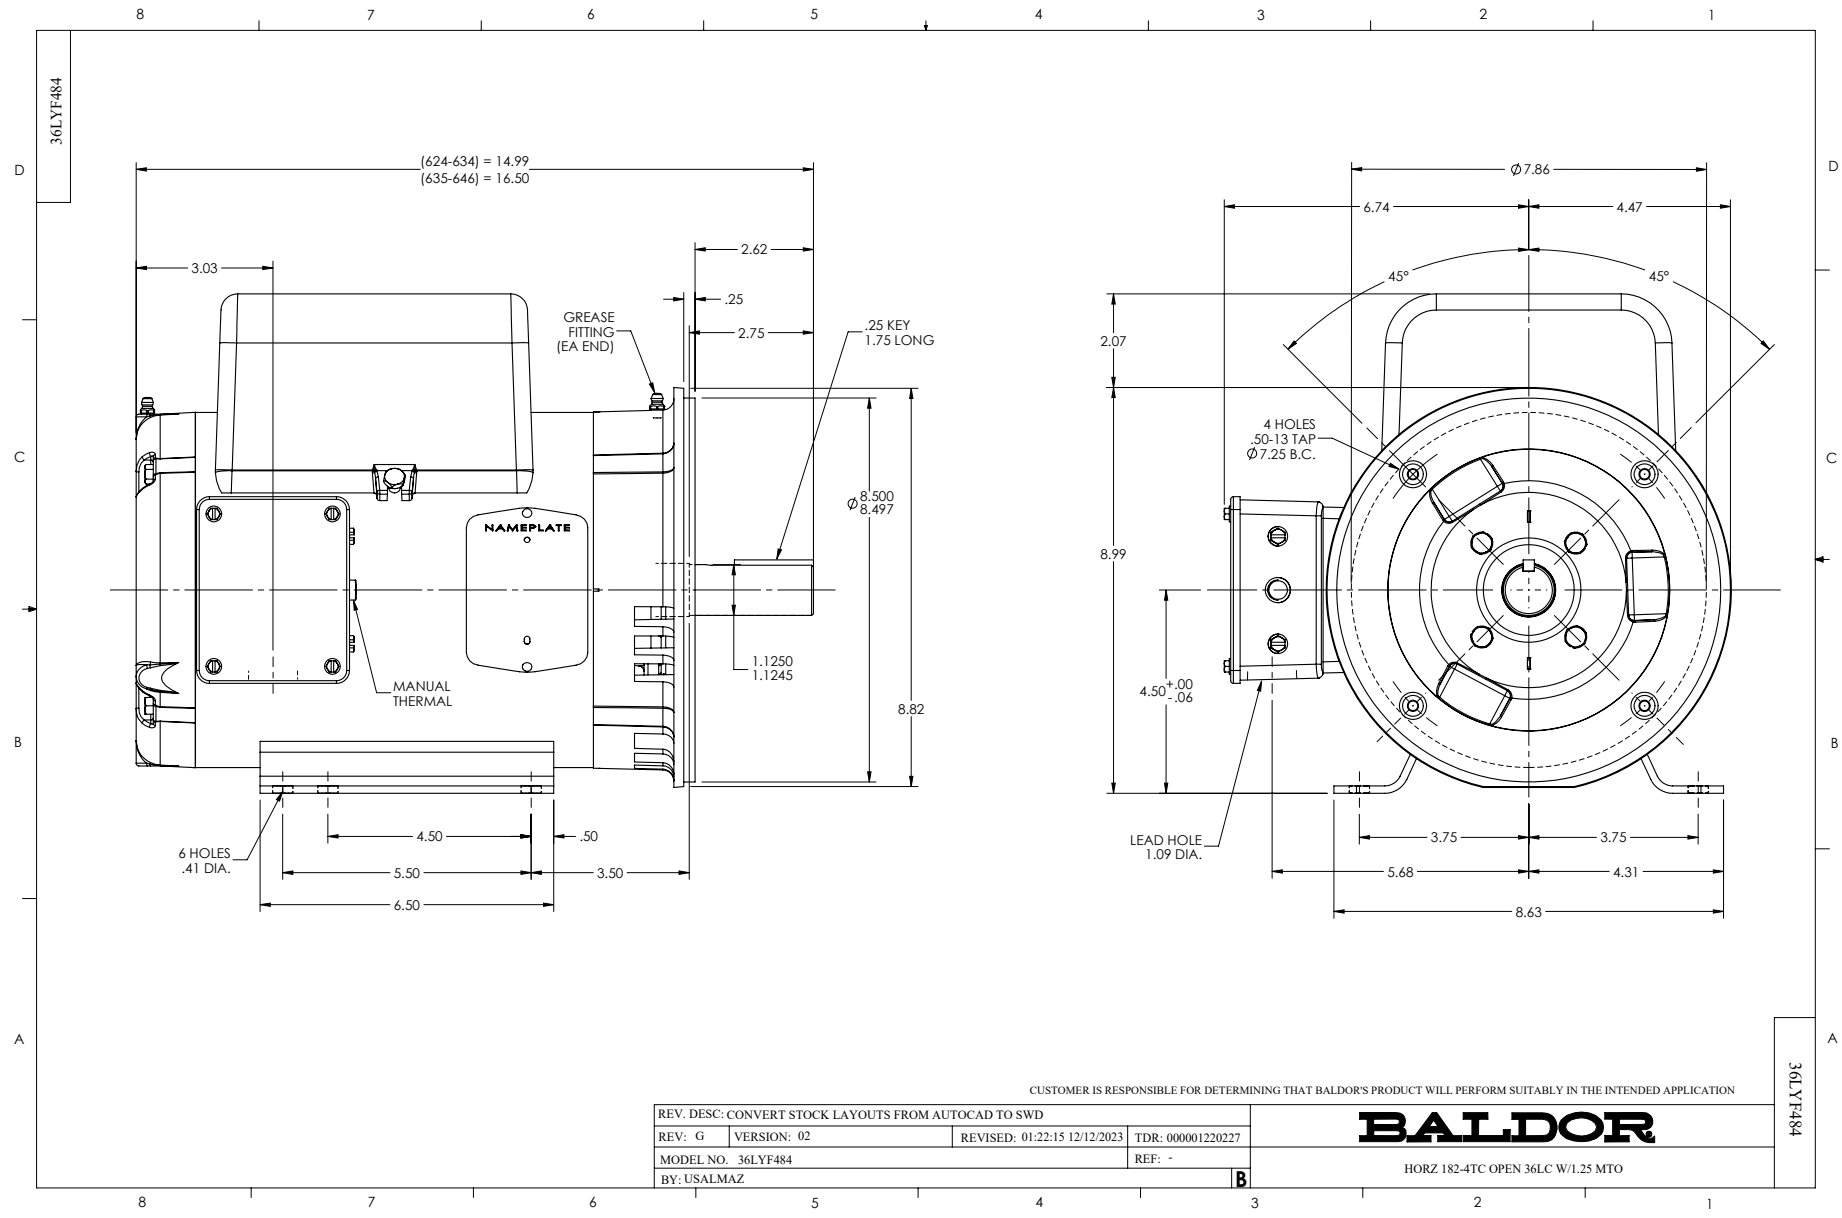
36LYF484
(624-634) = 14.99
(635-646) = 16.50
3.03
2.62
.25
2.75
GREASE FITTING (EA END)
.25 KEY 1.75 LONG
NAMEPLATE
Ø 8.500 8.497
1.1250 1.1245
MANUAL THERMAL
8.82
6 HOLES .41 DIA.
4.50
.50
5.50
3.50
6.50
Ø7.86
6.74
4.47
45°
45°
2.07
4 HOLES .50-13 TAP Ø7.25 B.C.
8.99
4.50 +.00 -.06
LEAD HOLE 1.09 DIA.
3.75
3.75
5.68
4.31
8.63
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERT STOCK LAYOUTS FROM AUTOCAD TO SWD
REV: G
VERSION: 02
REVISED: 01:22:15 12/12/2023
TDR: 000001220227
MODEL NO. 36LYF484
REF: -
BY: USALMAZ
B
BALDOR
HORZ 182-4TC OPEN 36LC W/1.25 MTO
36LYF484

CD0002A04

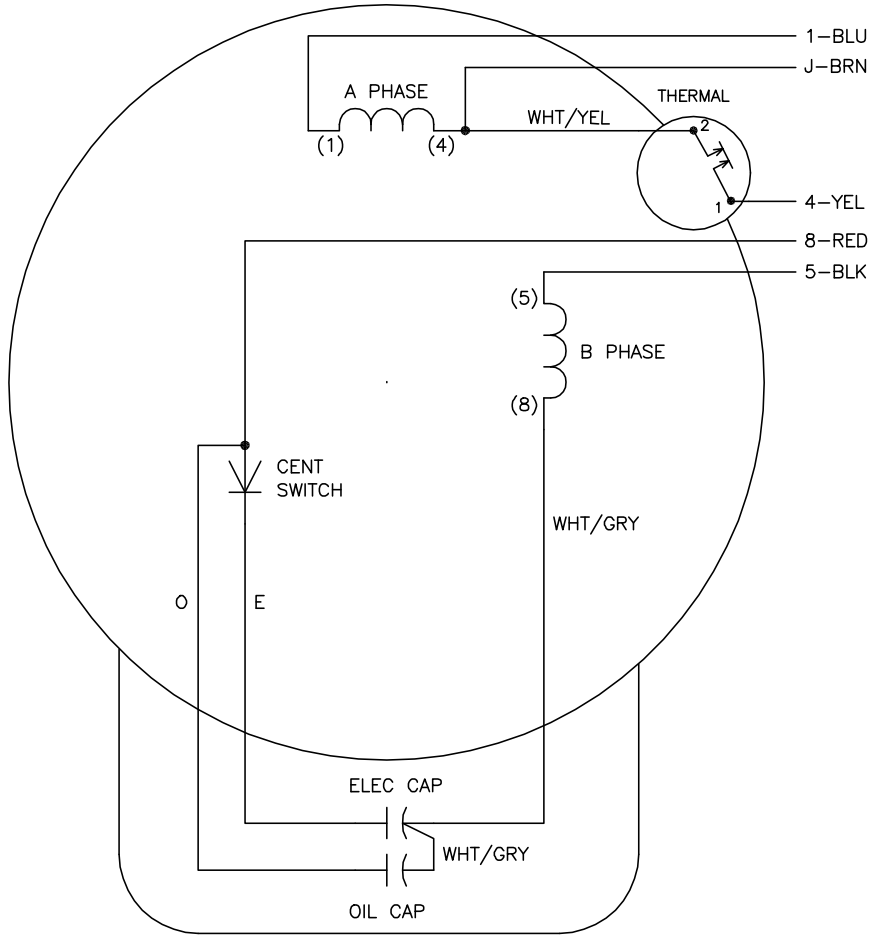



| | LINE A | LINE B | JOIN |
|---|---|---|---|
| STD | 1,8 | 4 | J,5 |
| OPP | 1,5 | 4 | J,8 |

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

BYPASSING THE HEATER OF A THREE–TERMINAL THERMAL

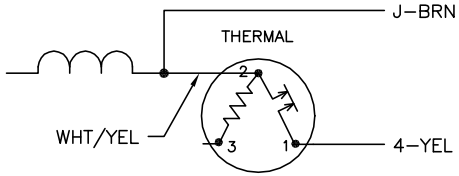


| | | | |
|---|---|---|---|
| REV. DESC: NEW | | | BALDOR ELECTRIC Co. |
| REV. LTR: – | VERSION: 00 | TDR: 000000360649 | |
| CD0002A04 | FILE: \AAA\00126\009 | REVISED: 17:08:44 04/15/2005 | TYPE LC, SV, REV, 2–TERMINAL THERMAL, 5 LEADS |
| | MTL: – | BY: ENJOEP0 | |

CD0002A04