ABB BALDOR RELIANCE

Customer information packet

ECP4313T

75HP, 3555RPM, 3PH, 60HZ, 365TS, A36068M, TEFC
Class - CLI GP A,B,C,D
Division - Division II

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
9/9/2026 1:43:35 PM

Specifications

Enclosure	TEFC
Frame	365TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	75.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
	NEMA PREMIUM
	NEMA_PREMIUM
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	10-60
Current @ Voltage	80.700 A @ 460.0 V
	161.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	80.7 a
Insulation Class	F

Part Detail

Revision	AA
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG0107
Layout	617428-036
Eff. date	08-26-2024
CD Diagram	416820-002
Poles	02
Leads	3#2,6#4
Proprietary	False
Created date	10-19-2010

Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	F
Lifting Lugs	No Lifting Lugs
Max Speed	4500 rpm
Motor Lead Quantity/Wire Size	3 @ 2 AWG
Motor Standards	NEMA
Motor Type	A36068M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	31.37 IN
Power Factor	92
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3555 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP4033LUA

CAT #	ECP4313T			**SER**				**CC**	010A										
SPEC	P36G402			**RATING**	40C AMB-CONT														
HZ	**VOLTS**			**AMPS**			**RPM**	**HP**	**CODE**	-	**SF**		**DES**	**PF**		**NEMA NOM. EFF**			
60	230/460			161/80.7			3555	75	F		1.15		B	92	%	93.6	%		
															%		%		
PH	3	**CL**	F	**MAX RPM**	4500		**MAX CORR KVAR**	5											
BRG	**DE**	6313		**ODE**	6313		**ENCL**	TEFC		**FR**	365TS			**IP**	55				
GREASE	POLYREX EM									**MTR WT**	915	**LBS**							
			CL I DIV 2 GRPS A,B,C,D				**CL I ZONE 2 GRPS**				**IIA,IIB,IIC**			**TEMP T**	200	**C**			
	INV READY	**CT**	15-60	**HZ**	4:1	**VT**	3-60	**HZ**	20:1	**CHP**	60-75	**HZ**	1.25:1						
	INV TEMP CL	200	**C**	**USABLE AT**	50HZ 60HP 190/380V 156/78A						SF1.0								

S/O	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	365TS	75	P	3/60	3555	230/460

AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
161/80.7	CONT	40/F	1.15	B	F	TEFC

E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)
892019	418141005TE	---	---	.0186/.0744

PERFORMANCE

LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY
NO LOAD	0	15.5	3600	8.92	0
1/4	18.8	24.5	3589	77.9	91.9
2/4	37.5	40.9	3579	90.9	94.5
3/4	56.2	60.2	3567	92.2	94.8
4/4	75.0	81.1	3555	91.6	94.5
5/4	93.8	103	3542	90.9	93.9

SPEED TORQUE

	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES
LOCKED ROTOR	0	218	242	520
PULL UP	1565	189	210	440
BREAKDOWN	3395	227	251	259
FULL LOAD	3555	100	111	81.1

AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

TYPICAL DATA
XE MOTOR-NEMA NOM. EFF. 93.6 %
GUARANTEED MIN. EFF. 92.4%

BALDOR
A MEMBER OF THE ABB GROUP

DRAWN BY: J.J.HARRISON
CHECKED BY: G. R. WEBB
APPROVED BY: W.L.SMITH
DATE: 10/16/02

AC MOTOR PERFORMANCE DATA

A36WG0107-R001

DATE ISSUED 12/14/10

FRAME 365TS	RPM 3555	S.F. 1.15	ROTOR 418141005TE
HP 75	VOLTS 230/460	NEMA DESIGN B	TEST S.O. TYPICAL DATA
TYPE P	AMPS 161/80.7	CODE LETTER F	TEST DATE ---
PHASE / HERTZ 3/60	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25°C .0186/.0744
	AMB °C / INSUL 40/F	E/S 892019	OHMS (BETWEEN LINES)

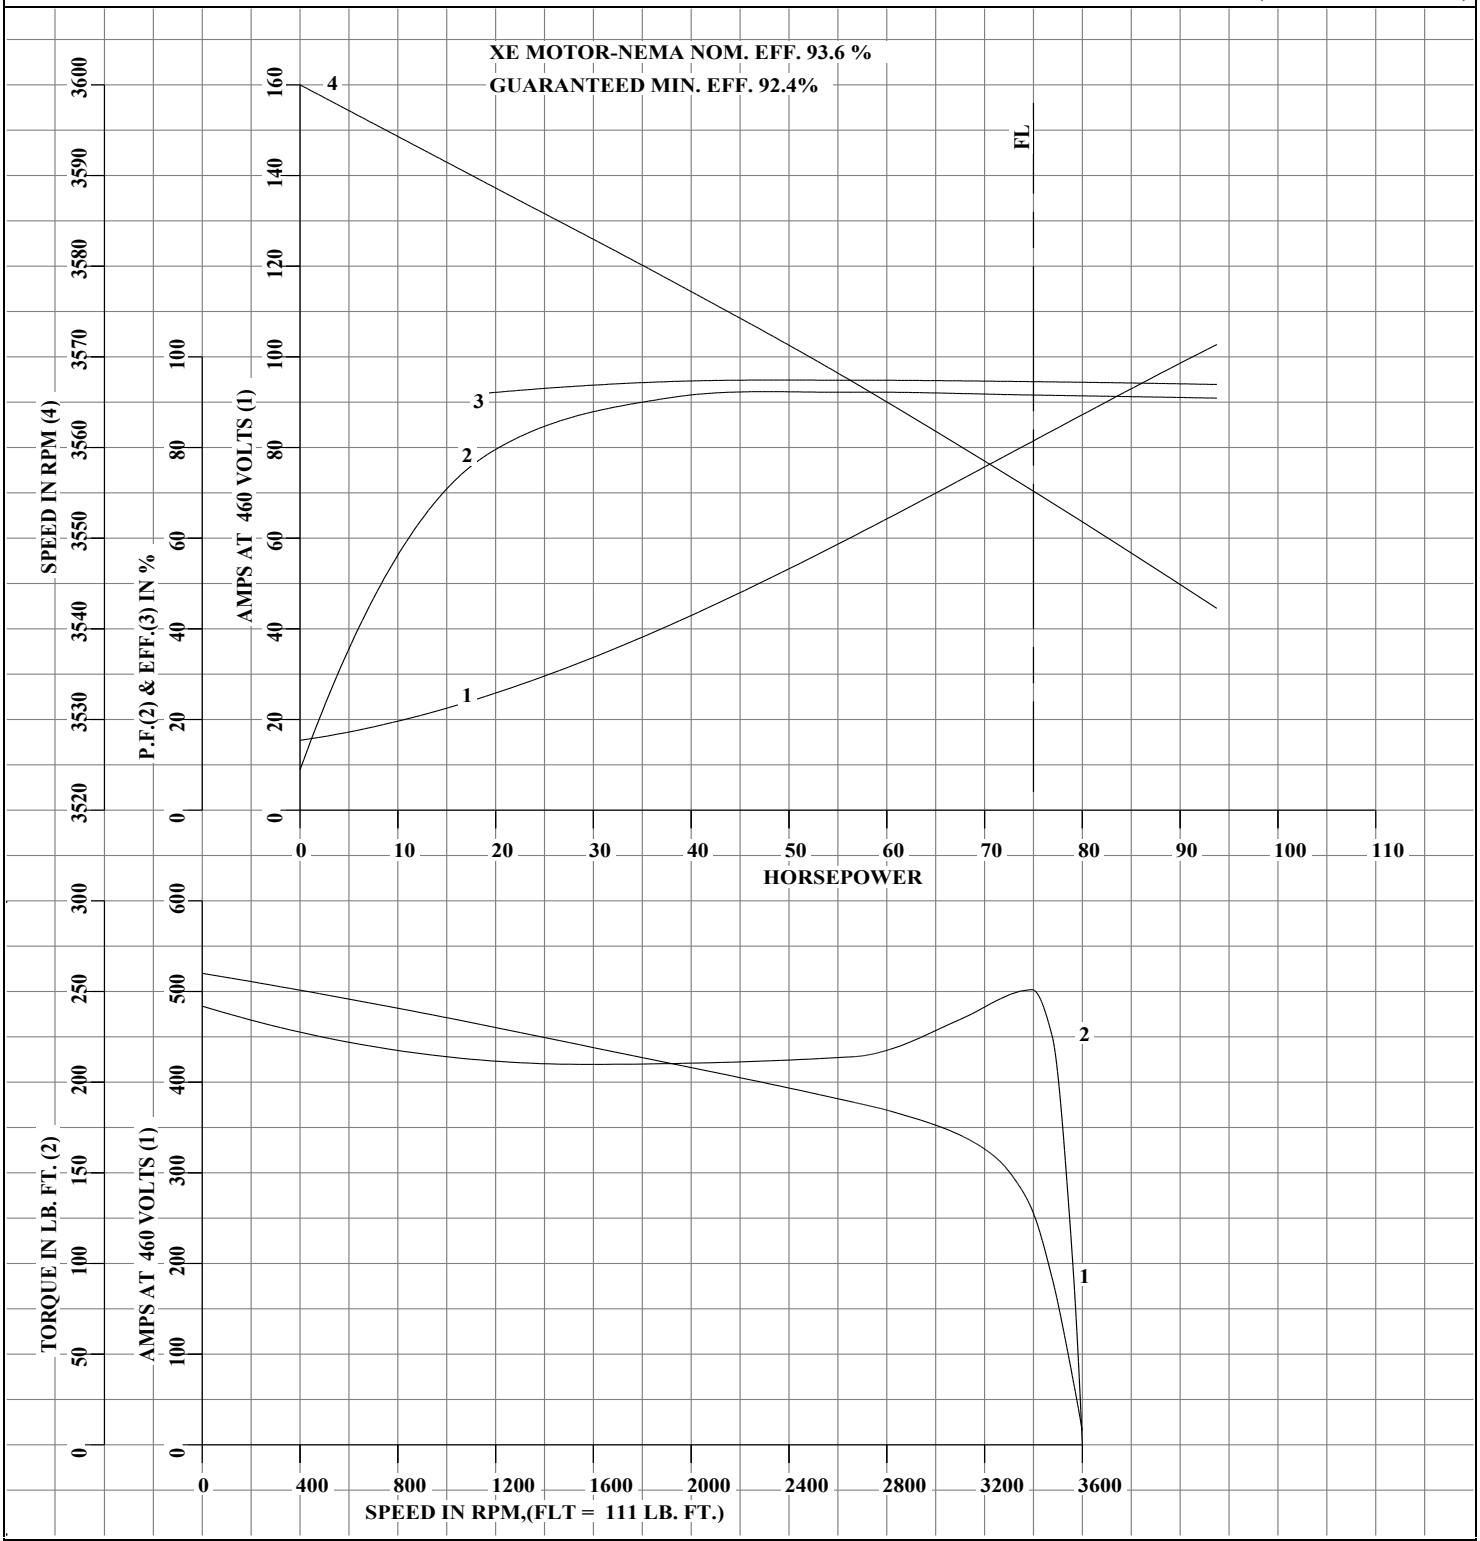

AMPERES SHOWN FOR 230/460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR
A MEMBER OF THE ABB GROUP

DRAWN BY: J.J.HARRISON
CHECKED BY: G. R. WEBB
APPROVED BY: W.L.SMITH
DATE: 10/16/02

AC MOTOR PERFORMANCE DATA

A36WG0107-R001

ISSUE DATE 12/14/10

FRAME 365TS	RPM 3555	S.F. 1.15	ROTOR 4181410051E
HP 75	VOLTS 230/460	NEMA DESIGN B	TEST S.O. TYPICAL DATA
TYPE P	AMPS 161/80.7	CODE LETTER F	TEST DATE ---
PHASE / HERTZ 3/60	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25°C .0186/.0744
	AMB °C / INSUL 40/F	E/S 892019	OHMS (BETWEEN LINES)

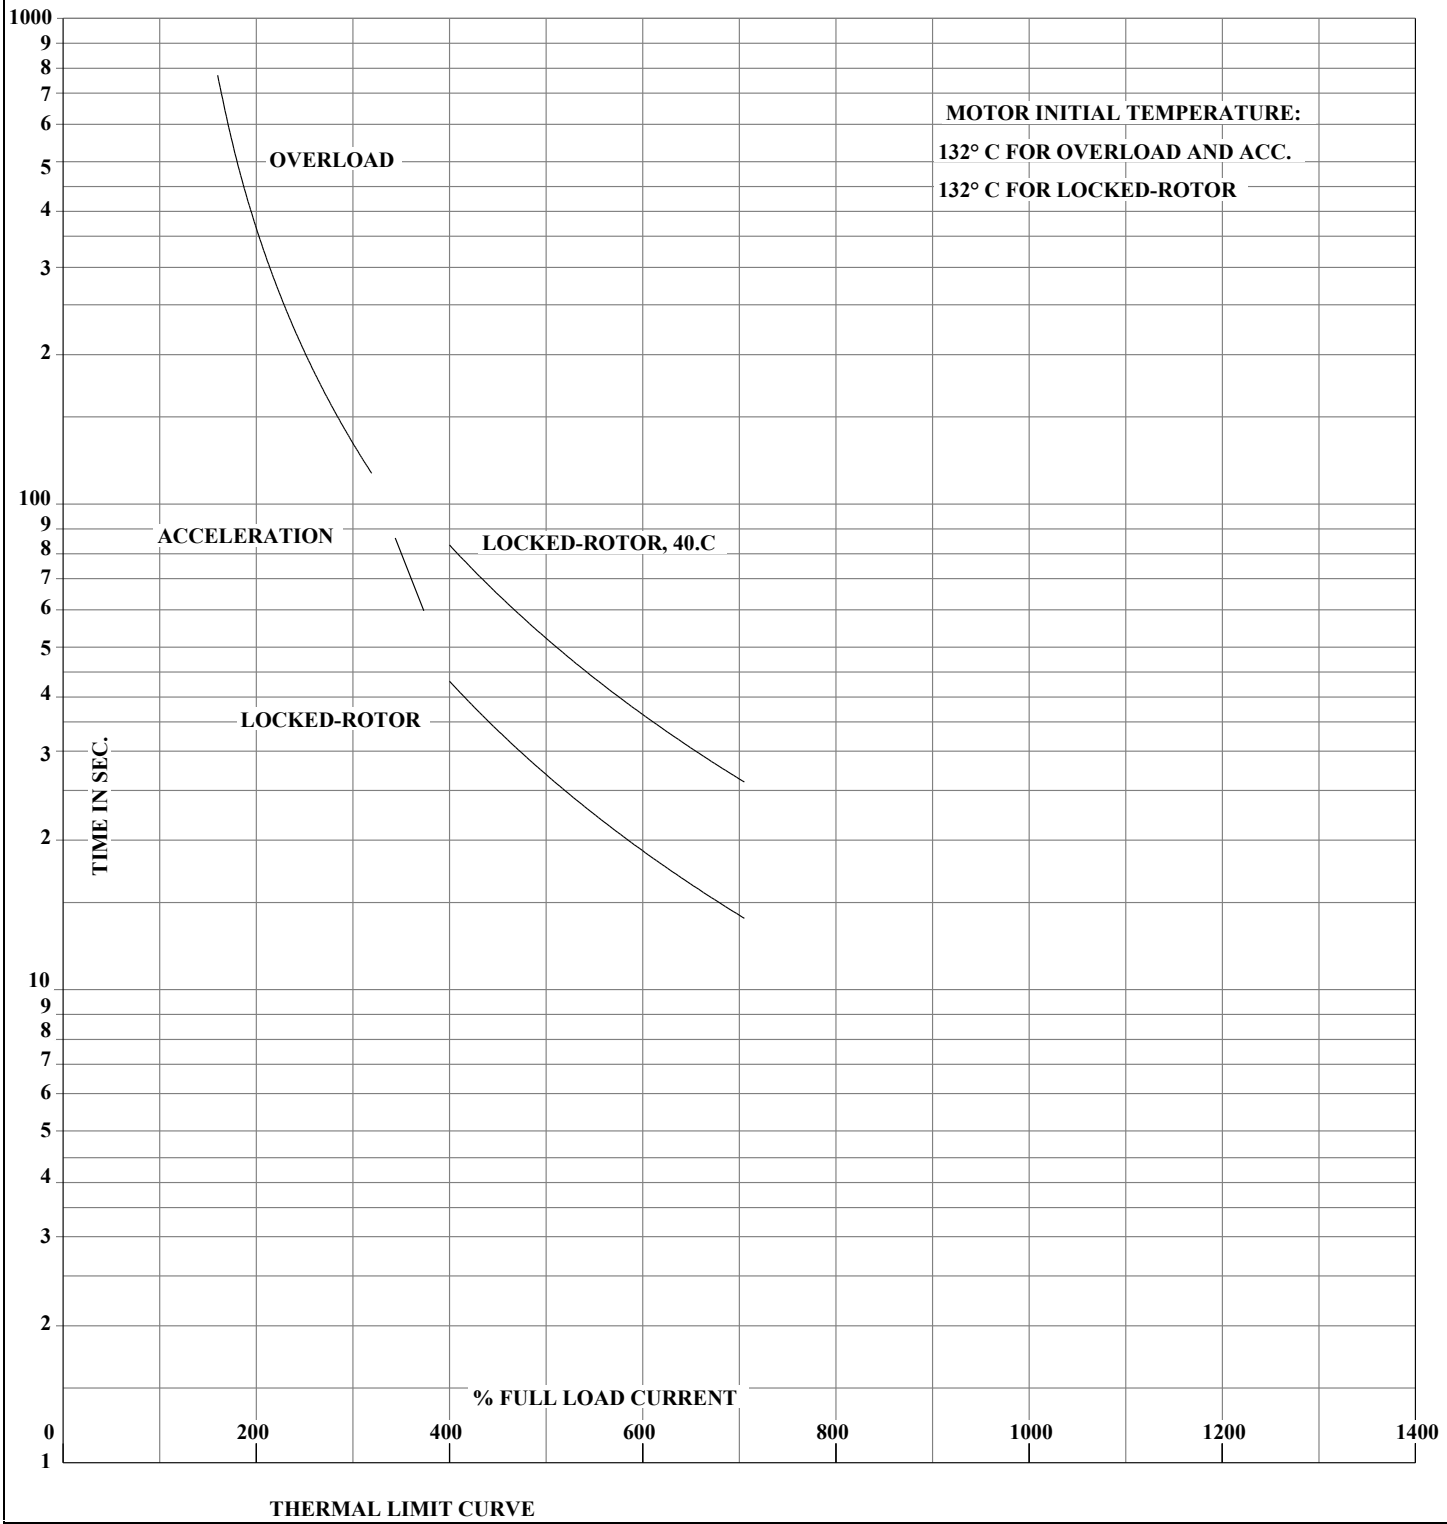

THERMAL LIMIT CURVE

AMPERES SHOWN FOR 230/460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR A MEMBER OF THE ABB GROUP	DRAWN BY: J.J.HARRISON CHECKED BY: G. R. WEBB APPROVED BY: W.L.SMITH DATE: 10/16/02	AC MOTOR PERFORMANCE DATA	A36WG0107-R001 ISSUE DATE 12/14/10

617428-036

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION
CAST IRON CONSTRUCTION

ENCLOSURE: TOTALLY ENCLOSED
MOUNTING: FOOT

FRAMES 364TS-365TS

COOLING: FAN COOLED

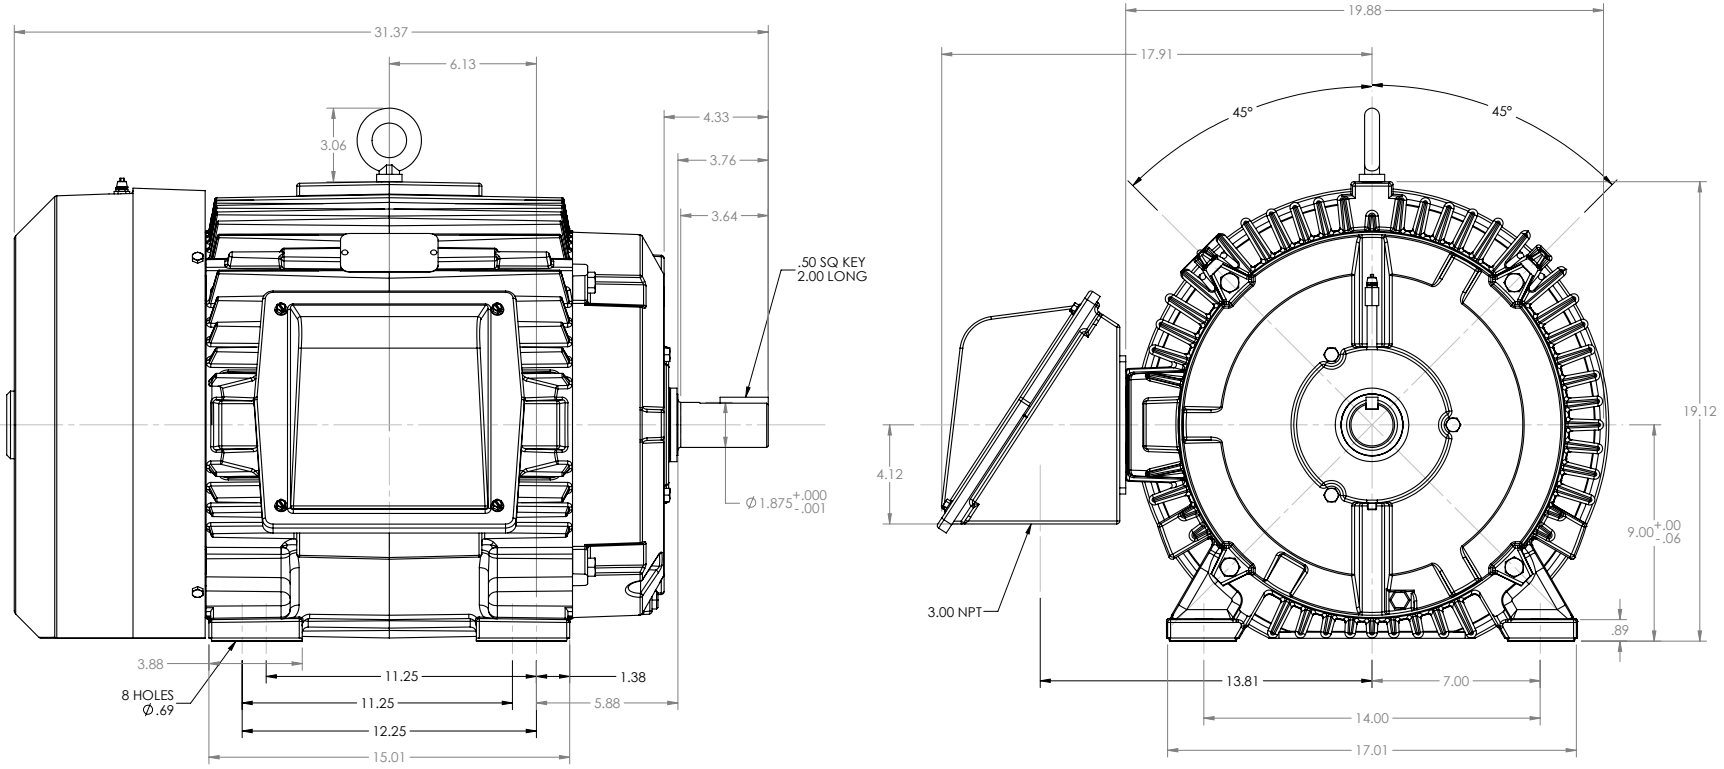

MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF STD. SHAFT EXTENSION IS .002 T.I.R. UP TO AND INCLUDING 1.625 DIA. AND .003 T.I.R. 1.625 DIA. TO 5 INCH DIA.

WEIGHT (LBS): 364TS = 859
365TS = 884

MOTOR WEIGHTS MAY VARY BY 15% DEPENDING UPON RATING.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: UPDATING SHAFT AND CORRECTING BA DIMENSION			
REV: A	VERSION: 01	REVISED: 11:06:08 03/28/2014	TDR: 000000846122
MODEL NO. 617428-036			REF:
BY: RAGJSS1			B

BALDOR

DIM SHEET HOR 364-5TS TEFC XT

617428-036

416820–002

A–C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA–CONNECTED

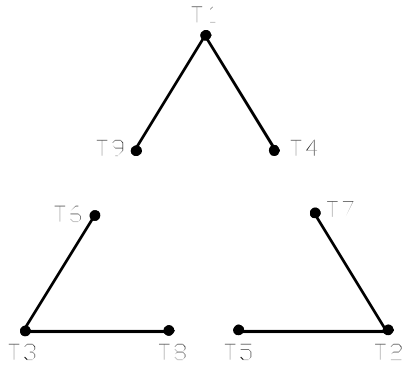

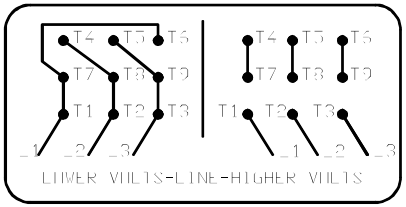

(N. P. 1575-B)

416820–002

REV. DESC: FONT CHANGE FOR PDF SEARCHABLE		
REV. LTR: A	VERSION: 01	TDR: 000001009382
FILE: \MGA\00000\661	REVISED: 02:46:19 02/13/2020	BY: MGHMTT
MTL: –		

BALDOR - RELIANCE®

CONN DIAG – STANDARD 9 LEAD, DELTA–CONNECTED

SH 1 of 1