

**BALDOR • RELIANCE**

---

# Customer information packet

## EHF3218T-8

5HP, 1750RPM, 3PH, 60HZ, 184T, 3632M, OPSB, F2

Class - None

Division - Not Applicable

## Specifications

Enclosure	OPSB
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	15.000 A @ 200.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	15.0 a
Insulation Class	F
Inverter Code	Inverter Ready

## Part detail

Revision	G
Type	AC
Mech. spec.	36L731
Base	
Status	PRD/A
Elec. spec.	36WGT159
Layout	36LYL731
Eff. date	01-15-2025
CD Diagram	CD0006
Poles	04
Leads	3#14
Proprietary	False
Created date	02-17-2010

<b>KVA Code</b>	K
<b>Lifting Lugs</b>	Standard Lifting Lugs
<b>Locked Bearing Indicator</b>	No Locked Bearing
<b>Motor Lead Exit</b>	Ko Box
<b>Motor Lead Quantity/Wire Size</b>	3 @ 14 AWG
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	3632M
<b>Mounting Arrangement</b>	F2
<b>Number of Poles</b>	4
<b>Overall Length</b>	15.00 IN
<b>Power Factor</b>	80
<b>Product Family</b>	General Purpose
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	Standard
<b>Pulley Shaft Indicator</b>	Standard
<b>Rodent Screen</b>	None
<b>Service Factor</b>	1.15
<b>Shaft Diameter</b>	1.125 IN
<b>Shaft Extension Location</b>	Pulley End
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	No Slinger
<b>Speed</b>	1750 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	None
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

**Nameplate**

<b>NP2094E06B03</b>									
<b>CAT.NO.</b>	EHFM3218T-8								
<b>SPEC.</b>	36L731T159G1								
<b>HP</b>	5								
<b>VOLTS</b>	200								
<b>AMPS</b>	15								
<b>RPM</b>	1750								
<b>FRAME</b>	184T		<b>HZ</b>	60		<b>PH</b>	3		
<b>SER.F.</b>	1.15	<b>CODE</b>	K	<b>DES</b>	B	<b>CL</b>	F		
<b>NEMA-NOM-EFF</b>	89.5	<b>PF</b>	80						
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>	010A		<b>USABLE AT 208V</b>			N/A			
<b>DE</b>	6206	<b>ODE</b>	6205						
<b>AUTO</b>	N	<b>MANUAL</b>	N	<b>NONE</b>	Y				
<b>ENCL</b>	OPSB	<b>SN</b>							
<b>BLANK</b>	SFA 16.9								

**AC Induction Motor Performance Data**

Record # 10604

Typical performance - not guaranteed values

<b>Winding:</b> 36WGT159-R001		<b>Type:</b> 3632M		<b>Enclosure:</b> OPSB	
<b>Nameplate Data</b>			<b>200 V, 60 Hz: Single Voltage Motor</b>		
<b>Rated Output (HP)</b>	5	<b>Full Load Torque</b>	15 LB-FT		
<b>Volts</b>	200	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	15	<b>Breakdown Torque</b>	51 LB-FT		
<b>R.P.M.</b>	1750	<b>Pull-up Torque</b>	30 LB-FT		
<b>Hz</b>	60	<b>Locked-rotor Torque</b>	37 LB-FT		
<b>NEMA Design Code</b>	B	<b>Starting Current</b>	115 A		
<b>Service Factor (S.F.)</b>	1.15	<b>No-load Current</b>	7.5 A		
<b>NEMA Nom. Eff.</b>	89.5	<b>Line-line Res. @ 25°C</b>	0.568 Ω		
<b>Rating - Duty</b>	40C AMB-CONT	<b>Temp. Rise @ Rated Load</b>	41°C		
<b>S.F. Amps</b>		<b>Temp. Rise @ S.F. Load</b>	51°C		
		<b>Locked-rotor Power Factor</b>	57		
		<b>Rotor inertia</b>	0.297 LB-FT <sup>2</sup>		

**Load Characteristics 200 V, 60 Hz, 5 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	38	60	73	80	83	86	0
<b>Efficiency</b>	88	91.3	91.6	90.7	89.5	88	0
<b>Speed</b>	1788	1777	1767	1754	1740	1726	0
<b>Line amperes</b>	8.3	10.1	12.1	15	18.1	21.6	16.7


ABB Motors and Mechanical Inc.

WINDING # 36WGT159


Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 1750 RPM 200 V 3632M


TORQUES (LB-FT): PO=51 PU=30 LR=37 LRA=115

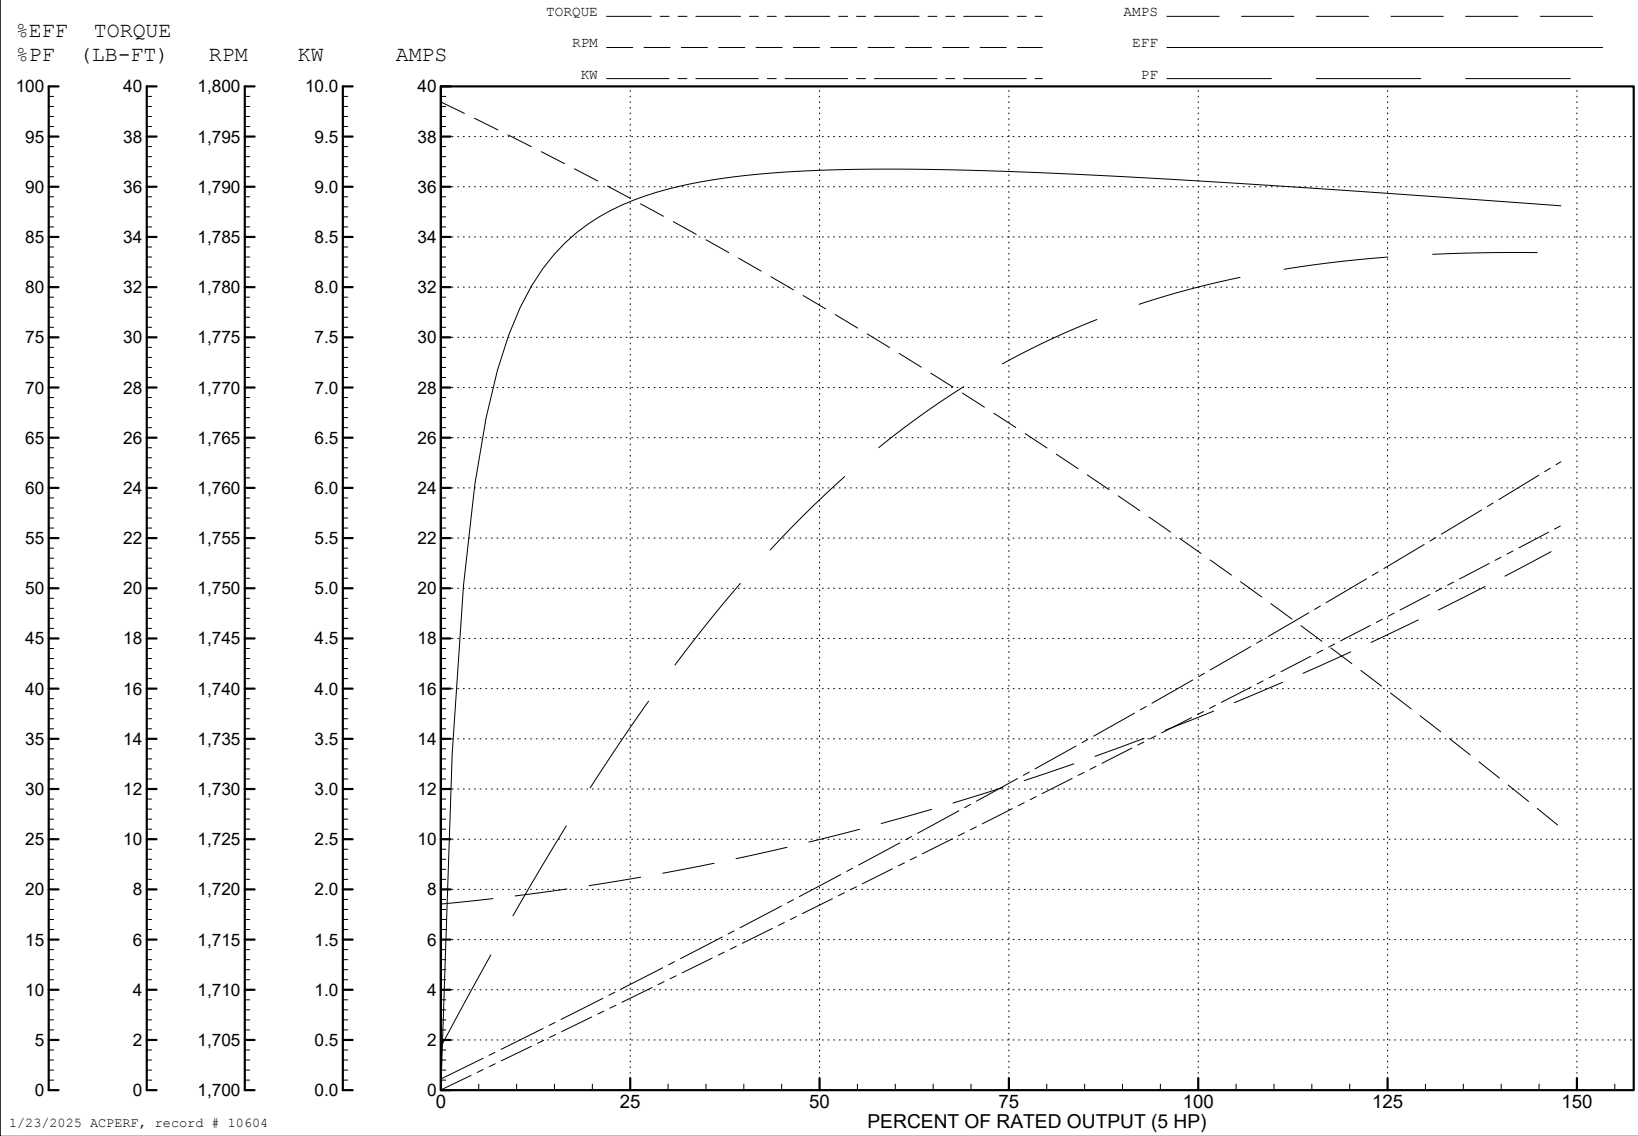

1/23/2025 ACPERF, record # 10604

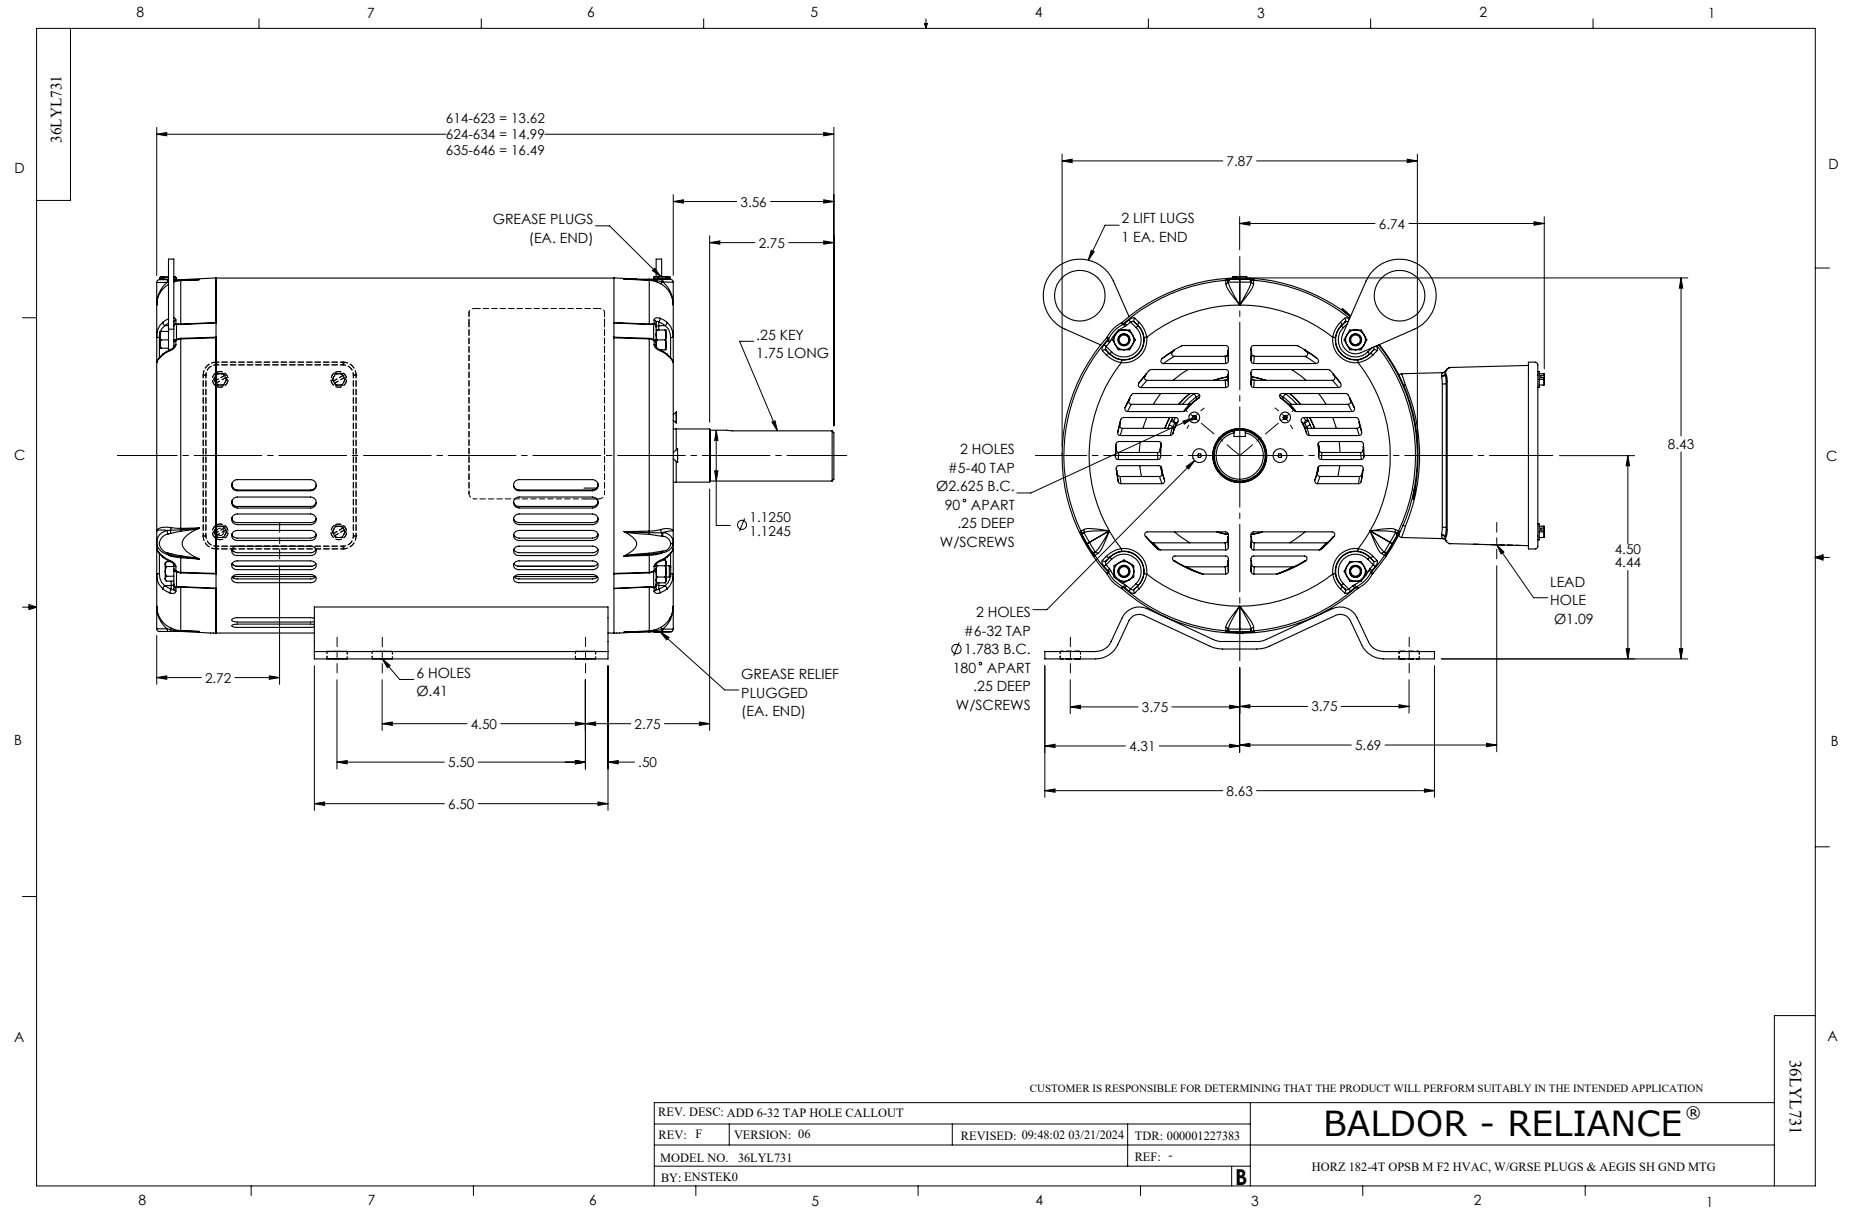

CD0006

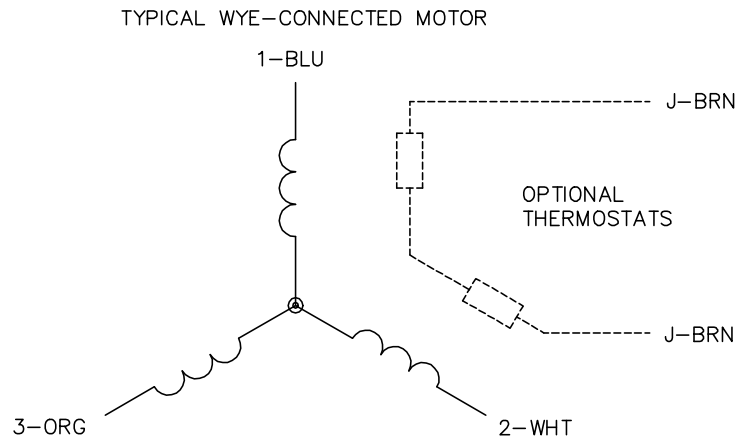

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIRO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1