ABB BALDOR RELIANCE

Customer information packet

EM2506T-BG

7.5HP, 1180RPM, 3PH, 60HZ, 254T, 3950M, OPSB, F
Class -
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/23/2026 3:58:19 AM

Specifications

Enclosure	OPSB
Frame	254T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	230.0 V @ 60 HZ
Agency Approvals	CSA EEV
	UR
	CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	11.000 A @ 460.0 V
	22.400 A @ 230.0 V
	23.000 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	T
Type	AC
Mech. spec.	39E531
Base	
Status	PRD/A
Elec. spec.	M-39WG-X747
Layout	39LYE531
Eff. date	11-29-2023
CD Diagram	CD0180
Poles	06
Leads	9#12,0#0,0#0
Proprietary	False
Created date	10-07-2013

High Voltage Full Load Amps	11.0 a
Insulation Class	H
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3950M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	23.19 IN
Power Factor	70
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Extension Location	Pulley End
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1259LUA									
CAT.NO.	EM2506T-BG								
SPEC.	39E531X747G1								
HP	7.5								
VOLTS	230/460								
AMPS	22.8/11.4								
R.P.M.	1180								
FRAME	254T	**HZ**	60			**PH**	3		
SER.F.	1.15	**CODE**	K	**DES**	A	**CLASS**	H		
NEMA NOM. EFF.	90.2	**P.F.**	68						
RATING	40C AMB-CONT								
CC	010A								
DE	6309	**ODE**	6208						
ENCL	OPSB	**SN**							
USABLE AT	50HZ 7.5HP 190/380V 26.4/13.2A								SF1.0

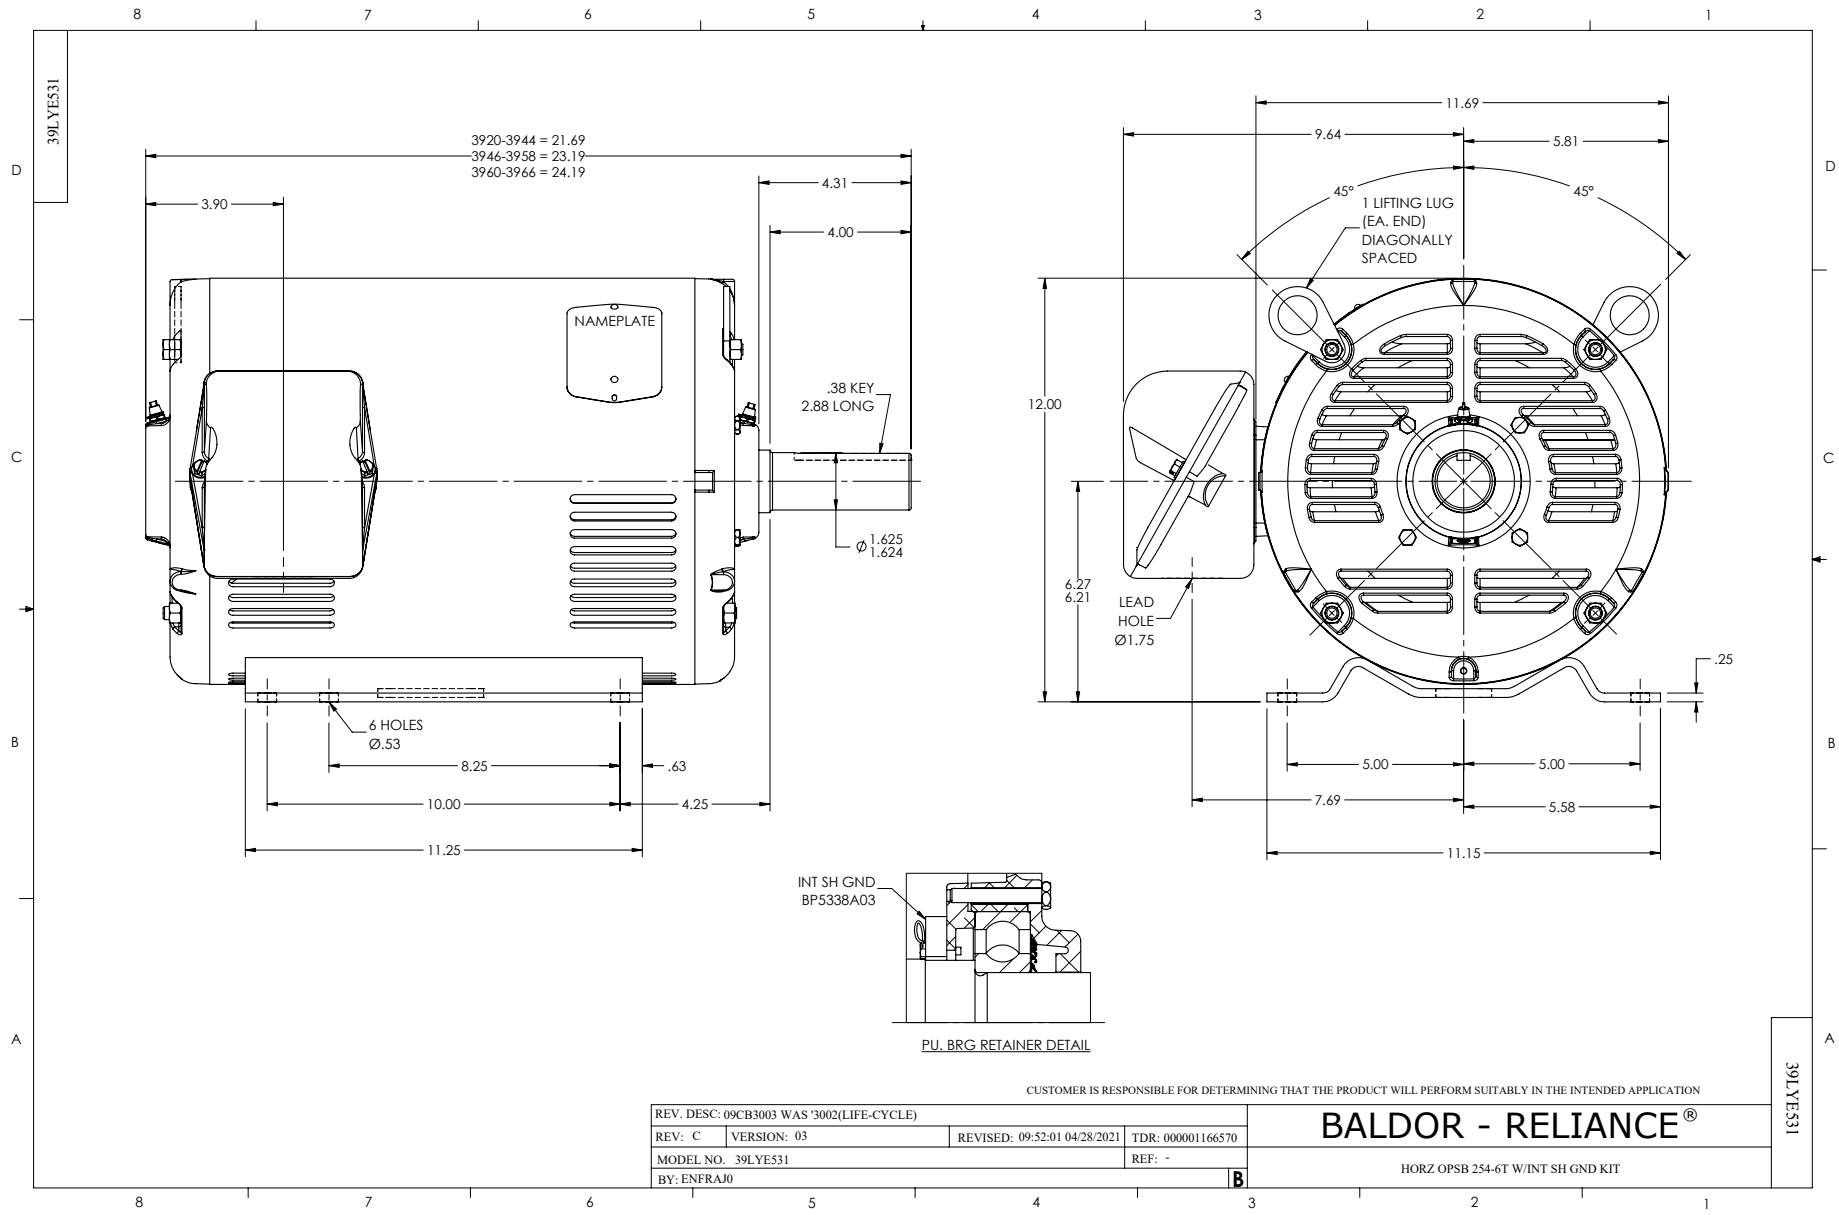
39LYE531
3920-3944 = 21.69
3946-3958 = 23.19
3960-3966 = 24.19
3.90
4.31
4.00
NAMEPLATE
.38 KEY
2.88 LONG
Ø 1.625
1.624
6 HOLES
Ø.53
8.25
.63
10.00
4.25
11.25
11.69
9.64
5.81
45°
45°
1 LIFTING LUG
(EA. END)
DIAGONALLY
SPACED
12.00
6.27
6.21
LEAD
HOLE
Ø1.75
.25
5.00
5.00
7.69
5.58
11.15
INT SH GND
BP5338A03
PU. BRG RETAINER DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: 09CB3003 WAS '3002(LIFE-CYCLE)
REV: C
VERSION: 03
REVISED: 09:52:01 04/28/2021
TDR: 000001166570
MODEL NO. 39LYE531
REF: -
BY: ENFRAJ0
B
BALDOR - RELIANCE®
HORZ OPSB 254-6T W/INT SH GND KIT
39LYE531

CD0180

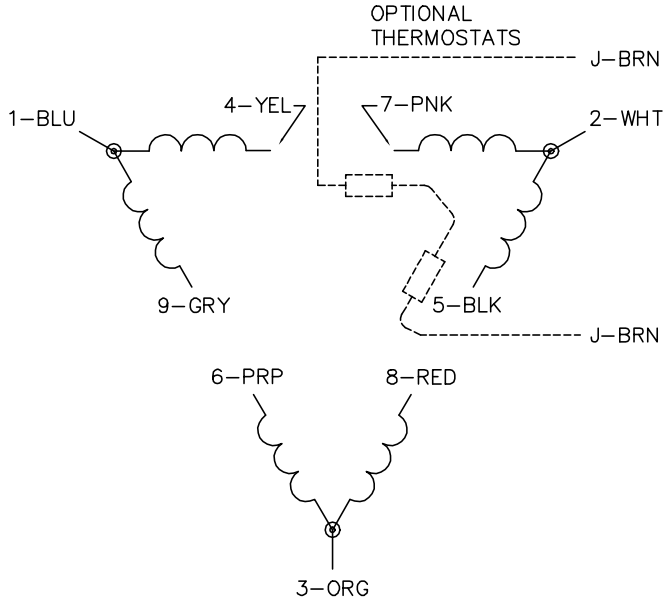

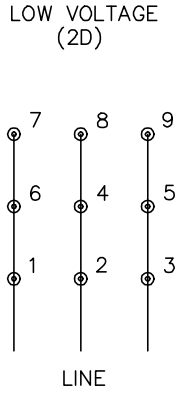

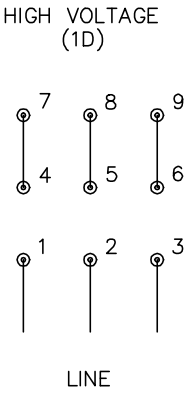

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10:25:29 02/19/2019	BY: ENBRIR0
MTL: –		

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1