ABB BALDOR RELIANCE

Customer information packet

EM4106T-G

20HP, 3520RPM, 3PH, 60HZ, 256T, 0936M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/23/2026 8:14:09 PM

Specifications

Enclosure	TEFC
Frame	256T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	20.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	230.0 V @ 60 HZ
Agency Approvals	CSA
	CSA EEV
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	46.000 A @ 230.0 V
	50.000 A @ 208.0 V
	23.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	AV
Type	AC
Mech. spec.	09J359
Base	
Status	PRD/A
Elec. spec.	09WGZ601
Layout	09LYJ359
Eff. date	08-20-2026
CD Diagram	CD0005
Poles	02
Leads	9#10
Proprietary	False
Created date	11-29-2011

Heater Indicator	No Heater
High Voltage Full Load Amps	23.0 a
Insulation Class	H
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0936M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	23.30 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3520 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None

Nameplate

NP3441LUA									
CAT.NO.	EM4106T-G								
SPEC	09J359Z601G1								
HP	20								
VOLTS	230/460								
AMPS	46/23								
RPM	3520								
FRAME	256T	**HZ**	60			**PH**	3		
SF	1.15	**CODE**	H	**DES**	A	**CLASS**	H		
NEMA NOM. EFF	91	**PF**	89						
RATING	40C AMB-CONT								
CC	010A								
ENCL	TEFC	**SER**							
DE	6309	**ODE**	6208						
VPWM INVERTER READY	SFA 43/26.5								
CT6-60H(10:1)VT3-60H(20:1									
	50HZ 20HP 190/380V 56/28A								SF1.0

AC Induction Motor Performance Data
Record # 36290
Typical performance - not guaranteed values

Winding: 09WGZ601-R024	**Type:** 0936M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			20	**Full Load Torque**	29.6 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			46/23	**Breakdown Torque**	111 LB-FT
R.P.M.			3520	**Pull-up Torque**	39.1 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	49.6 LB-FT
NEMA Design Code	B	**KVA Code**	H	**Starting Current**	161 A
Service Factor (S.F.)			1.15	**No-load Current**	7.17 A
NEMA Nom. Eff.	91	**Power Factor**	89	**Line-line Res. @ 25ºC**	0.47592 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	76°C
S.F. Amps				**Temp. Rise @ S.F. Load**	95°C
				Locked-rotor Power Factor	29
				Rotor inertia	0.92 LB-FT2

Load Characteristics 460 V, 60 Hz, 20 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	58	78	86	89	90	90	90
Efficiency	88.9	92.2	92.4	91.7	90.7	89.2	91.1
Speed	3579.6	3561.5	3541.3	3519.5	3495.4	3467.8	3505
Line amperes	9	13	17.7	22.9	28.6	35	26.3

ABB Motors and Mechanical Inc.

WINDING # 09WGZ601

20 HP 3 PH 60 HZ 3520 RPM 460 V 0936M

Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=111 PU=39.1 LR=49.6 LRA=161

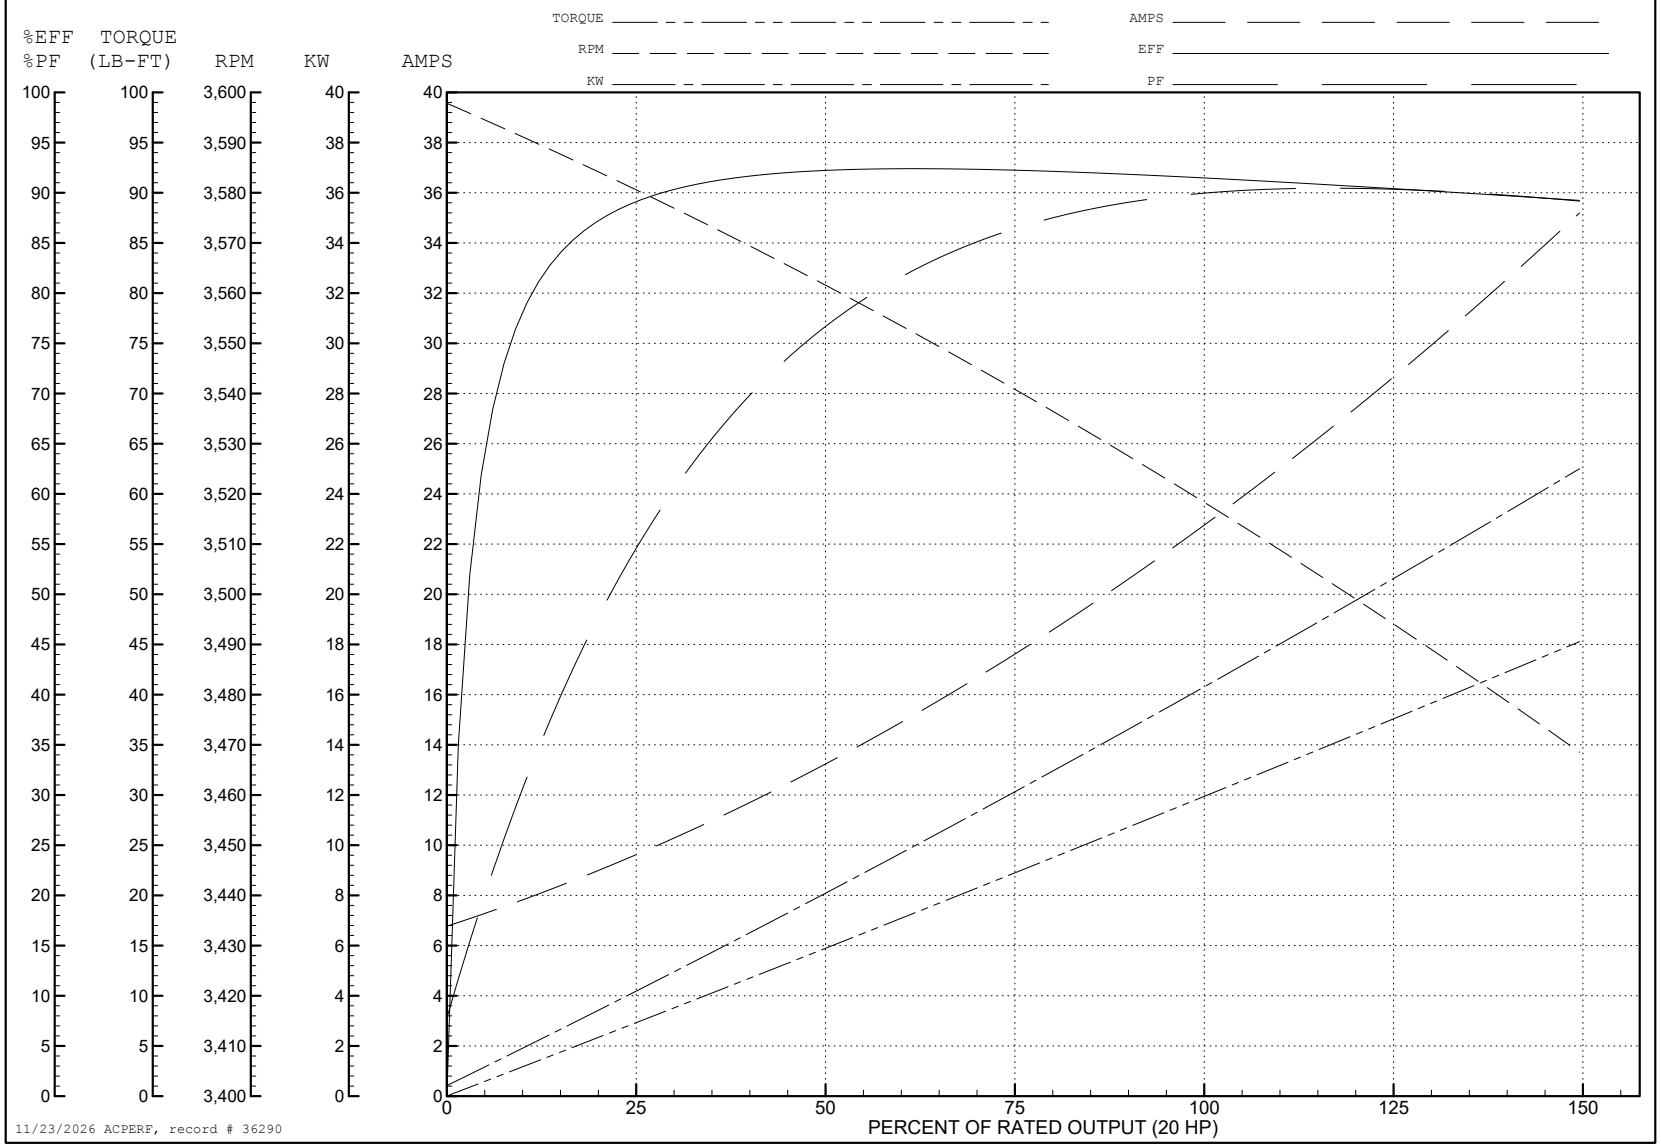

11/23/2026 ACPERF, record # 36290

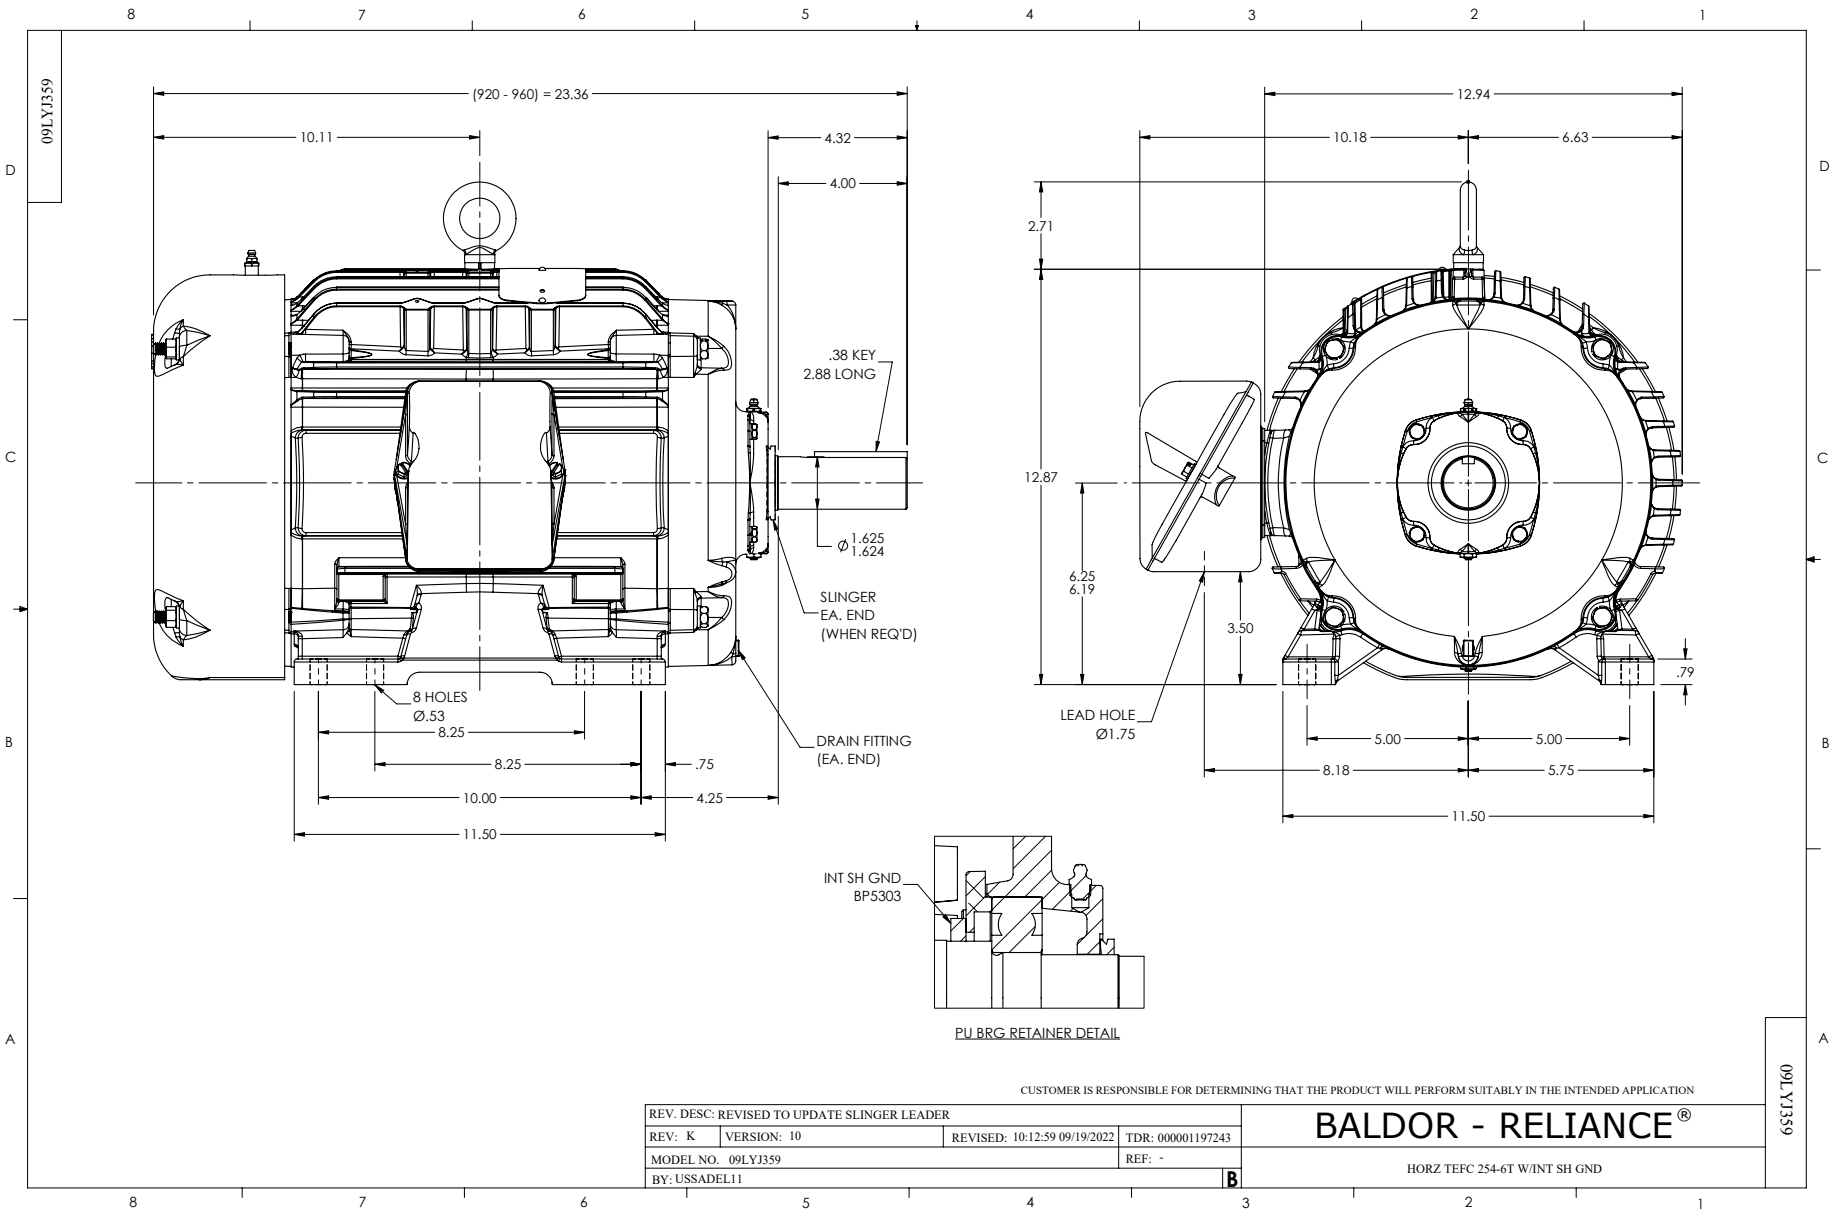
09LYJ359
(920 - 960) = 23.36
10.11
4.32
4.00
.38 KEY
2.88 LONG
Ø 1.625
1.624
SLINGER
EA. END
(WHEN REQ'D)
8 HOLES
Ø.53
8.25
8.25
.75
10.00
4.25
11.50
DRAIN FITTING
(EA. END)
12.94
10.18
6.63
2.71
12.87
6.25
6.19
3.50
.79
LEAD HOLE
Ø1.75
5.00
5.00
8.18
5.75
11.50
INT SH GND
BP5303
PU BRG RETAINER DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: REVISED TO UPDATE SLINGER LEADER
REV: K
VERSION: 10
REVISED: 10:12:59 09/19/2022
TDR: 000001197243
MODEL NO. 09LYJ359
REF: -
BY: USSADEL11
B
BALDOR - RELIANCE®
HORZ TEFC 254-6T W/INT SH GND
09LYJ359

CD0005

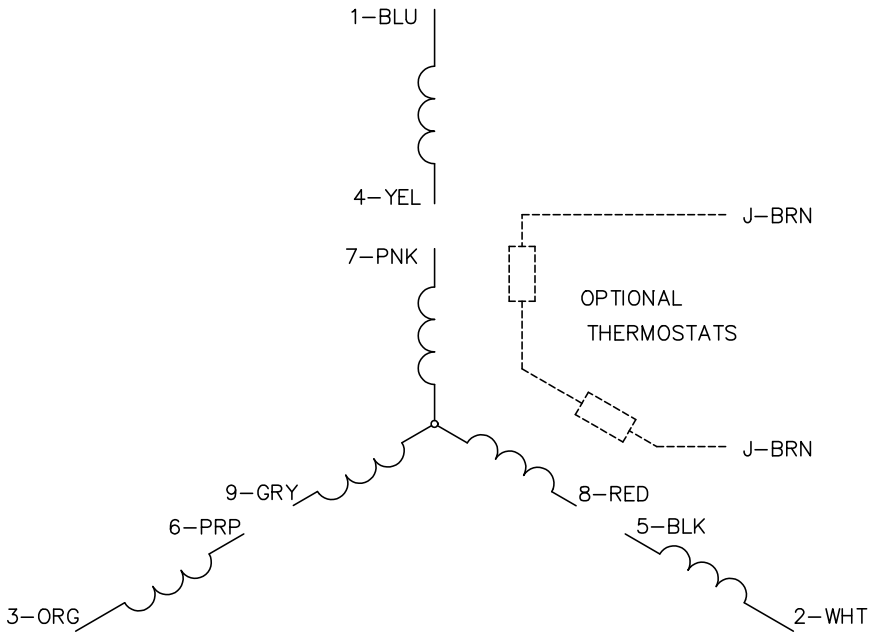

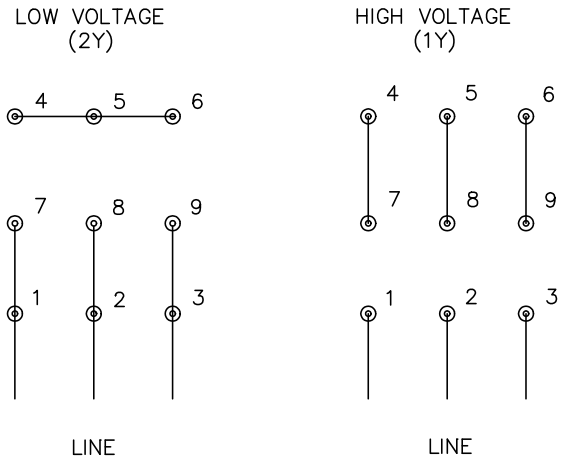

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS