ABB BALDOR RELIANCE

Customer information packet

EM44156T-4

150HP, 1190RPM, 3PH, 60HZ, 447T, A44120M, TEFC
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
9/7/2026 10:16:57 AM

Specifications

Enclosure	TEFC
Frame	447T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	150.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CURUSEEV
	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	170.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.8 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	170.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	F
Lifting Lugs	No Lifting Lugs
Motor Lead Quantity/Wire Size	6 @ 2 AWG
Motor Standards	NEMA
Motor Type	A44120M

Part Detail

Revision	N
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG1555
Layout	617427-002
Eff. date	09-04-2024
CD Diagram	416820-008
Poles	06
Leads	6#2
Proprietary	False
Created date	08-14-2012

Mounting Arrangement	F1
Number of Poles	6
Overall Length	48.24 IN
Power Factor	86
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1190 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP2349L												
SPEC NO.	P44G3910		**CAT.NO.**	EM44156T-4						**FRAME**	447T	
HP	150	**VOLTS**	460	**PHASE**	3	**DESIGN**	B	**TYPE**	P			
RPM	1190	**AMPS**	170	**HZ**	60	**AMB**	40	**SF**	1.15			
DRIVE END BEARING	90BC03J30X		**DUTY**	CONT		**INSUL.CLASS**	F					
OPP D.E. BEARING	90BC03J30X		**ENCL**	TEFC	**CODE**	F						
SER.NO.			**POWER FACTOR**	86						**NEMA-NOM-EFFICIENCY**	95.8	
						MAX CORR KVAR	25.0			**GUARANTEED EFFICIENCY**	95.0	
								NEMA NOM/CSA QUOTED EFF				
										MOTOR WEIGHT		

Accessories

Part number	Description	Multiplier
089490110A	D-FLANGE BRKT, G28 089490109WCA	P1
089490106A	G28 C-FACE BRKT MACH-6318 089490105WCA	P1

S/O	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	447T	150	P	3/60	1190	460

AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
172	CONT	40/F	1.15	B	G	TEFC

E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)
833174	418143080ME	---	---	.0324

PERFORMANCE

LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY
NO LOAD	0	46.5	1200	3.43	0
1/4	37.6	70.2	1197	52.9	94.8
2/4	75.1	99.7	1194	73.3	96.2
3/4	112	135	1191	81.3	96.2
4/4	150	172	1188	85.2	95.8
5/4	188	212	1184	87.2	95.1

SPEED TORQUE

	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES
LOCKED ROTOR	0	124	819	1037
PULL UP	180	99.7	660	1014
BREAKDOWN	1149	238	1579	599
FULL LOAD	1188	100	663	172

AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

CALCULATED DATA
NEMA NOMINAL EFFICIENCY = 95.8 PCT.

ABB	DRAWN BY: T.G.KELATI CHECKED BY: J.J.HARRISON APPROVED BY: T.G.KELATI DATE: 06/14/2011	AC MOTOR PERFORMANCE DATA	A44WG1555-R001 DATE ISSUED 06/14/20

FRAME 447T	RPM 1190	S.F. 1.15	ROTOR 418143080ME
HP 150	VOLTS 460	NEMA DESIGN B	TEST S.O. CALCULATED DATA
TYPE P	AMPS 172	CODE LETTER G	TEST DATE ---
PHASE / HERTZ 3/60	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25°C .0324
	AMB °C / INSUL 40/F	E/S 833174	OHMS (BETWEEN LINES)

NEMA NOMINAL EFFICIENCY = 95.8 PCT.

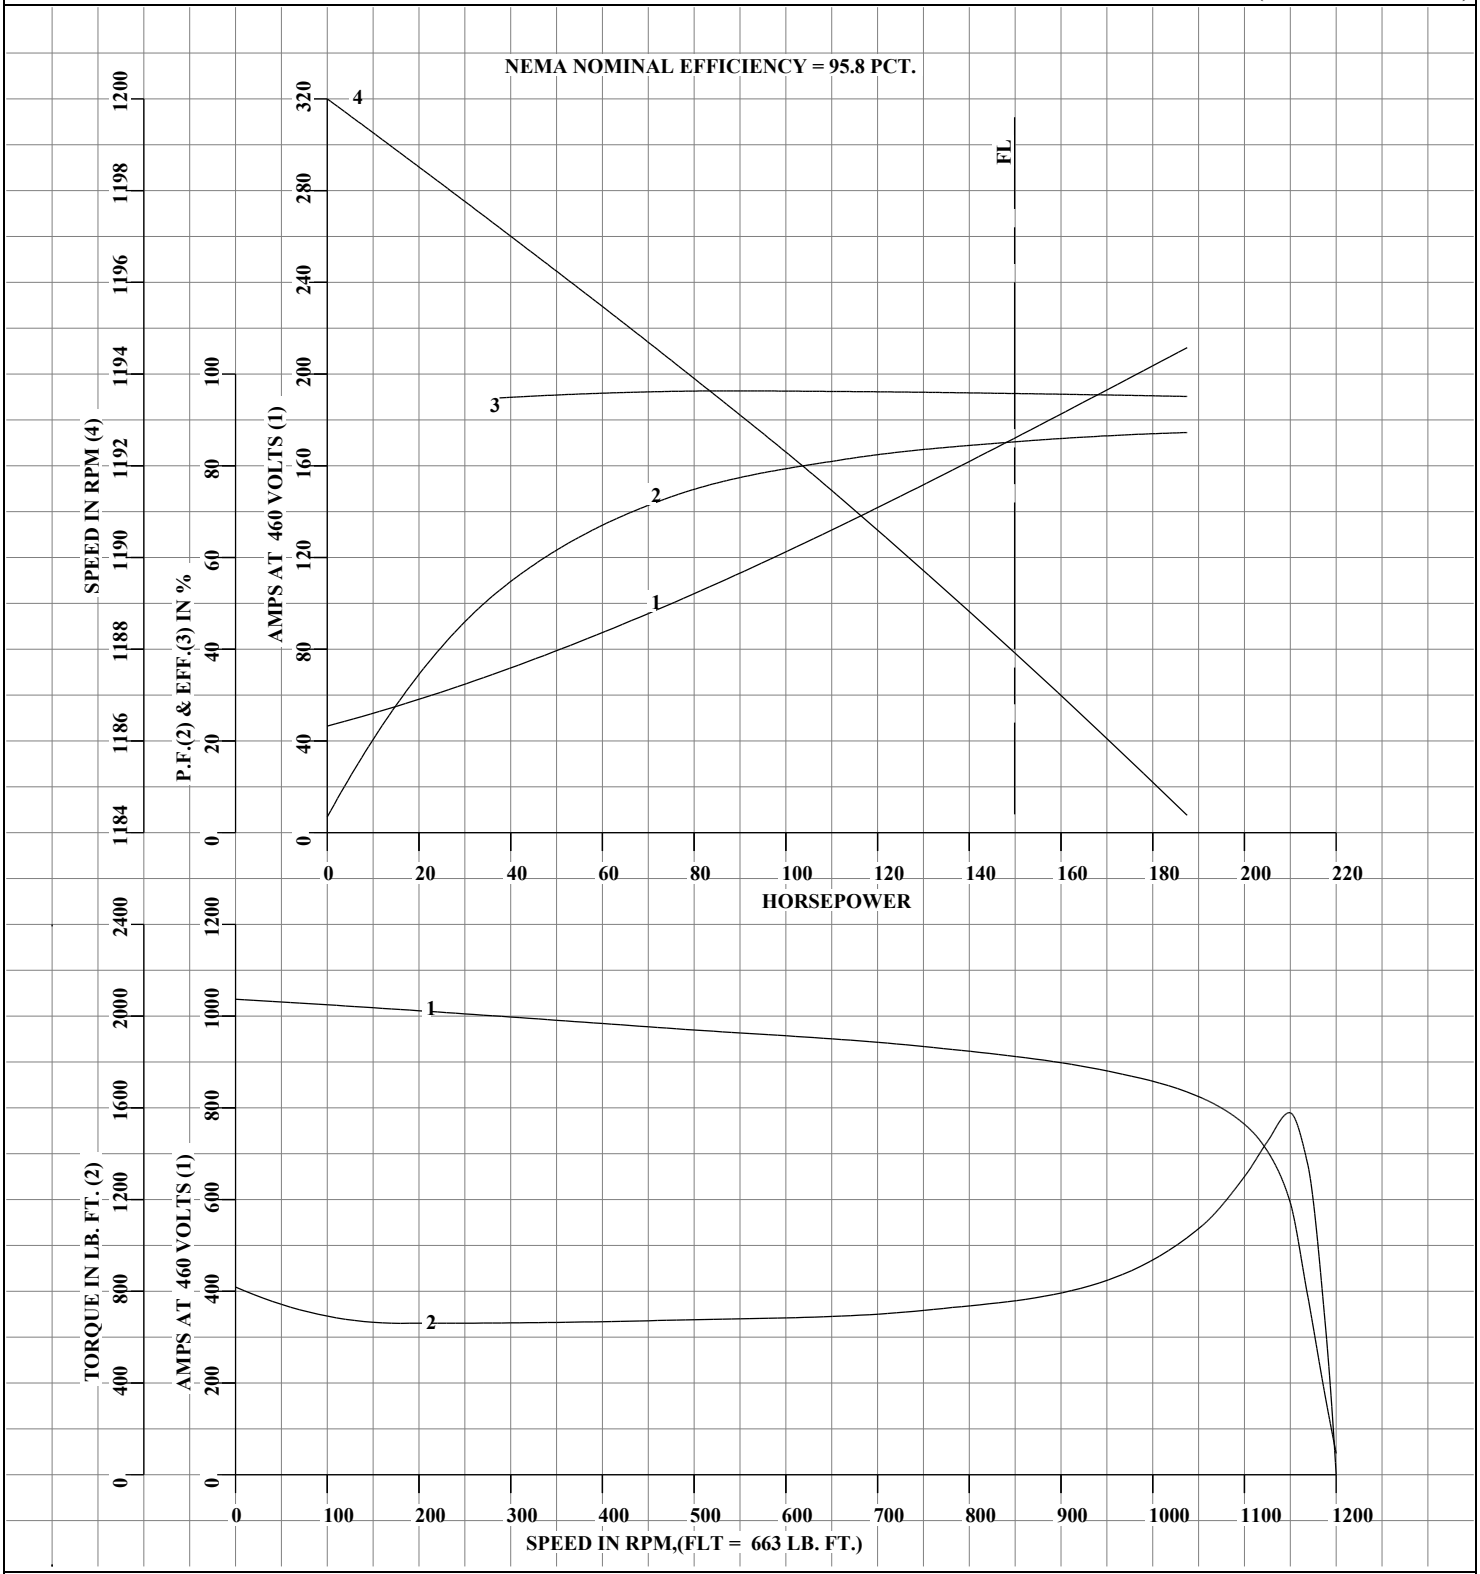

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

ABB	DRAWN BY: T.G.KELATI CHECKED BY: J.J.HARRISON APPROVED BY: T.G.KELATI DATE: 06/14/2011	AC MOTOR PERFORMANCE DATA	A44WG1555-R001 ISSUE DATE 06/14/2011

617427-002

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION

ENCLOSURE: TOTALLY ENCLOSED

FRAME G447T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 445T FRAME MOUNTING HOLES

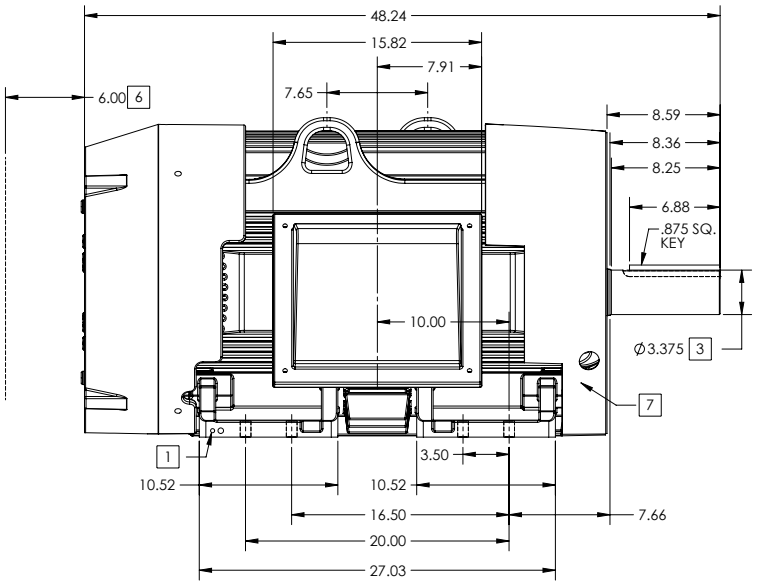

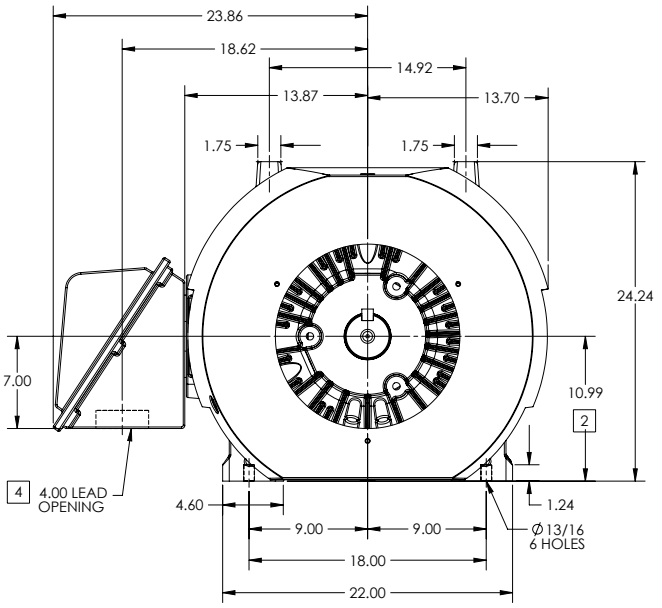

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES +.00,-.06
3. VARIES +.000,-.001
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NO ENCROACH ON AIR INLET.
7. AIR DEFLECTOR INSTALLED WHEN REQUIRED.

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF STANDARD SHAFT EXTENSION IS .003" T.I.R. TO 5 INCH DIA.

5 WEIGHT (LBS): 2515

DRIVE END AIR DEFLECTOR IS ONLY INCLUDED WHEN NECESSARY.

DIMENSIONS ARE IN INCHES; SEE SHEET 2 FOR DIMENSIONS IN MILLIMETERS

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

SHEET NUMBER 1 OF 2

617427-002

REV. DESC: CHANGING ENCLOSURE TO "TOTALLY ENCLOSED"WAS"UL..."			
REV: A	VERSION: 01	REVISED: 08:25:13 02/15/2013	TDR: 000000786306
MODEL NO. 617427-002			REF:
BY: MGHWCG	Material:	C	

BALDOR

G447T/445T STD – FOOTED – SIDE/CENTER C/B

617427-002

617427-002

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION

ENCLOSURE: TOTALLY ENCLOSED

FRAME G447T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 445T FRAME MOUNTING HOLES

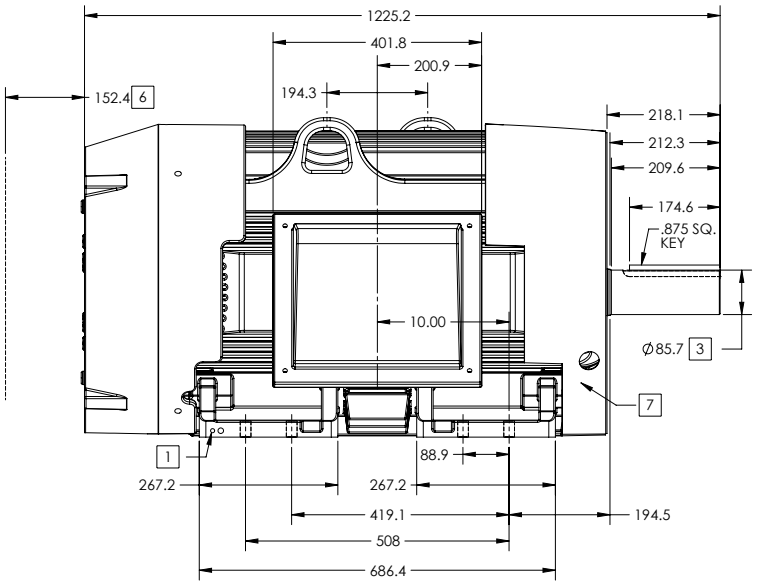

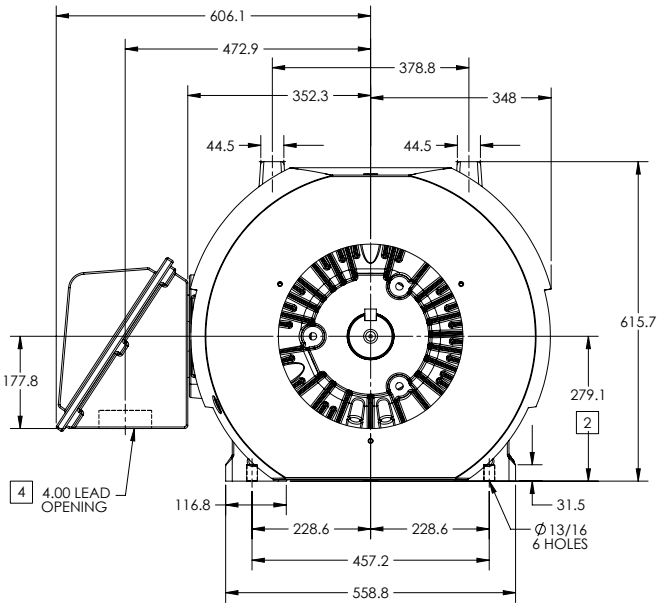

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES +.00,-.06
3. VARIES +.000,-.001
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NO ENCROACH ON AIR INLET.
7. AIR DEFLECTOR INSTALLED WHEN REQUIRED.

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF STANDARD SHAFT EXTENSION IS .08 MM T.I.R. TO 127 MM DIA.

5 WEIGHT (KGS): 1140

DRIVE END AIR DEFLECTOR IS ONLY INCLUDED WHEN NECESSARY.

DIMENSIONS ARE IN MILLIMETERS; SEE SHEET 1 FOR DIMENSIONS IN INCHES

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

REV. DESC: CHANGING ENCLOSURE TO "TOTALLY ENCLOSED"WAS"UL..."			
REV: A	VERSION: 01	REVISED: 08:25:13 02/15/2013	TDR: 000000786306
MODEL NO. 617427-002			REF:
BY: MGHWCG	Material:		C

BALDOR

G447T/445T STD – FOOTED – SIDE/CENTER C/B

617427-002

617427-002

416820-008

A-C MOTOR
CONNECTION DIAGRAM

STANDARD 6 LEAD Y START - DELTA RUN

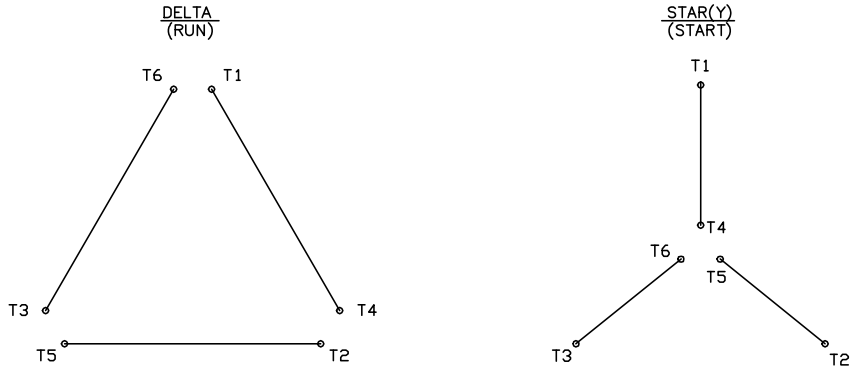

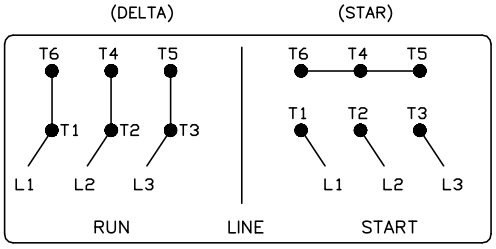

(N. P. 1767-DC)

REV. DESC: ADDED T4 TO Y CONNECT DIAGRAM		
REV. LTR: D	VERSION: 04	TDR: 000000847713
FILE: \RAG\00001\808	REVISED: 10:41:26 04/08/2014	BY: RAGJSS1
MTL: -		

BALDOR

CONNECT DIAGRAM STD 6 LEAD Y START DELTA RUN

SH 1 of 1

416820-008