



Customer information packet

HIC264A

.33HP, 1625RPM, 1PH, 60HZ, 48Z, 3414C, TEAO, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEAO
Frame	48Z
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Oil Capacitor Start and Run
Output @ Frequency	.330 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.900 A @ 230.0 V 3.800 A @ 115.0 V
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	64.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Terminal Panel
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.9 a
Insulation Class	F

Part detail

Revision	K
Type	AC
Mech. spec.	34M259
Base	
Status	PRD/A
Elec. spec.	34WGR070
Layout	34LYM259
Eff. date	09-18-2023
CD Diagram	CD0804A01
Poles	04
Leads	9#18
Proprietary	False
Created date	06-04-2013

Inverter Code	Not Inverter
KVA Code	C
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Terminal Panel Or Lead Hole
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	None
Motor Standards	NEMA
Motor Type	3414C
Mounting Arrangement	F1
Number of Poles	4
Overall Length	10.09 IN
Power Factor	90
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Multiple Flats
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	0.500 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible: Connected Standard
Shaft Slinger Indicator	Shaft Slinger
Speed	1625 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	WG
Winding Thermal 2	None

Nameplate

NP1257L									
CAT.NO.	HIC264A								
SPEC.	34M259R070G1								
HP	.33								
VOLTS	115/230								
AMP	3.8/1.9								
RPM	1625								
FRAME	48Z			HZ	60		PH	1	
SER.F.	1.00	CODE	C	DES	-	CL	F		
NEMA-NOM-EFF	64	PF	90						
RATING	40C AMB-CONT								
CC									
DE	6203	ODE	6203						
ENCL	TEAO	SN							

AC Induction Motor Performance Data

Record # 42889

Typical performance - not guaranteed values

Winding: 34WGR070-R001		Type: 3414C		Enclosure: TEAO	
Nameplate Data			230 V, 60 Hz: High Voltage Connection		
Rated Output (HP)	.33 AIR OVER		Full Load Torque	1.06 LB-FT	
Volts	115/230		Start Configuration	direct on line	
Full Load Amps	3.8/1.9		Breakdown Torque	2.17 LB-FT	
R.P.M.	1625		Pull-up Torque	0.709 LB-FT	
Hz	60	Phase	1	Locked-rotor Torque	0.779 LB-FT
NEMA Design Code	- KVA Code		C	Starting Current	5.37 A
Service Factor (S.F.)			1	No-load Current	0.987 A
NEMA Nom. Eff.	64	Power Factor	90	Line-line Res. @ 25°C	11.488 Ω A Ph 9.5258 Ω B Ph
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load		

Load Characteristics 230 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	75	83	88	90	92	93
Efficiency	34	52.1	61.3	64.6	63.9	59.8
Speed	1759.9	1728.4	1690.3	1642	1577	1489.7
Line amperes	1.11	1.31	1.56	1.85	2.22	2.67


ABB Motors and Mechanical Inc.

WINDING # 34WGR070

Typical performance - not guaranteed values.


0.33 HP 1 PH 60 HZ 1625 RPM 230 V 3414C

TORQUES (LB-FT): PO=2.17 PU=0.709 LR=0.779 LRA=5.37

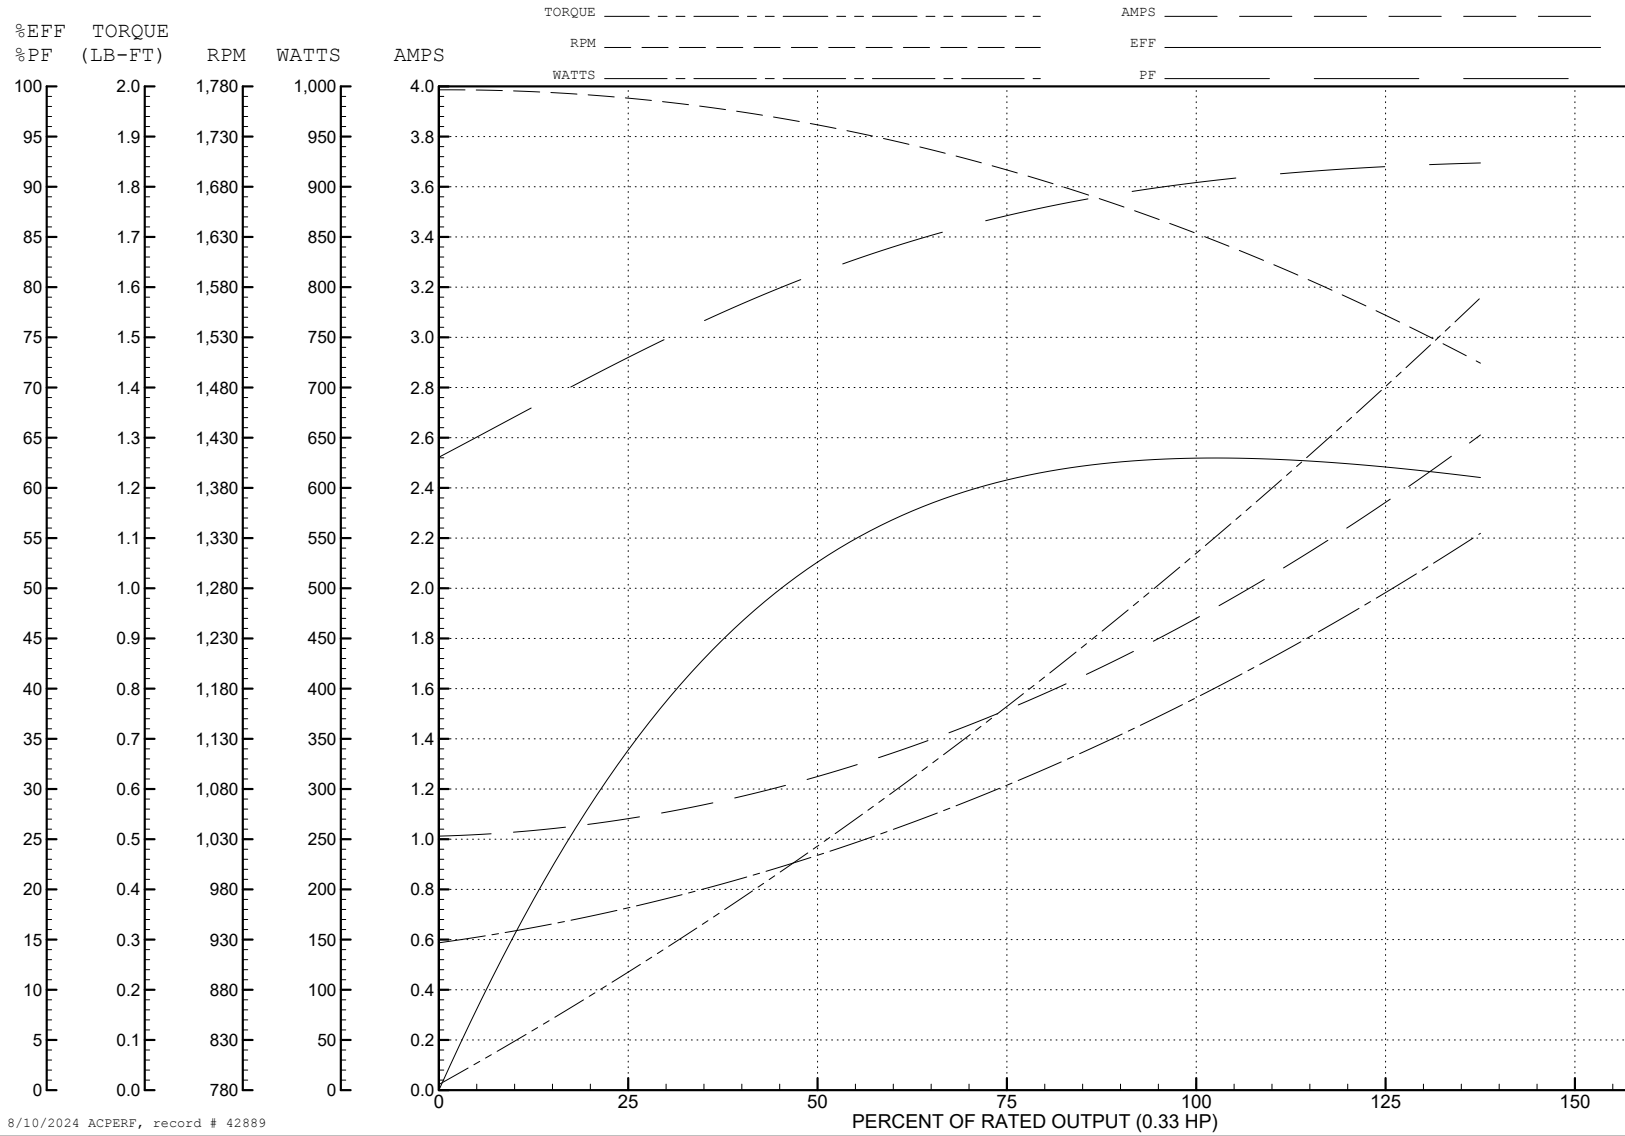

8/10/2024 ACPERF, record # 42889

34LYM259

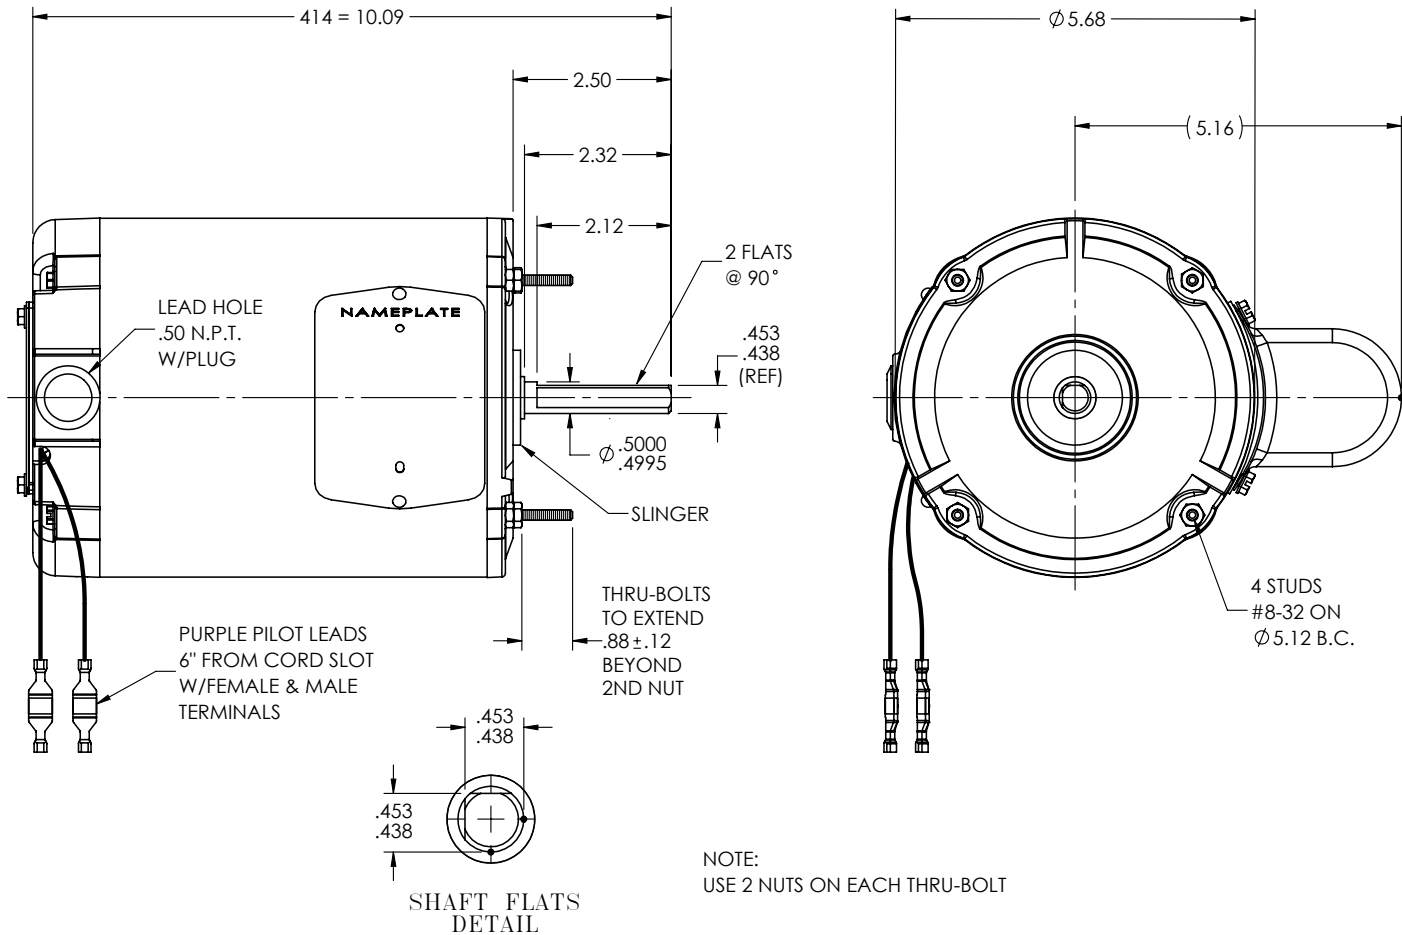

NOTE:
USE 2 NUTS ON EACH THRU-BOLT

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: UPDATE CONN'S SHOWING IN LAYOUYT TO WD1000A27, A28			
REV: B	VERSION: 02	REVISED: 10:26:40 06/21/2023	TDR: 000001211422
34LYM259		MODEL NO. 34LYM259	REF: -
		BY: ENJEFD0	

BALDOR - RELIANCE®

VER 34C NEMA 48Z TEAO TERM PANEL, PILOT CIRCUIT, CAP @ 3:00

34LYM259

CD0804A01

