
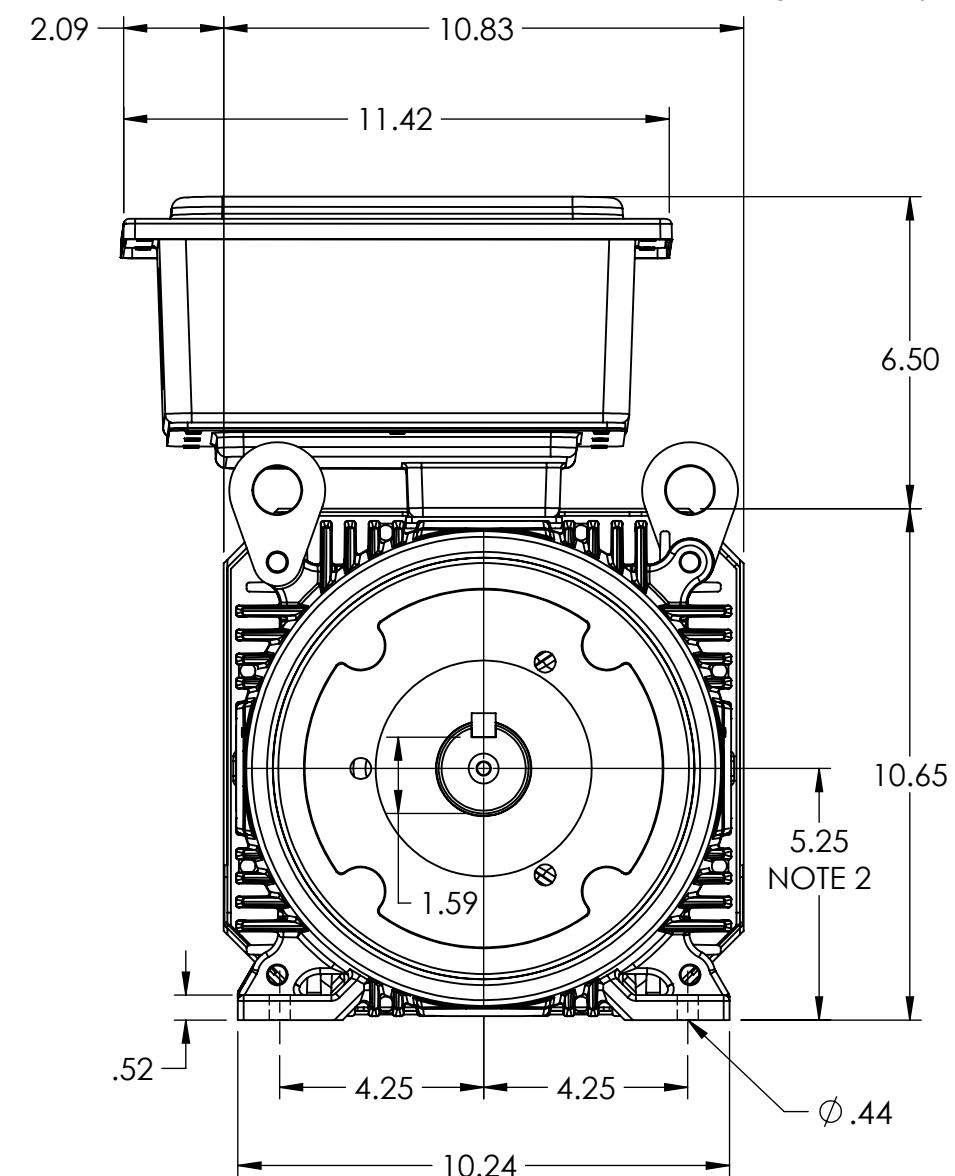


COOLING: BLOWER COOLED

ACCESSORIES: PROVISIONS FOR  
TACHOMETER MOUNTING  
ONLY WHEN SPECIFIED

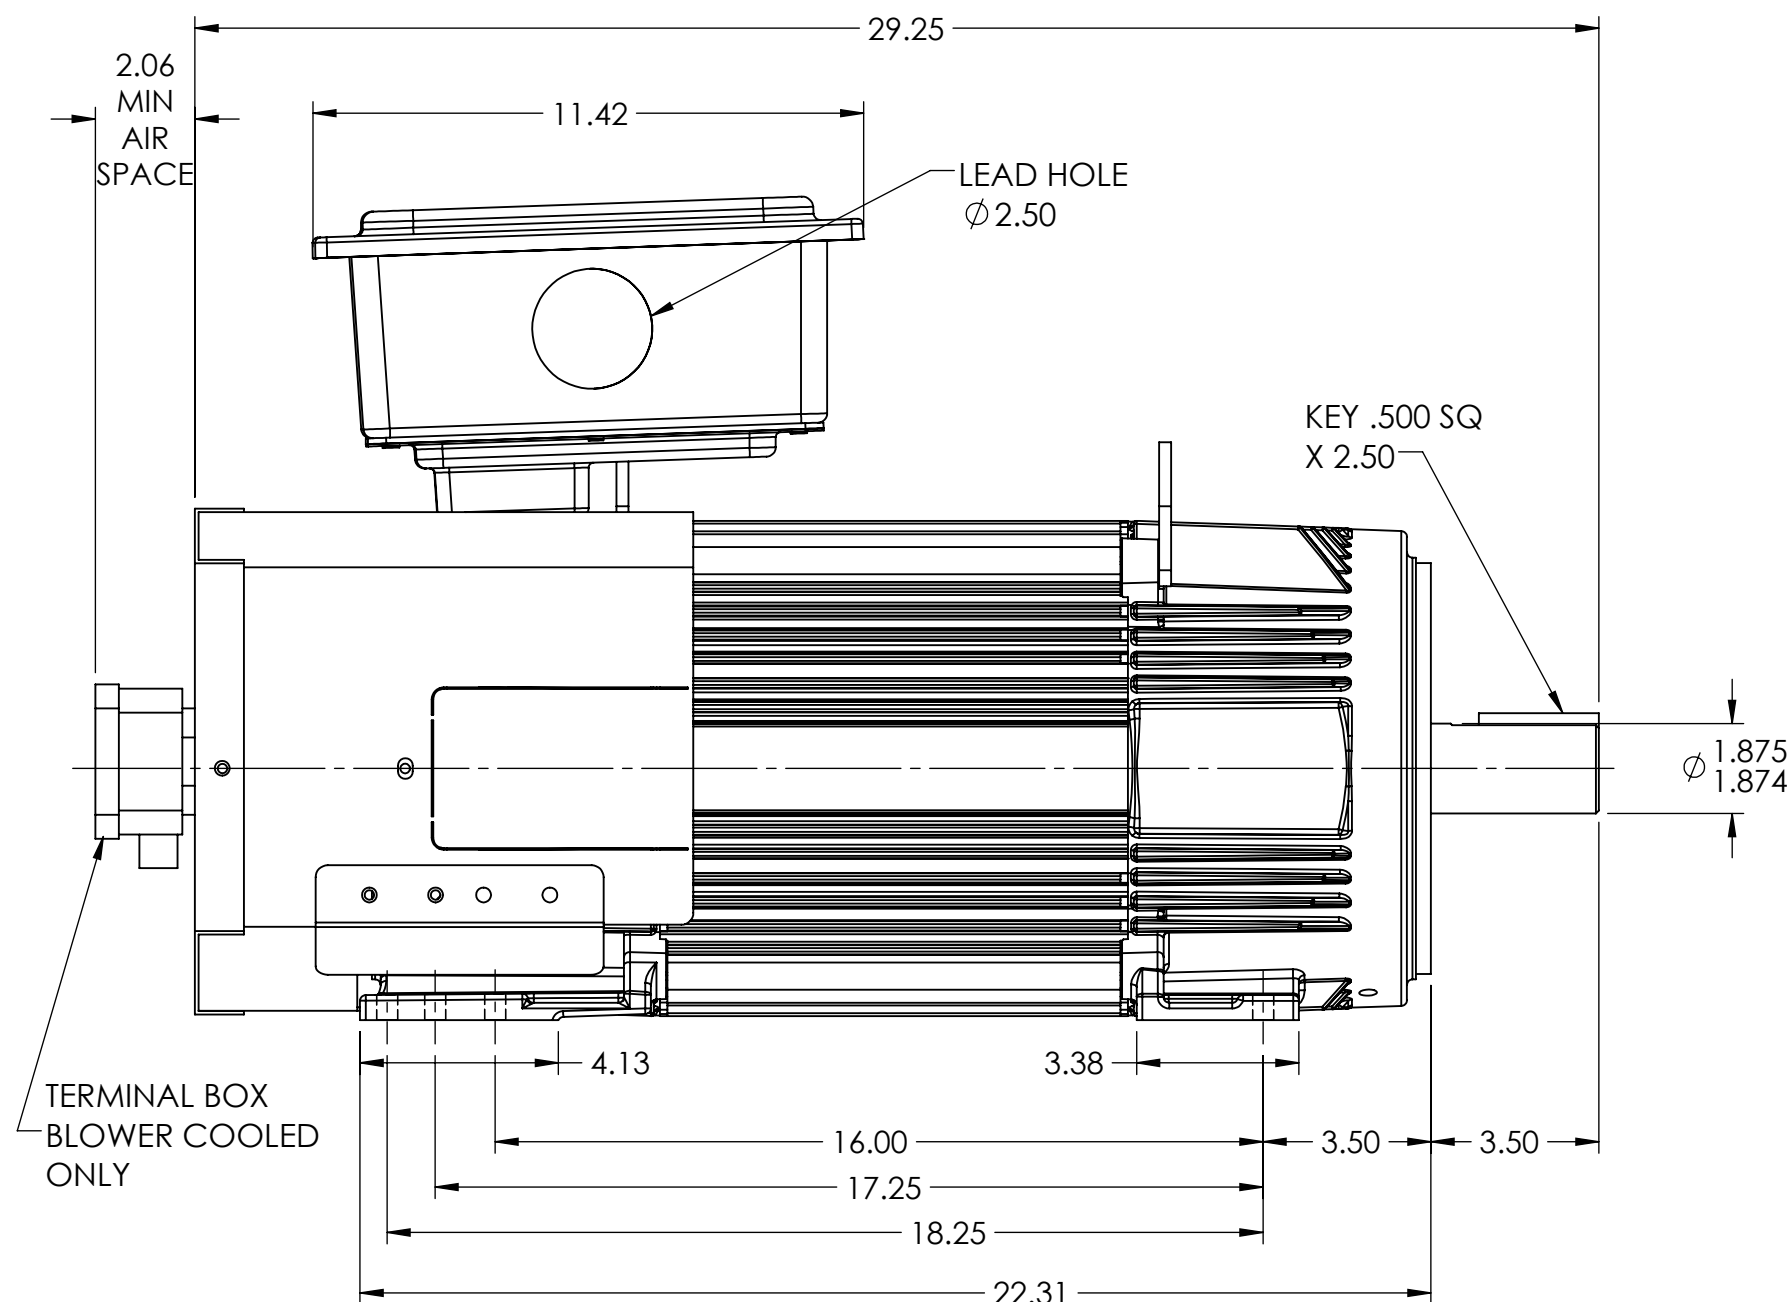

NOTE 1 O.D.E. C-FACE & TACHOMETER MOUNTING  
1/2-13 TAP, .88 IN. DEEP, ON A Ø7.25 IN. BOLT CIRCLE  
FACE RUNOUT AND ECCENTRICITY .004 MAX T.I.R.

NOTE 2 SHAFT HEIGHT WILL NOT BE EXCEEDED.  
SHIMS UP TO .05mm IN THICKNESS ARE USUALLY  
REQUIRED FOR COUPLED OR GEARED MACHINES.

235 AMP TERMINAL BOX SHOWN  
ROTATABLE IN 90° INCREMENTS

DIMENSIONS ARE IN INCHES SCALE: 1.00

MOTOR WEIGHT: 355 LBS. (MAY VARY 15%)

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: MODEL AND REDRAW IN SOLIDWORKS			
REV: A	VERSION: 01	REVISED: 01:38:32 01/26/2023	TDR: 000001202962
MODEL NO. 617525-053			REF: -
BY: USWATUR			

BALDOR - RELIANCE®

DIM SHT,FL2173Z,TEBC,PROV FOR TACH WHEN SPEC,F3 MILL BOX

617525-053