617513-073

RPM–AC FINNED FRAME VARIABLE SPEED ALTERNATING CURRENT MOTOR FL2158Z

ENCLOSURE: TOTALLY ENCLOSED

MOUNTING: FOOT

DRIVE METHOD: COUPLED OR BELTED

COOLING: FAN COOLED

ACCESSORIES: PROVISIONS FOR TACHOMETER MOUNTING ONLY WHEN SPECIFIED

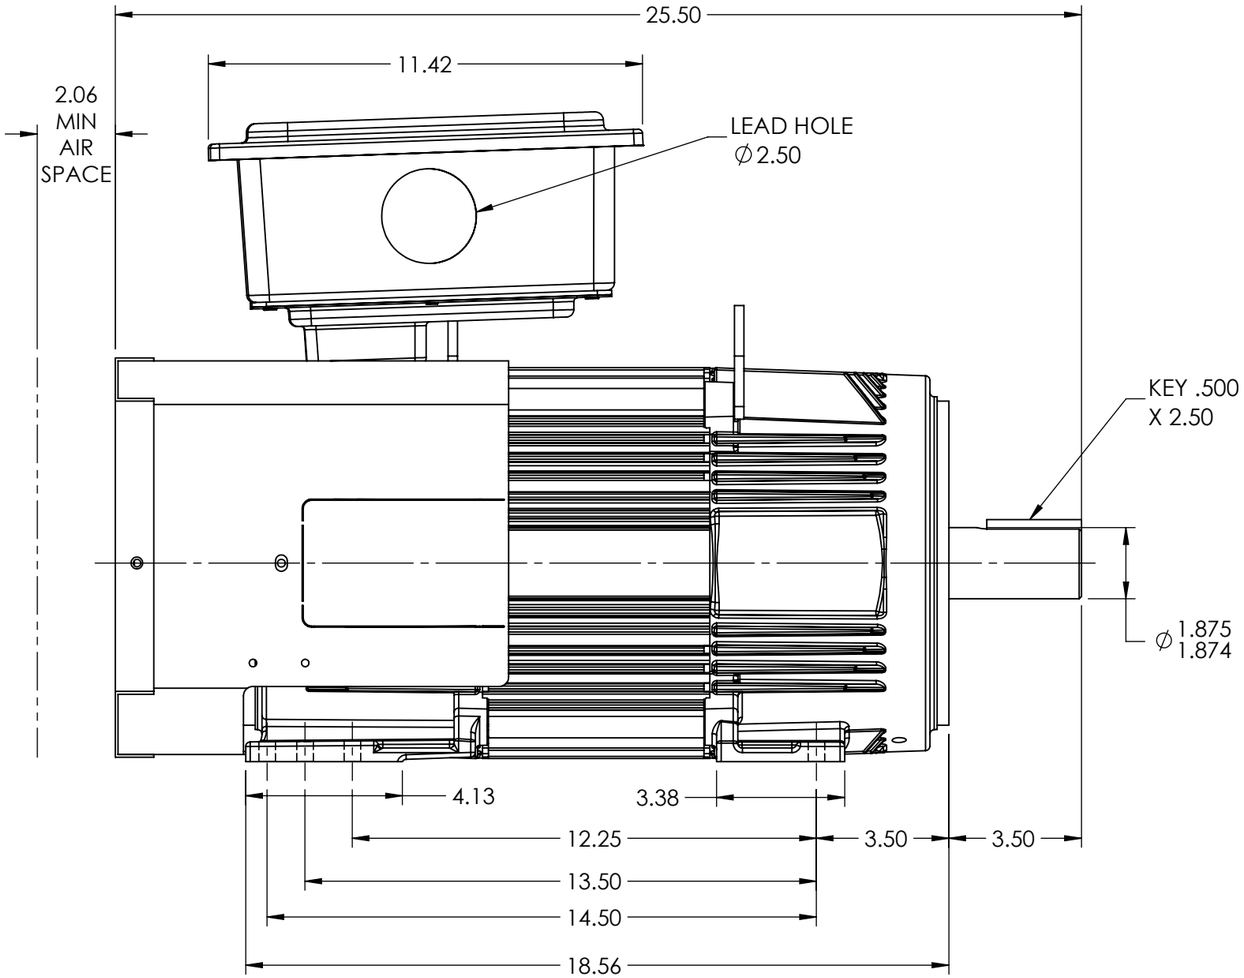

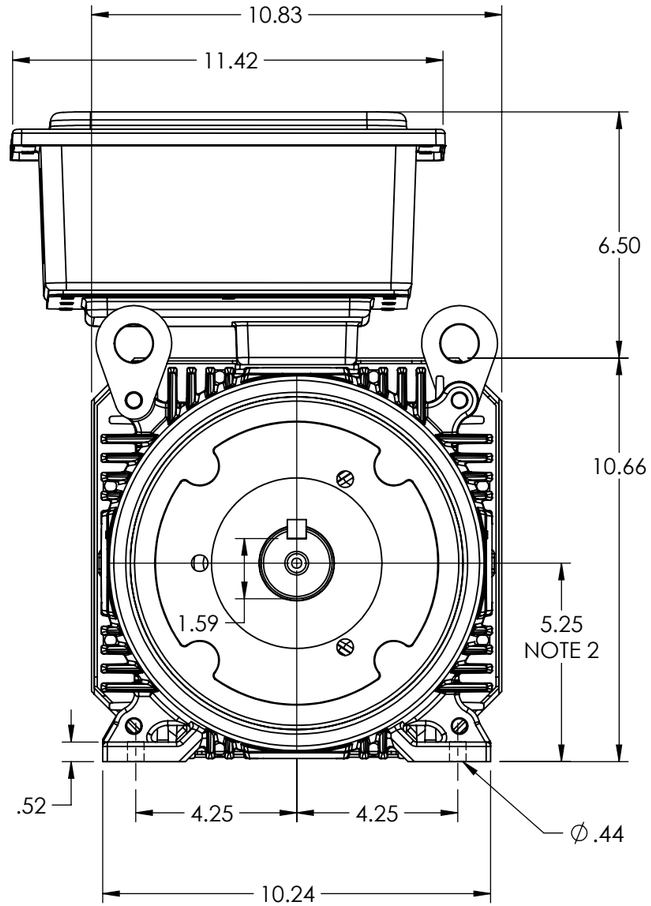

NOTE 1 O.D.E. C-FACE & TACHOMETER MOUNTING
1/2-13 TAP, .88 IN. DEEP, ON A ∅7.25 IN. BOLT CIRCLE
FACE RUNOUT AND ECCENTRICITY .004 MAX T.I.R.

NOTE 2 SHAFT HEIGHT WILL NOT BE EXCEEDED.
SHIMS UP TO .05mm IN THICKNESS ARE USUALLY
REQUIRED FOR COUPLED OR GEARED MACHINES.

235 AMP TERMINAL BOX SHOWN

ROTATABLE IN 90° INCREMENTS

DIMENSIONS ARE IN INCHES SCALE: 1.00

MOTOR WEIGHT: 270 LBS. (MAY VARY 15%)

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: MODEL AND REDRAW IN SOLIDWORKS			
REV: A	VERSION: 01	REVISED: 03:26:18 01/30/2023	TDR: 000001202962
MODEL NO. 617513-073			REF: -
BY: USWATUR			B

BALDOR - RELIANCE®

DIM SHT,RPMAC,FL2158Z,TEFC,F3 MILL BOX

617513-073