617525-083

RPM–AC FINNED FRAME VARIABLE SPEED ALTERNATING CURRENT MOTOR
FL2173CZ

ENCLOSURE: TOTALLY ENCLOSED

MOUNTING: FOOT / NEMA 250TC C-FACE

DRIVE METHOD: COUPLED OR BELTED

COOLING: FAN COOLED

ACCESSORIES: PROVISIONS FOR TACHOMETER MOUNTING ONLY WHEN SPECIFIED

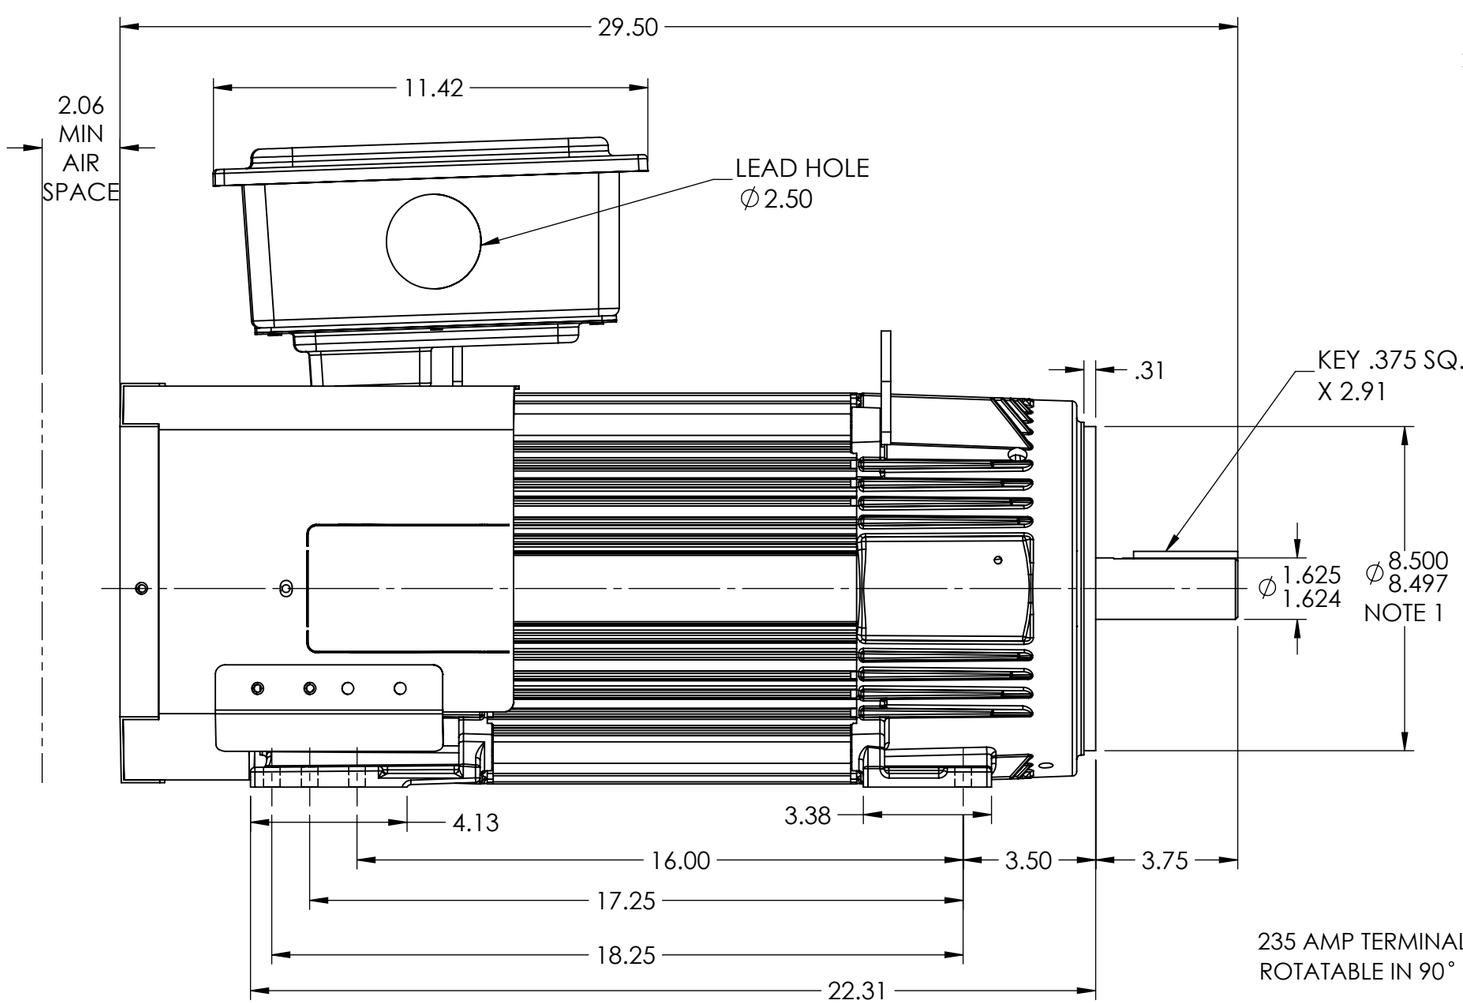

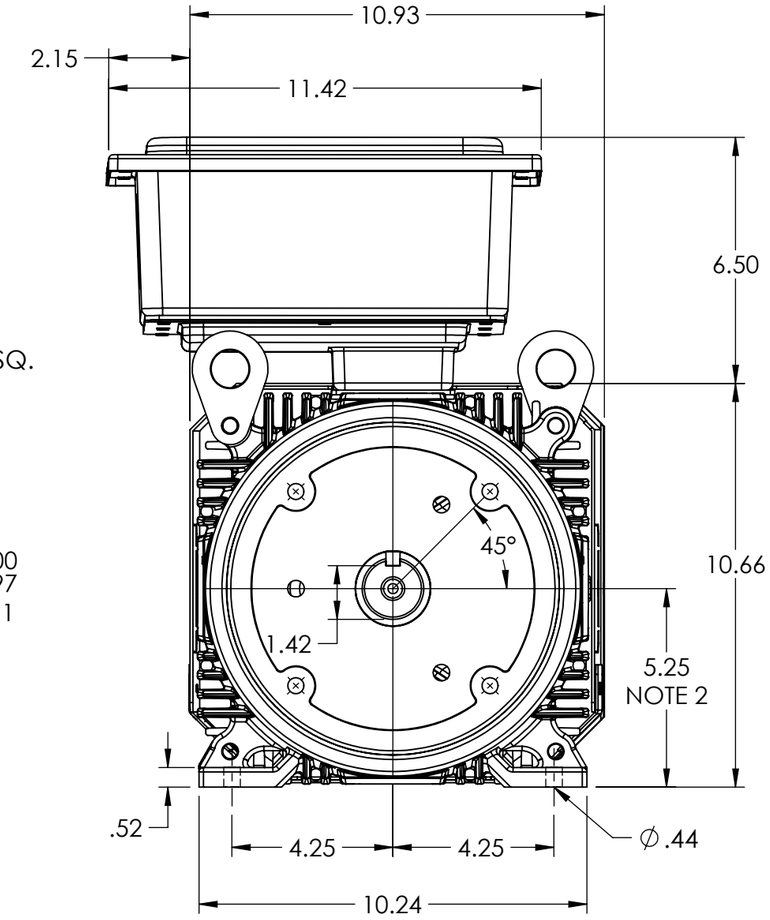

235 AMP TERMINAL BOX SHOWN
ROTATABLE IN 90° INCREMENTS

DIMENSIONS ARE IN INCHES SCALE: 1.00

MOTOR WEIGHT: 355 LBS. (MAY VARY 15%)

NOTE 1 O.D.E. C-FACE & TACHOMETER MOUNTING
1/2-13 TAP, .88 IN. DEEP, ON A ∅7.25 IN. BOLT CIRCLE
FACE RUNOUT AND ECCENTRICITY .004 MAX T.I.R.

NOTE 2 SHAFT HEIGHT WILL NOT BE EXCEEDED.
SHIMS UP TO .05mm IN THICKNESS ARE USUALLY
REQUIRED FOR COUPLED OR GEARED MACHINES.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: MODEL AND REDRAW IN SOLIDWORKS			
REV: A	VERSION: 01	REVISED: 01:47:04 01/26/2023	TDR: 000001202962
MODEL NO. 617525-083			REF: -
BY: USWATUR			B

BALDOR - RELIANCE®

DIM SHT,FL2173CZ,TEFC,FT/NEMA 250TC C FACE MTG,F3 MILL BOX

617525-083