

BALDOR® • RELIANCE®

Customer information packet

L1209-50

.5 /KW .37, 1440RPM, 1PH, 50HZ, 48, 3424LC, OP

Part detail

Revision	F
Type	AC
Mech. spec.	34F351
Base	
Status	PRD/A
Elec. spec.	34WGX075
Layout	34LYF351
Eff. date	12-31-2024
CD Diagram	CD0055
Poles	04
Leads	6#18
Proprietary	True
Created date	02-16-2023

Nameplate

NP1372L										
CAT.NO.	L1209-50									
SPEC.	34F351X075G1									
HP	.5 /KW .37									
VOLTS	110/220									
AMP	5.2/2.6									
R.P.M. (1/MIN)	1440									
FRAME	48	HZ	50	PH	1					
SER.F.	1.25	CODE	K	DES	-	CL	B			
NEMA-NOM-EFF	72.7	PF	89							
RATING	40C AMB-S1 CONT									
CC	IP23 15KG IC01									
DE	6203	ODE	6203							
ENCL	OPEN	SN								
SFA 6.2/3.1										

AC Induction Motor Performance Data

Record # 101564

Typical performance - not guaranteed values

Winding: 34WGX075-R001		Type: 3424LC		Enclosure: OPEN	
Nameplate Data			220 V, 50 Hz: High Voltage Connection		
Rated Output (KW)	.37	Full Load Torque	1.809 LB-FT		
Volts	110/220	Start Configuration	direct on line		
Full Load Amps	5.2/2.6	Breakdown Torque	5.01 LB-FT		
R.P.M.	1440	Pull-up Torque	4.58 LB-FT		
Hz	50 Phase	1	Locked-rotor Torque	5.62 LB-FT	
NEMA Design Code	- KVA Code	K	Starting Current	18.7 A	
Service Factor (S.F.)	1.25		No-load Current	1.35 A	
NEMA Nom. Eff.	72.7 Power Factor	89	Line-line Res. @ 25°C	4.8685 Ω A Ph 4.0366 Ω B Ph	
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	43°C	
S.F. Amps	6.2/3.1		Temp. Rise @ S.F. Load	51°C	

Load Characteristics 220 V, 50 Hz, 0.37 KW

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	65	78	85	89	92	93	92
Efficiency	43.9	61.4	69.7	73.2	74.3	73.7	74.3
Speed	1485.2	1474.4	1461.8	1448.3	1432.2	1413.8	1432
Line amperes	1.49	1.77	2.15	2.58	3.09	3.66	3.09


ABB Motors and Mechanical Inc.

WINDING # 34WX075

0.37 KW 1 PH 50 HZ 1440 RPM 220 V 3424LC

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=5.01 PU=4.58 LR=5.62 LRA=18.7

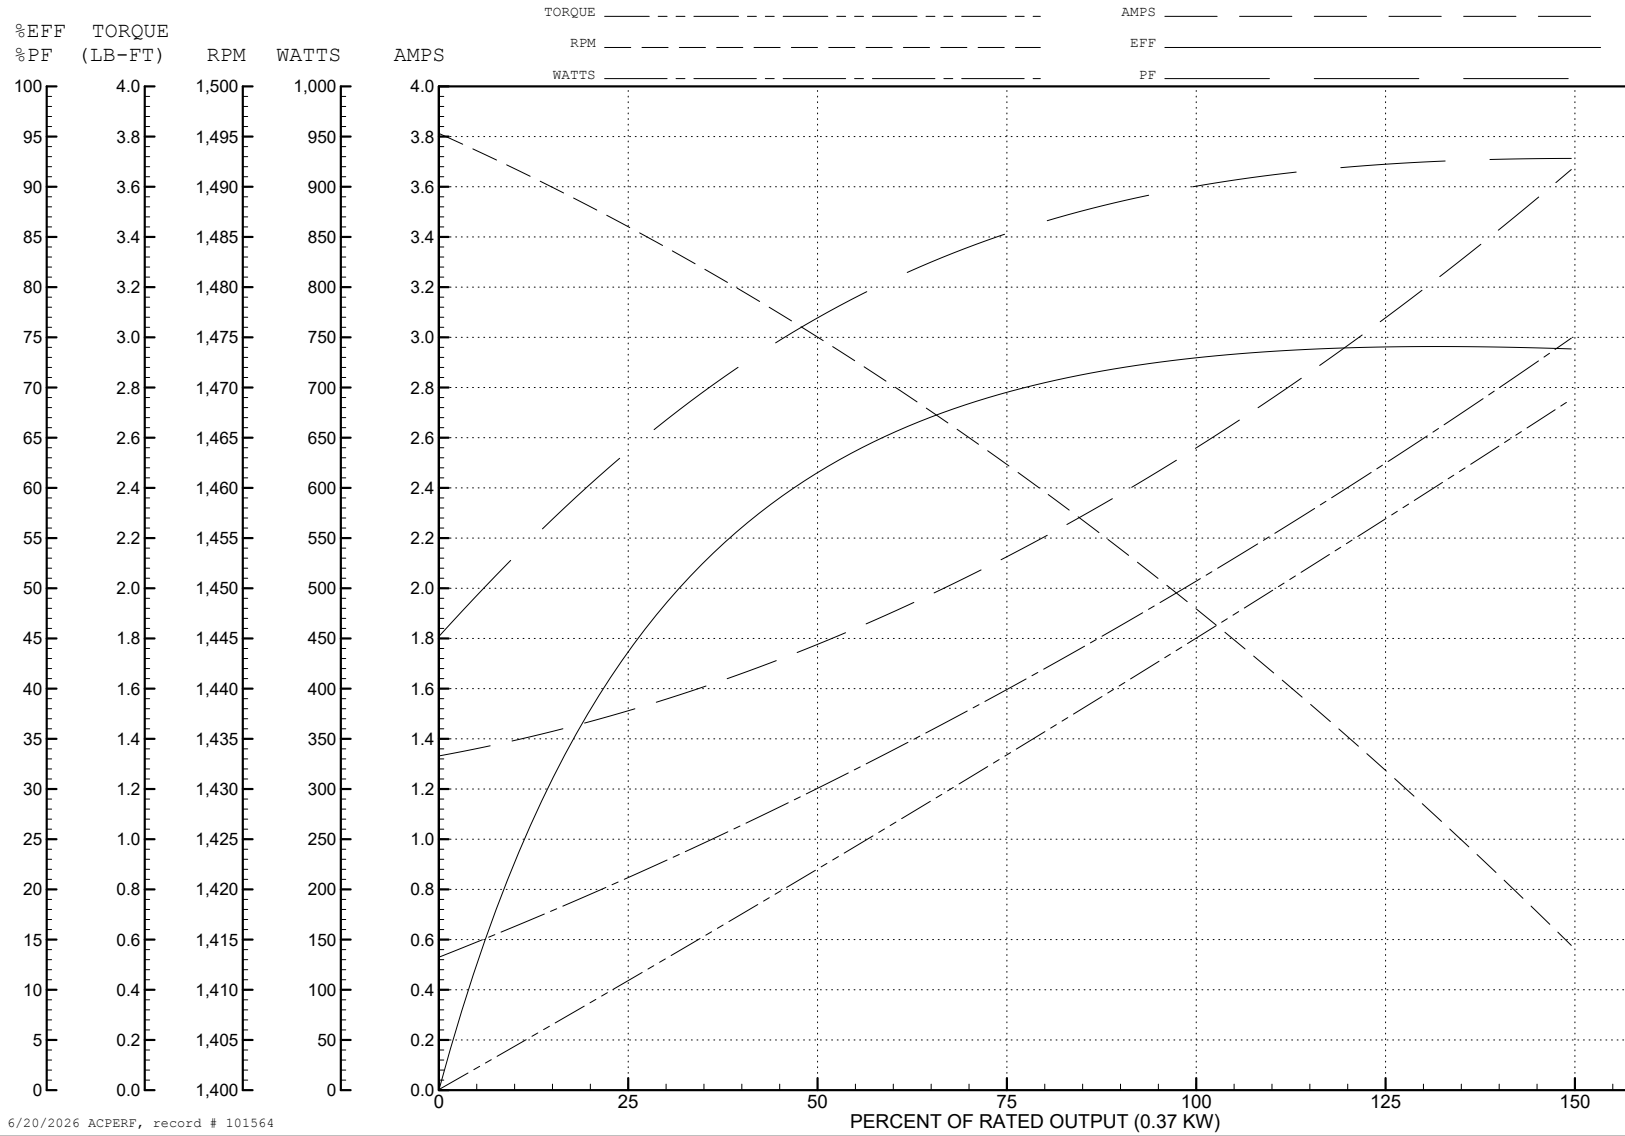

6/20/2026 ACPERF, record # 101564