

BALDOR • RELIANCE

Customer information packet

VSPM3313T

10HP, 1770RPM, 3PH, 60HZ, 215TC, 3750M, OPSB, F

Class - None

Division - Not Applicable

Specifications

Enclosure	ODP
Frame	215TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA_PREMIUM WEEE
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	12.100 A @ 460.0 V 24.200 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	12.1 a

Part detail

Revision	-
Type	AC
Mech. spec.	37T654
Base	
Status	PRD/A
Elec. spec.	37WGZ671
Layout	37LYT654
Eff. date	08-09-2024
CD Diagram	CD0005
Poles	04
Leads	9#14
Proprietary	False
Created date	11-29-2023

Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3750M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	18.94 IN
Power Factor	82
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4423A01A01L											
CAT #	VSPM3313T			WGT	158	LBS					
SPEC	37T654Z671			ENCL	OPSB						
SER #				CC	010A	IP	23				
HP	10	MAG CUR		10.2/5.1							
VOLTS	230/460			NEMA NOM. EFF			92.4				
AMPS	24.2/12.1			PF	82						
RATING	40C AMB-CONT										
RPM	1770			MAX RPM		2700					
FRAME	215TC	HZ	60	CODE	J	CLASS	F				
SER.F.	1.15	SF AMP	27.6/13.8		PH	3	DES	A			
DE	6307		ODE	6206							
LUBRICATION	POLYREX EM										
ID LOGO	INVERTER TYPE		VPWM	CHP	60	TO	90	1.5:1			
ID LOGO	WK2	1.18	CT	6	TO	60	10:1				
ID LOGO	SL HZ	1	VT	3	TO	60	20:1				
				QR							
YR											

AC Induction Motor Performance Data

Record # 96652

Typical performance - not guaranteed values

Winding: 37WGZ671-R001		Type: 3750M		Enclosure: OPSB	
Nameplate Data			460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)	10	Full Load Torque	29.83 LB-FT		
Volts	230/460	Start Configuration	direct on line		
Full Load Amps	24.2/12.1	Breakdown Torque	105 LB-FT		
R.P.M.	1770	Pull-up Torque	47.5 LB-FT		
Hz	60 Phase	3	Locked-rotor Torque	66.1 LB-FT	
NEMA Design Code	A KVA Code	J	Starting Current	107 A	
Service Factor (S.F.)	1.15	No-load Current	6.05 A		
NEMA Nom. Eff.	92.4 Power Factor	82	Line-line Res. @ 25°C	0.89616 Ω	
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	36°C		
S.F. Amps	27.6/13.8	Temp. Rise @ S.F. Load	44°C		
		Locked-rotor Power Factor	35.2		

Load Characteristics 460 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	40	62	74	79	82	84	81
Efficiency	87.9	92.1	92.9	92.7	92	91.2	92.3
Speed	1793.1	1787.3	1781.1	1774.3	1767.2	1759.6	1770
Line amperes	6.71	8.27	10.4	12.8	15.5	18.4	14.4


ABB Motors and Mechanical Inc.

WINDING # 37WGZ671


Typical performance - not guaranteed values.

10 HP 3 PH 60 HZ 1770 RPM 460 V 3750M

TORQUES (LB-FT): PO=105 PU=47.5 LR=66.1 LRA=107

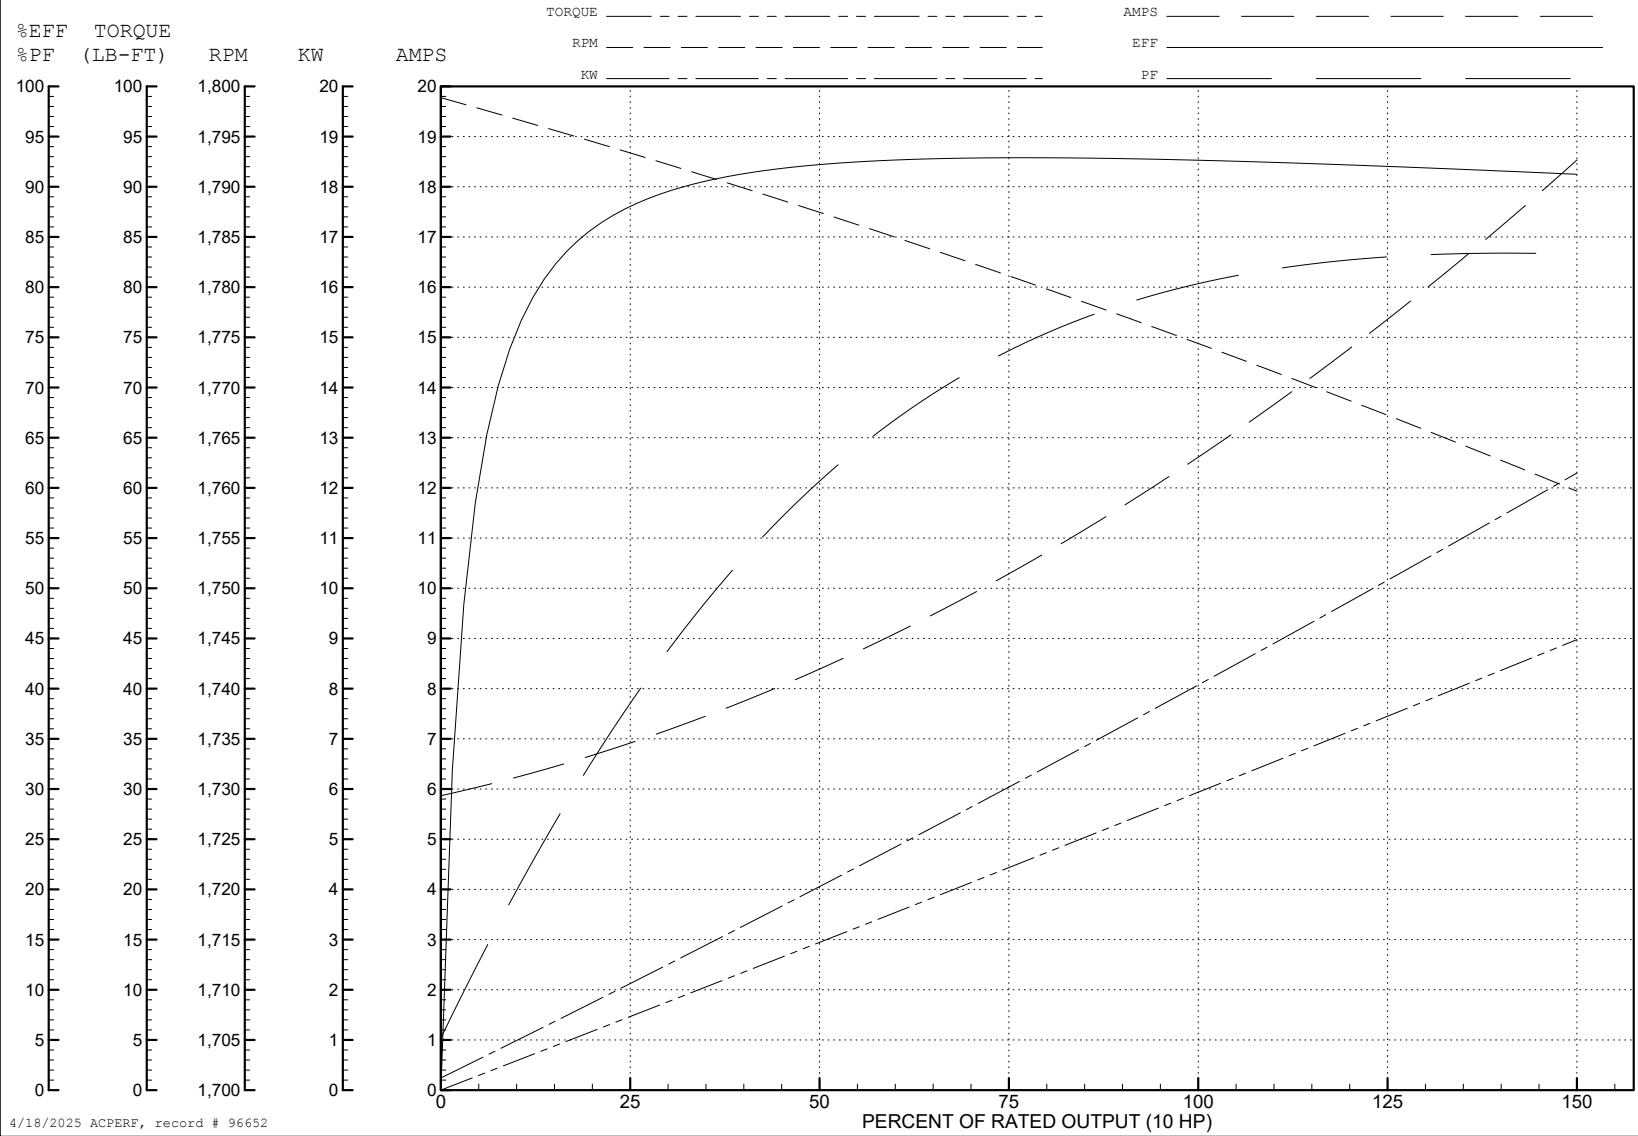


4/18/2025 ACPERF, record # 96652

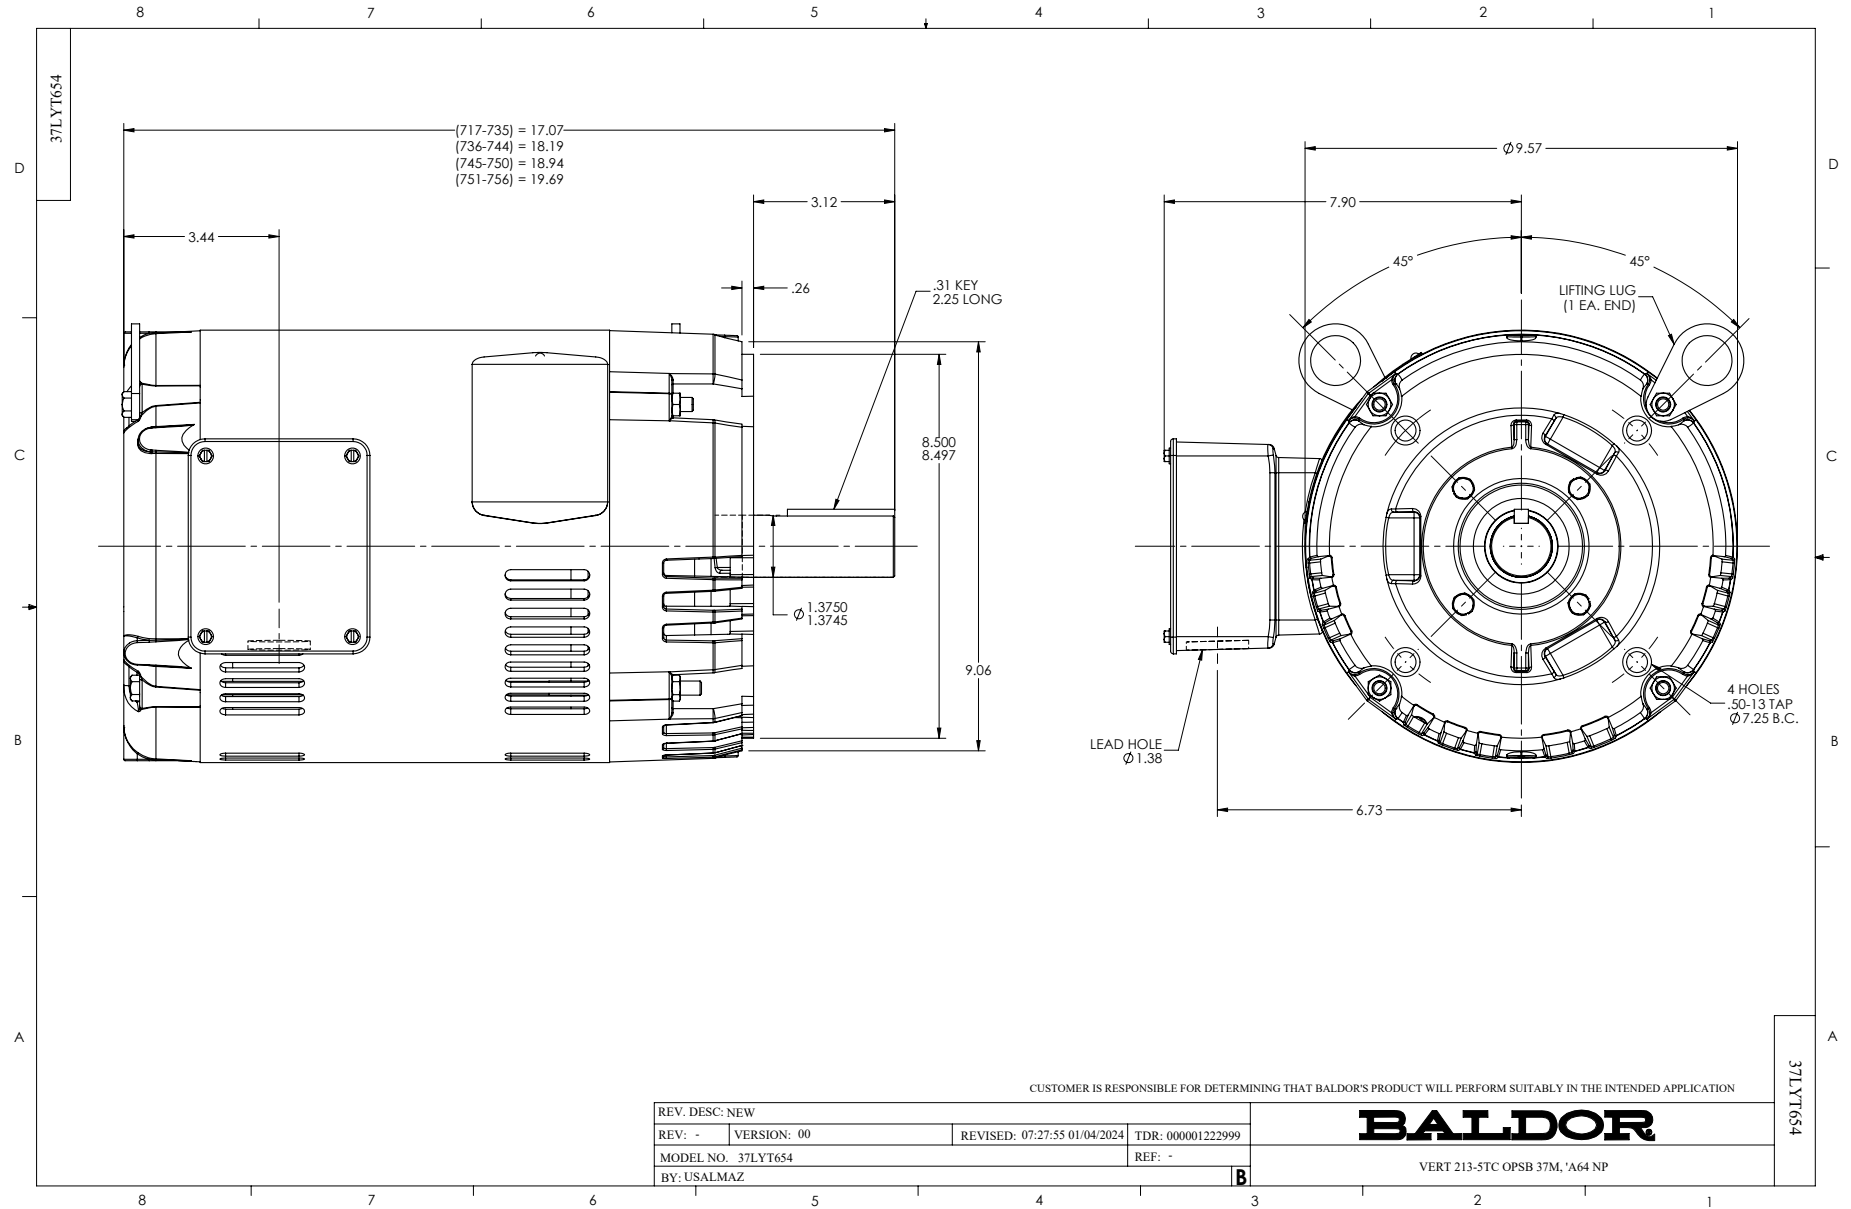

CD0005



LOW VOLTAGE
(2Y)

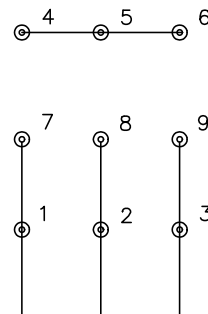

LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS