



---

# Customer information packet

## VXT3014T-5

1HP, 1770RPM, 3PH, 60HZ, 143TC, 0520M, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

## Specifications

Enclosure	TEFC
Frame	143TC
Frame Material	Iron
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
XP Class and Group	CLI GP A,B,C,D
XP Division	Division II
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	3
Current @ Voltage	1.200 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater

## Part detail

Revision	-
Type	AC
Mech. spec.	05E6082
Base	
Status	PRD/A
Elec. spec.	05WGX567
Layout	05LYE6082
Eff. date	01-05-2024
CD Diagram	CD0006
Poles	04
Leads	3#18
Proprietary	False
Created date	12-20-2023

High Voltage Full Load Amps	1.2 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0520M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.54 IN
Power Factor	72
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None
XP Temp Code	T4

**Nameplate**

NP4224L									
<b>CAT.NO.</b>	VXT3014T-5				<b>I.P.</b>	54			
<b>SPEC.</b>	05E6082X567G1				<b>ENCL</b>	TEFC			
<b>FRAME</b>	143TC	<b>H.P.</b>	1		<b>T. CODE</b>	T4			
<b>VOLTS</b>	575		<b>P.F.</b>	72					
<b>F.L. AMPS</b>	1.2		<b>RATING</b>	40C AMB-CONT					
<b>R.P.M.</b>	1770		<b>USABLE AT 208V</b>	N/A					
<b>HZ.</b>	60	<b>PH.</b>	3		<b>CLASS</b>	F			
<b>SER.F.</b>	1.15		<b>DES.</b>	B		<b>SL HZ</b>	1		
<b>NEMA NOM. EFF.</b>	85.5		<b>WK2</b>	0.144					
<b>DE</b>	6205		<b>ODE</b>	6203					
<b>MAG. CUR.</b>	.77								
<b>INV TYPE</b>	PWM	<b>CHP</b>	60		<b>TO</b>	90		<b>INV TEMP CODE</b>	T4
<b>CT</b>	3	<b>TO</b>	60		<b>VT</b>	3		<b>TO</b>	60
<b>CC</b>	010A		<b>SN</b>						
	1.15 SF ON SINE WAVE								
	SFA 1.33								

**AC Induction Motor Performance Data**

Record # 89185

Typical performance - not guaranteed values

<b>Winding: 05WGX567-R003</b>		<b>Type: 0520M</b>		<b>Enclosure: TEFC</b>	
<b>Nameplate Data</b>			<b>575 V, 60 Hz: Single Voltage Motor</b>		
<b>Rated Output (HP)</b>	1	<b>Full Load Torque</b>	2.96 LB-FT		
<b>Volts</b>	575	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	1.2	<b>Breakdown Torque</b>	11.89 LB-FT		
<b>R.P.M.</b>	1770	<b>Pull-up Torque</b>	7.42 LB-FT		
<b>Hz</b>	60	<b>Locked-rotor Torque</b>	9.63 LB-FT		
<b>NEMA Design Code</b>	B	<b>Starting Current</b>	10.72 A		
<b>Service Factor (S.F.)</b>	1.15	<b>No-load Current</b>	0.768 A		
<b>NEMA Nom. Eff.</b>	85.5	<b>Line-line Res. @ 25°C</b>	32.1 Ω		
<b>Rating - Duty</b>	40C	<b>Temp. Rise @ Rated Load</b>	31°C		
<b>S.F. Amps</b>	AMB-CONT	<b>Temp. Rise @ S.F. Load</b>	37°C		
		<b>Locked-rotor Power Factor</b>	62.9842		
		<b>Rotor inertia</b>	0.144 lb-ft <sup>2</sup>		

**Load Characteristics 575 V, 60 Hz, 1 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	33	51	64	72	78	82	76
<b>Efficiency</b>	72.5	82.2	85.1	85.4	85.1	84	85.2
<b>Speed</b>	1792	1784	1776	1768	1758	1748	1762
<b>Line amperes</b>	0.803	0.9	1.04	1.21	1.41	1.63	1.33


ABB Motors and Mechanical Inc.

WINDING # 05WGX567


Typical performance - not guaranteed values.

1 HP 3 PH 60 HZ 1770 RPM 575 V 0520M




TORQUES (LB-FT): PO=11.89 PU=7.42 LR=9.63 LRA=10.72

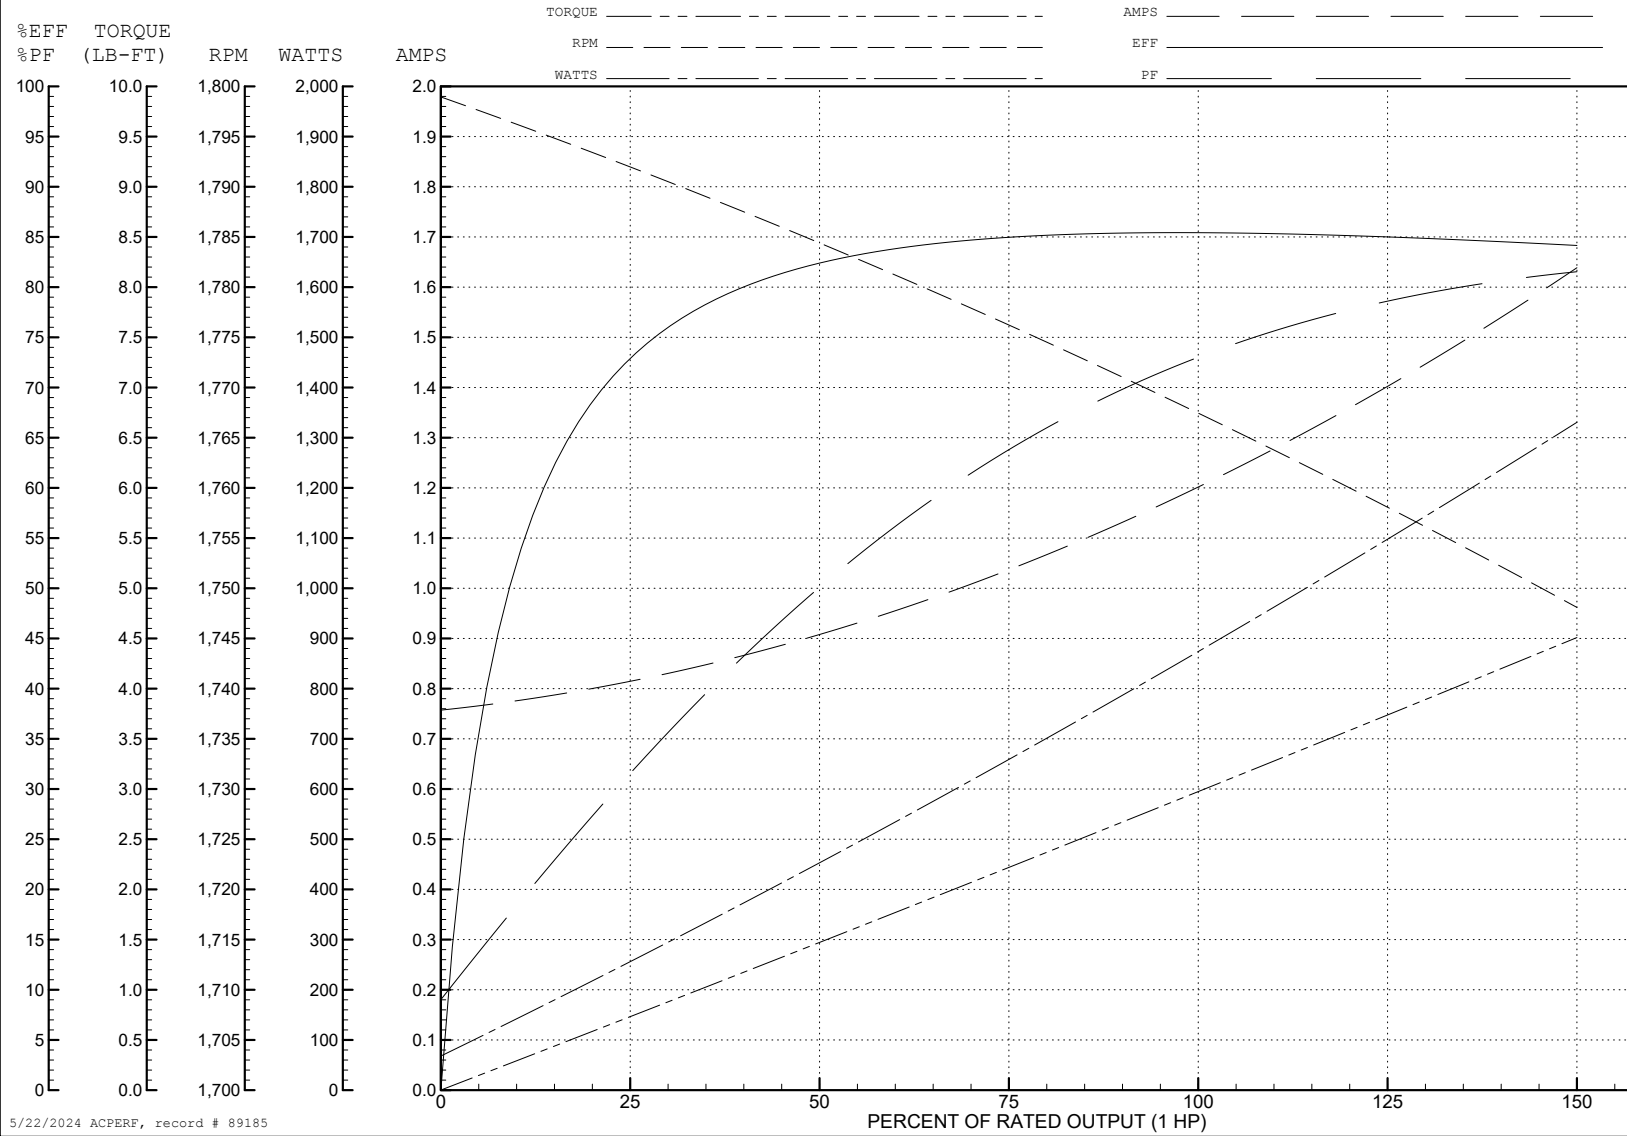

5/22/2024 ACPERF, record # 89185

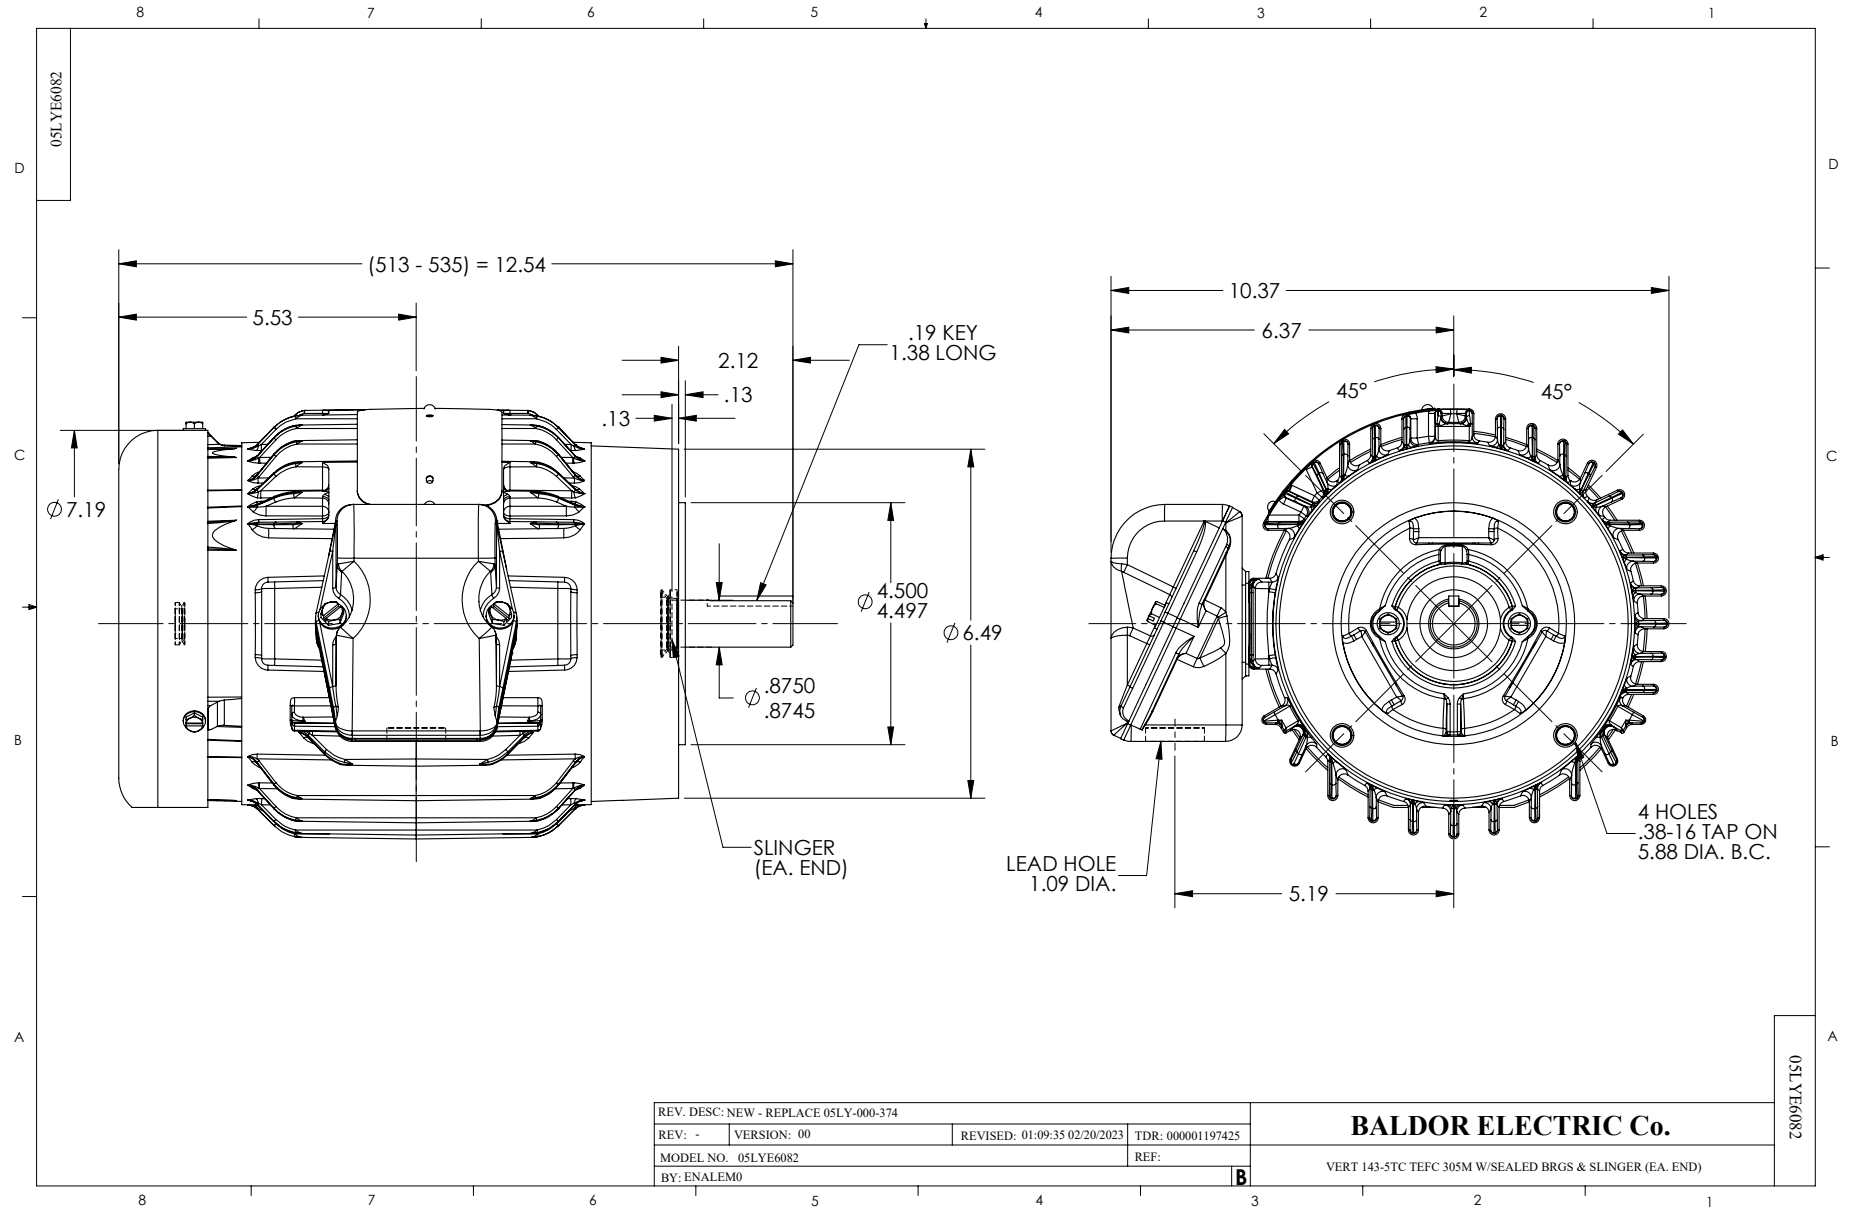

CD0006

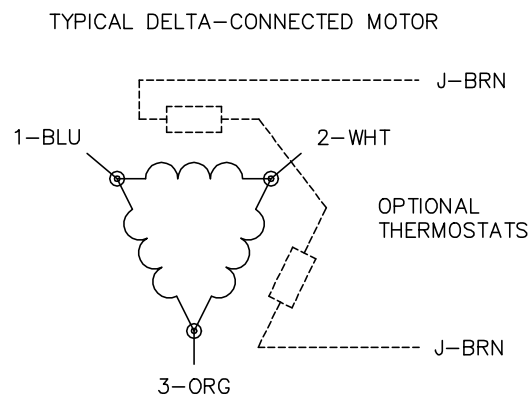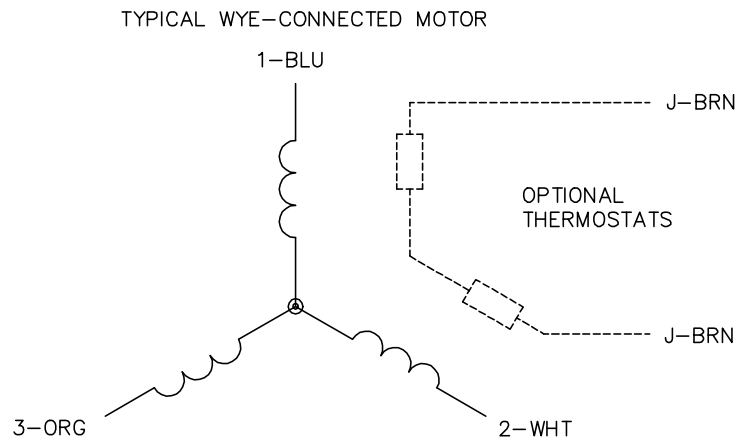

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIRO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1