



Customer information packet

VXT3076T

7.5HP, 1180RPM, 3PH, 60HZ, 254TC, 0954M, TEFC

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	254TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	3
Current @ Voltage	22.400 A @ 208.0 V 21.000 A @ 230.0 V 10.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated

Part detail

Revision	J
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	09WGT564
Layout	09LY-001-011
Eff. date	06-28-2024
CD Diagram	CD0005
Poles	06
Leads	9#12
Proprietary	False
Created date	11-04-2020

Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3A
Heater Indicator	No Heater
High Voltage Full Load Amps	10.5 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0954M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	23.86 IN
Power Factor	71
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4163L										
CAT.NO.	VXT3076T					I.P.	54			
SPEC.	09-0000-2724					ENCL	TEFC			
FRAME	254TC		H.P.	7.5						
VOLTS	230/460		P.F.	71						
F.L. AMPS	21/10.5		RATING	40C AMB-CONT						
R.P.M.	1180									
HZ.	60		PH.	3		CLASS	F			
SER.F.	1.15		DES.	B		SL HZ	1			
NEMA NOM. EFF.	91		WK2	4.34						
DE	6309		ODE	6208						
MAG. CUR.	10.8/5.4									
INV TYPE	PWM	CHP	60	TO	90	T. CODE	T3A			
CT	3	TO	60	VT	3	TO	60			
CC	010A		SN							
USABLE AT 50 HZ 5HP 190/380V										
18.2/9.1A										

AC Induction Motor Performance Data

Record # 69714

Typical performance - not guaranteed values

Winding: 09WGT564-R001		Type: 0954M		Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)	7.5	Full Load Torque	32.4 LB-FT		
Volts	230/460	Start Configuration	direct on line		
Full Load Amps	21/10.5	Breakdown Torque	92 LB-FT		
R.P.M.	1180	Pull-up Torque	36.5 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque	53.6 LB-FT
NEMA Design Code	B	KVA Code	H	Starting Current	64.6 A
Service Factor (S.F.)	1	No-load Current	5.39 A		
NEMA Nom. Eff.	91	Power Factor	71	Line-line Res. @ 25°C	0.952 Ω
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	31°C	
			Locked-rotor Power Factor	25.7	
			Rotor inertia	4.34 LB-FT ²	

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	34	54	65	71	74	75
Efficiency	83.5	90.2	91.2	91.6	91.7	90.8
Speed	1196	1191	1188	1183	1177	1171
Line amperes	5.92	7.13	8.57	10.5	12.7	15.6


ABB Motors and Mechanical Inc.

WINDING # 09WGT564


Typical performance - not guaranteed values.

7.5 HP 3 PH 60 HZ 1180 RPM 460 V 0954M

TORQUES (LB-FT): PO=92 PU=36.5 LR=53.6 LRA=64.6

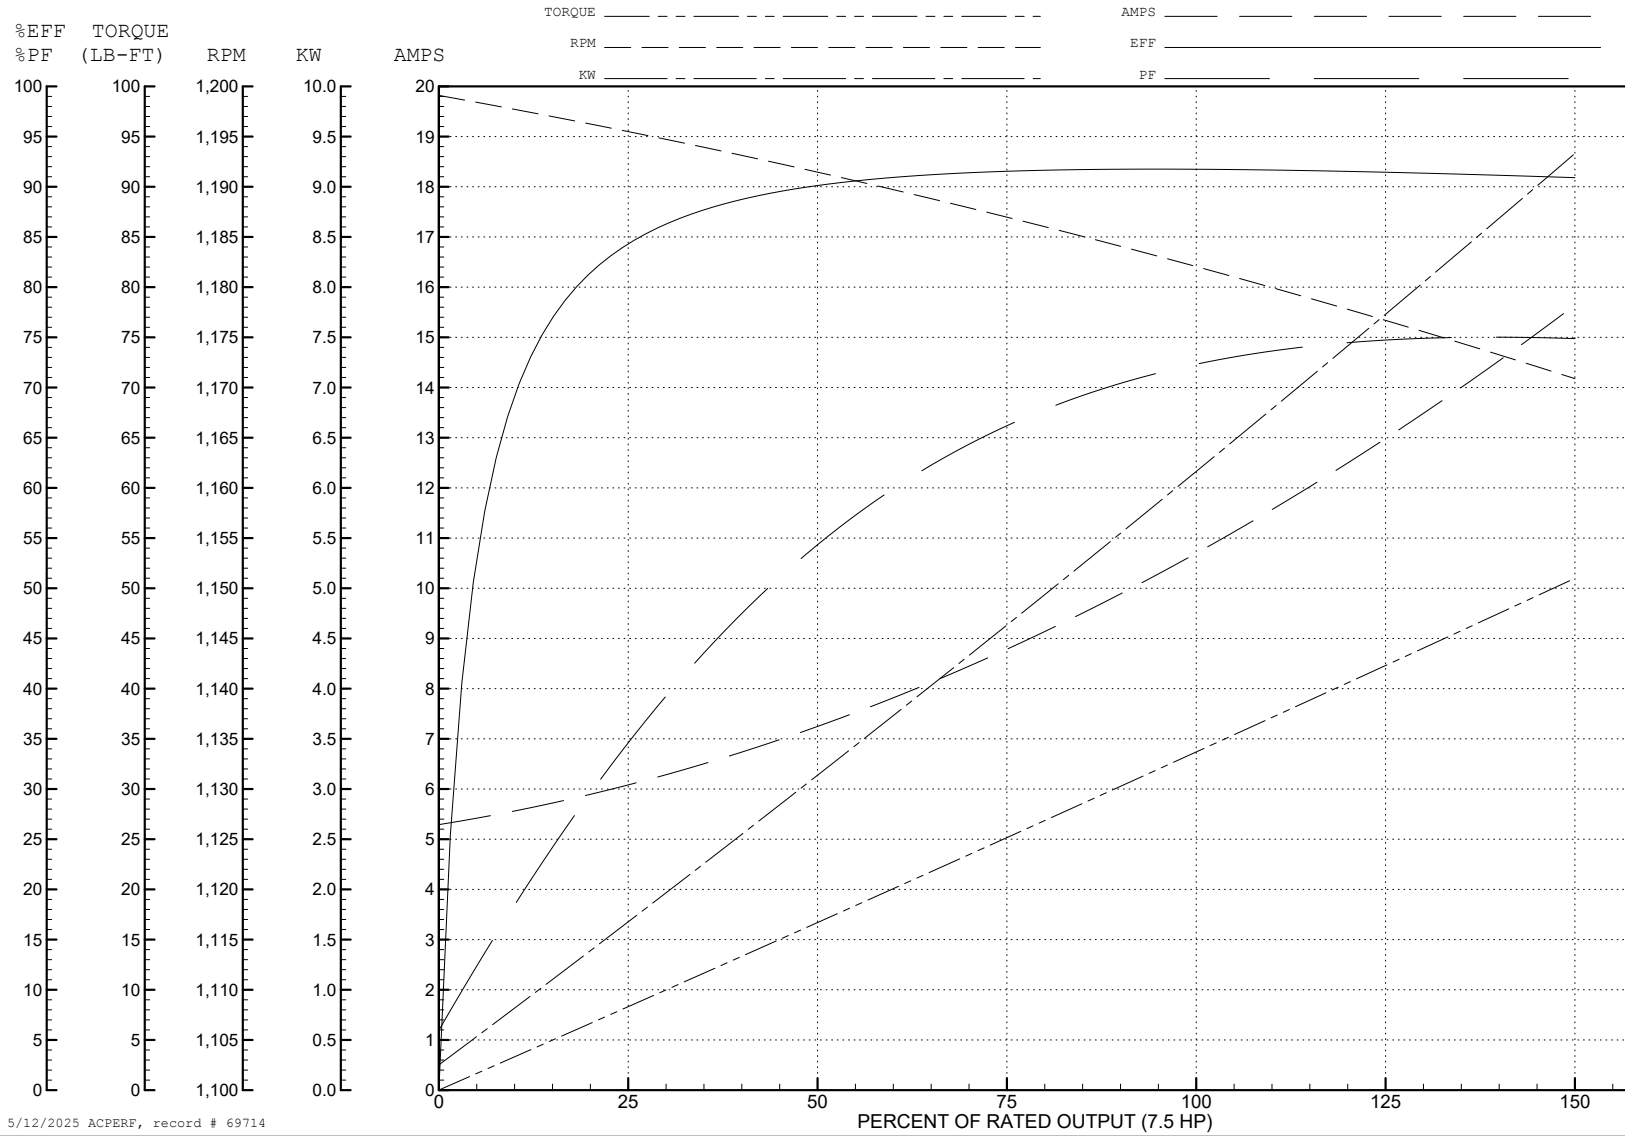


5/12/2025 ACPERF, record # 69714

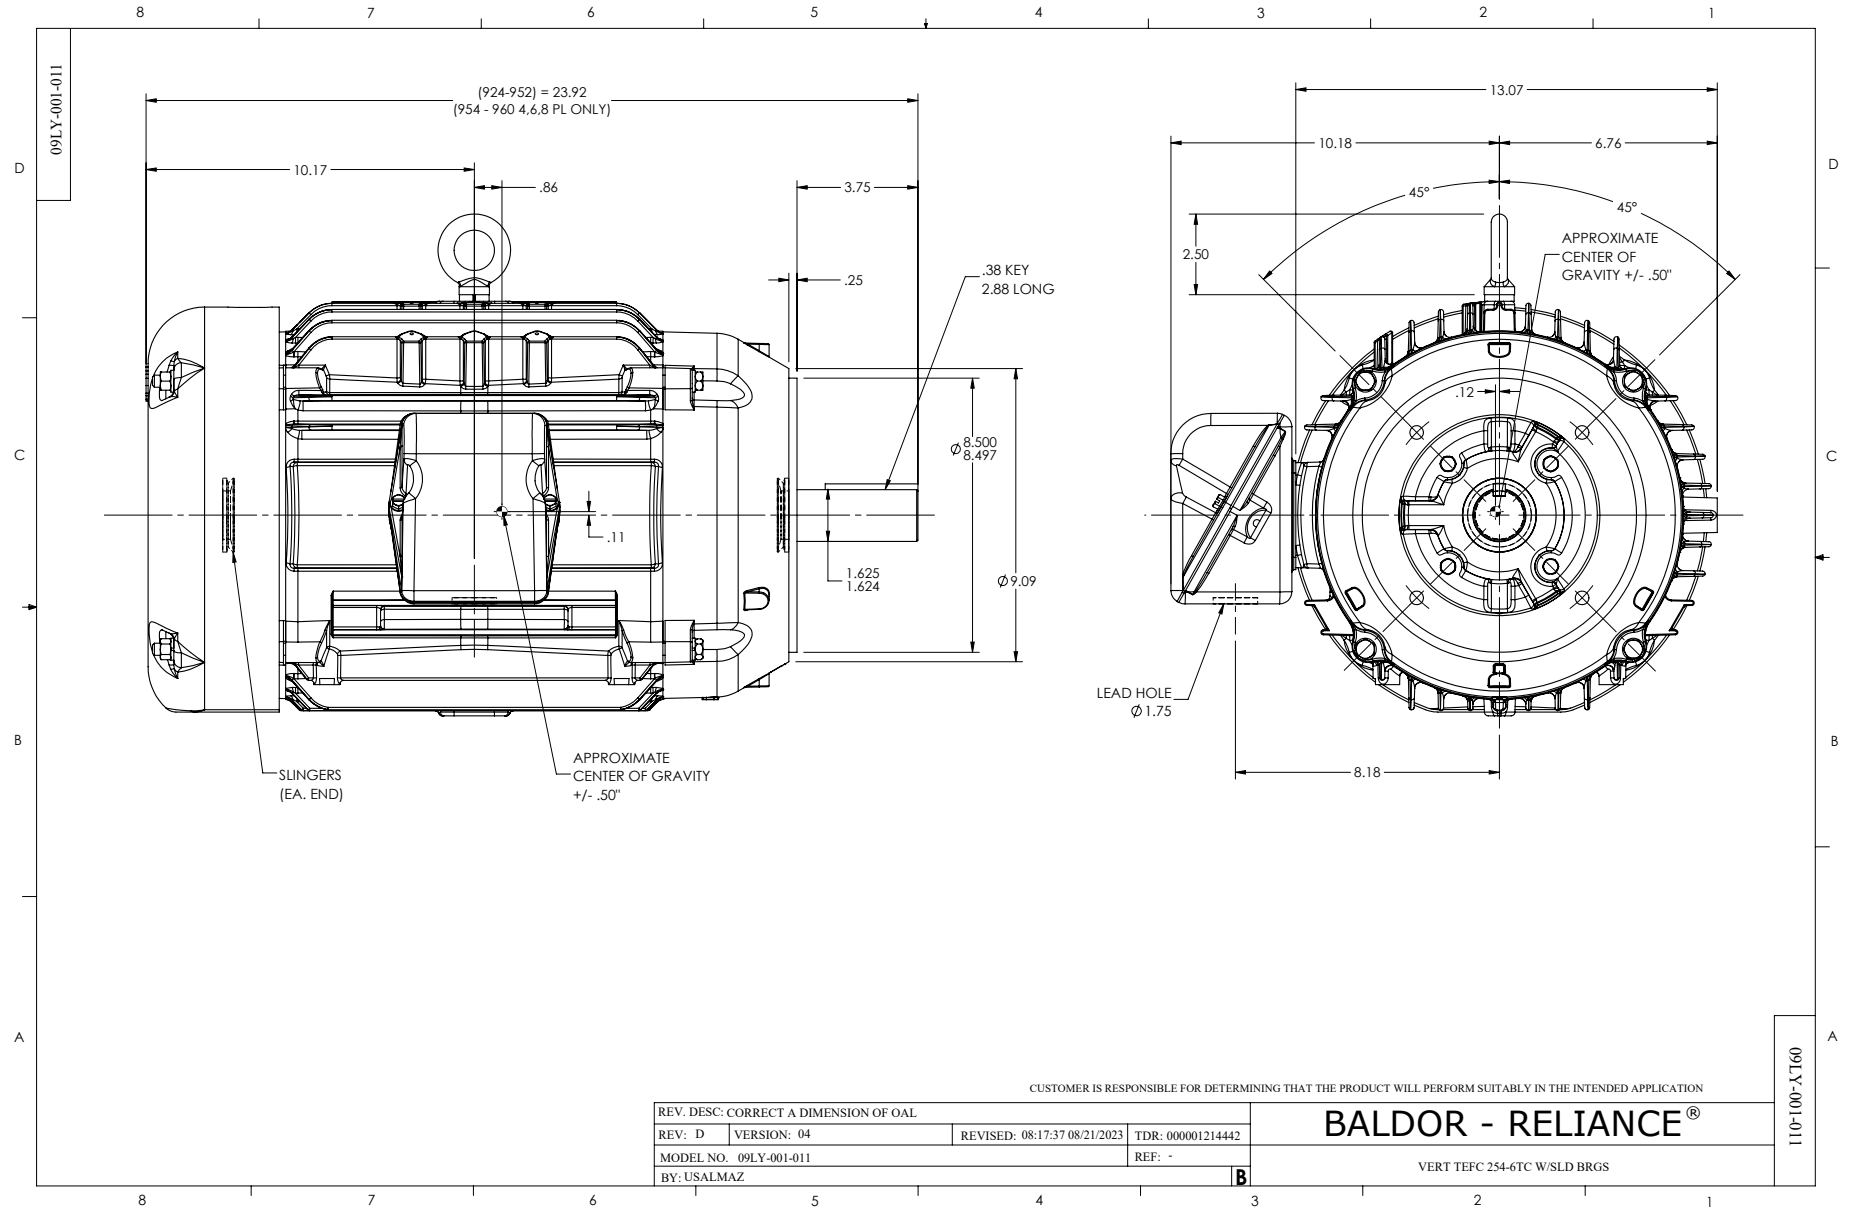

CD0005



LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS