ABB BALDOR RELIANCE

Customer information packet

ZDBRPM402004

200HP, 1785RPM, 3PH, N/AHZ, L4022, TEBC, FOOT,

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/23/2026 1:56:41 AM

Specifications

Enclosure	TEAO
Frame	L4022
Frame Material	Exposed Laminations
Frequency	60.00 Hz
Output @ Frequency	200.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	234.000 A @ 460.0 V
Duty Rating	CONT
Feedback Device	TACHOMETER
Frame Prefix	L
Heater Indicator	No Heater
High Voltage Full Load Amps	234.0 a
Insulation Class	H
Motor Standards	NEMA
Mounting Arrangement	F3
Overall Length	54.12 IN
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.00
Shaft Diameter	2.374 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1785 rpm
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Part Detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	INA/A
Elec. spec.	L0116A
Layout	609994-001
Eff. date	10-04-2019
CD Diagram	422927-001
Poles	04
Leads	
Proprietary	False
Created date	04-09-2015

Nameplate

000613006NS

DUTY	HP	RPM	AMPS	VOLTS	HZ
CONT	200	1785	234	460	60
CONT	200	3750	228	460	126.2

CAT.NO.	ZDBRPM402004	**SPEC. NO.**	P40L1301				
SER.NO		**FR**	L 4022	**INSUL**	H		
PH.	3	**MAX SAFE SPEED**	3750	**AMB.**	40	**MIN. AMB.**	-25
DESIGN NO.	L0116A	**TYPE**		**ENCL.**	TEAO-BC		
S.F.	1.0	**D.E. BRG.**	65BC03J30X				
ENCL MOD		**O.D.E. BRG.**	65BC03J30X				

REL S.O.	–	VOLTS	460	ENCLOSURE	TEBC	WYE CONN EQ CKT OHMS PER PHASE			
FRAME	L4022	AMPS	227	MAX SAFE RPM	3750	(AT BASE RATING, 25 °C)			
HP	200	DUTY	CONT	IM (AMPS)	73	R1	.00965	X1	.0956
BASE SPEED	1785	S.F.	1.0	P.F.@NL/FL	.05/.88	R2	.00690	X2	.121
PHASE/HERTZ	3/60	AMB °C/INSUL	40/H	WK^2 ($Lb-Ft^2$)	61			XM	3.53

RATED FULL LOAD DATA

	RPM	HP	TORQUE LB-FT	FUND VOLTS	FREQ-HZ	AMPS
BASE SPEED	1785	200	588	460	60	227
MAX SPEED	3751	200	280	460	126.2	231
MIN SPEED	0	0	588	6.48	.4907	227

LOAD PERFORMANCE AT BASE SPEED

	RPM	HP	TORQUE LB-FT	FUND VOLTS	FREQ-HZ	AMPS
NO LOAD	1800	0	0	460	60	73.8
1/4	1796	50.0	146	460	60	92.9
1/2	1793	100	293	460	60	131
3/4	1789	150	441	460	60	177
FULL LOAD	1785	200	588	460	60	227
O/L	1777	299	883	460	60	334

REMARKS: TYPICAL DATA
CORRELATED DATA

BALDOR A MEMBER OF THE ABB GROUP

DR. BY MJM
CK. BY MJM
APP. BY MJM
DATE 04-6-92

A-C MOTOR PERFORMANCE DATA L0116A
ISSUE DATE 11-8-12

REL S.O.	-	VOLTS	460	ENCLOSURE	TEBC	WYE CONN EQ CKT OHMS PER PHASE (AT BASE RATING, 25 ℃)	
FRAME	L4022	AMPS	227	MAX SAFE RPM	3750		
HP	200	DUTY	CONT	IM (AMPS)	73	R1 .00965	X1 .0956
BASE SPEED	1785	S.F.	1.0	P.F.@NL/FL	.05/.88	R2 .00690	X2 .121
PHASE/HERTZ	3/60	AMB ℃/INSUL	40/H	WK^2 $(Lb-Ft^2)$	61		XM 3.53

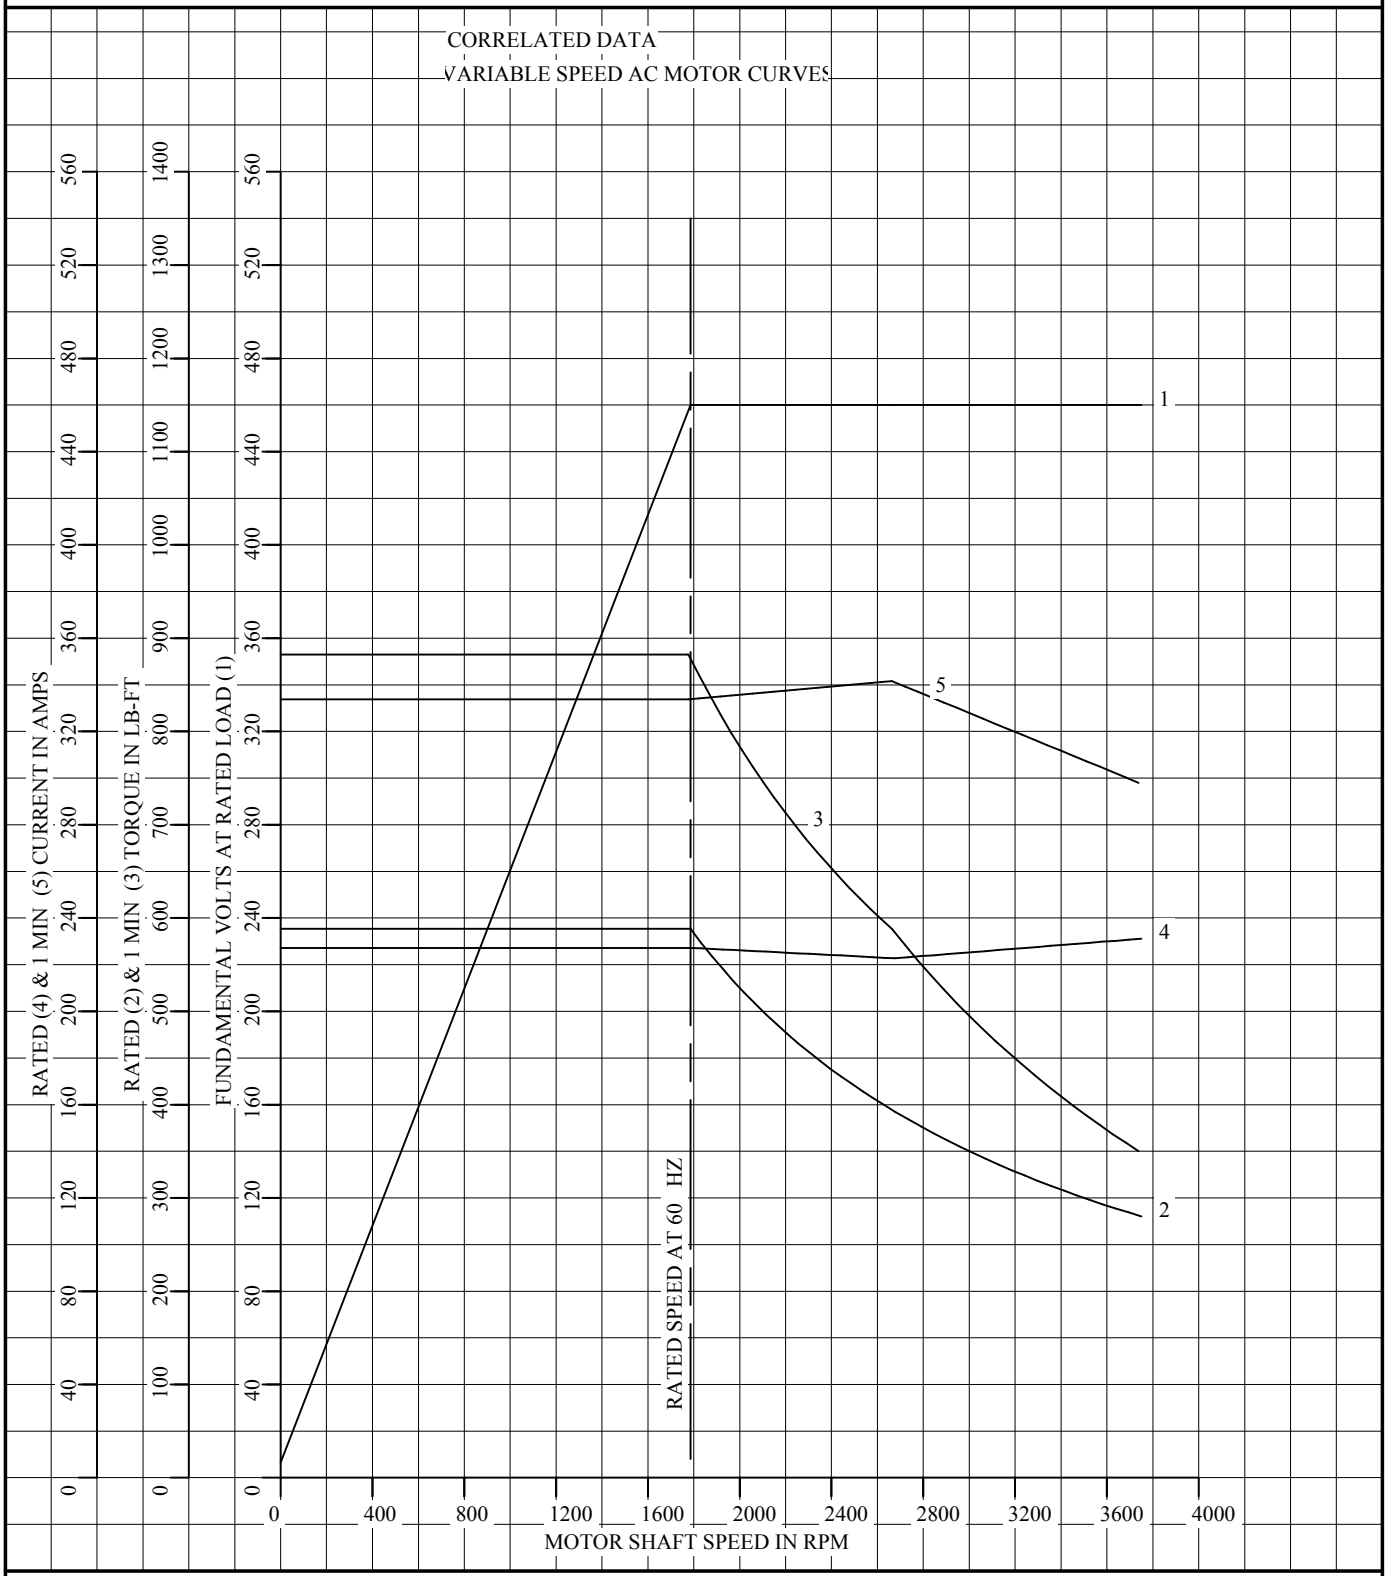

REMARKS: TYPICAL DATA
DATA VALID FOR NAMEPLATE SPEED RANGE ONLY

BALDOR
A MEMBER OF THE ABB GROUP

DR. BY MJM
CK. BY MJM
APP. BY MJM
DATE 04-6-92

A-C MOTOR PERFORMANCE CURVES

L0116A
SH 1 OF 2
ISSUE DATE 11-8-12

REL S.O.	-	VOLTS	460	ENCLOSURE	TEBC	WYE CONN EQ CKT OHMS PER PHASE (AT BASE RATING, 25 °C)	
FRAME	L4022	AMPS	227	MAX SAFE RPM	3750		
HP	200	DUTY	CONT	IM (AMPS)	73	R1 .00965	X1 .0956
BASE SPEED	1785	S.F.	1.0	P.F.@NL/FL	.05/.88	R2 .00690	X2 .121
PHASE/HERTZ	3/60	AMB °C/INSUL	40/H	WK² (Lb-Ft²)	61		XM 3.53

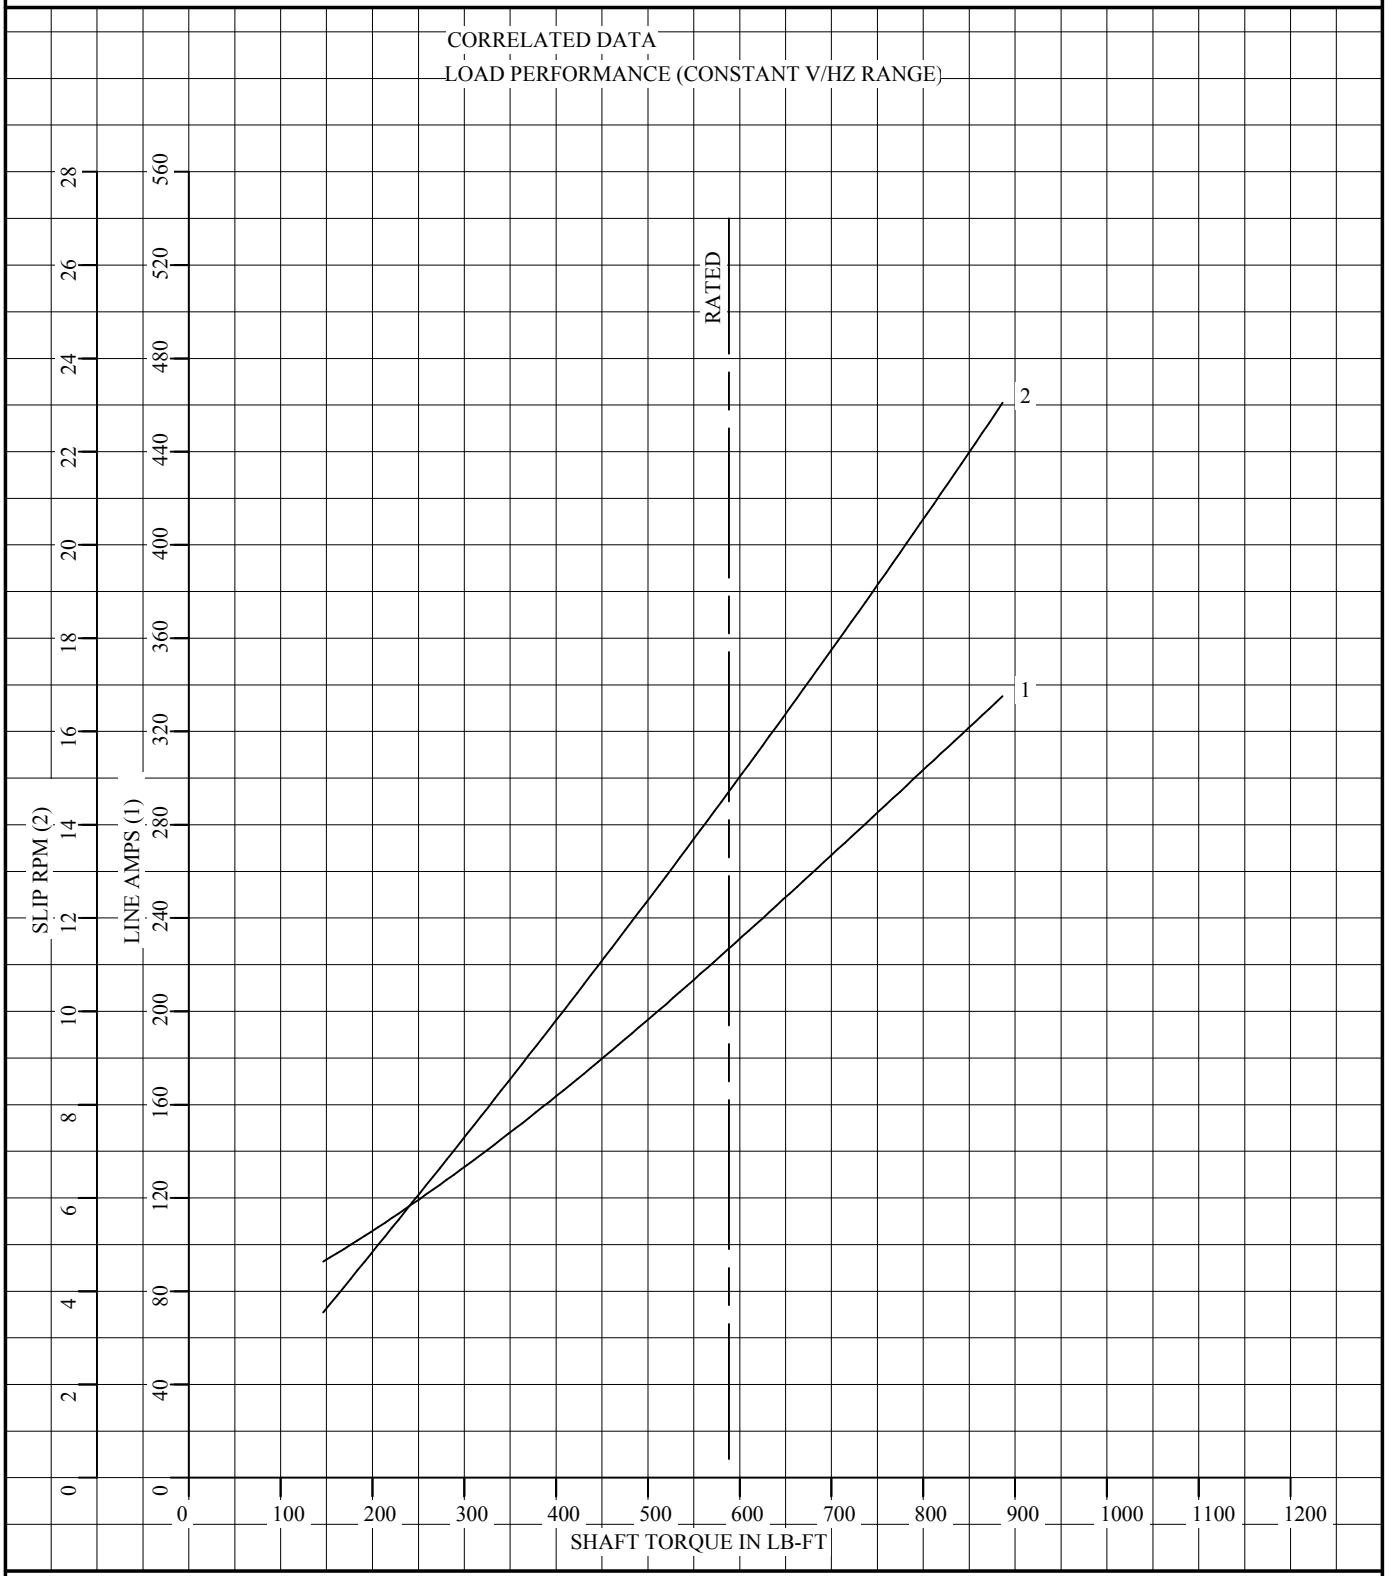

REMARKS: TYPICAL DATA
DATA VALID FOR NAMEPLATE SPEED RANGE ONLY

BALDOR
A MEMBER OF THE ABB GROUP

DR. BY	MJM
CK. BY	MJM
APP. BY	MJM
DATE	04-6-92

A-C MOTOR PERFORMANCE CURVES

L0116A
SH 2 OF 2
ISSUE DATE 11-8-12

VARIABLE SPEED ALTERNATING CURRENT MOTORS
RPM AC

ENCLOSURE: TOTALLY ENCLOSED
MOUNTING:FOOT

COOLING: FAN COOLED
BLOWER COOLED
AIR-OVER INLINE

FRAMES L3281 THRU UL4046

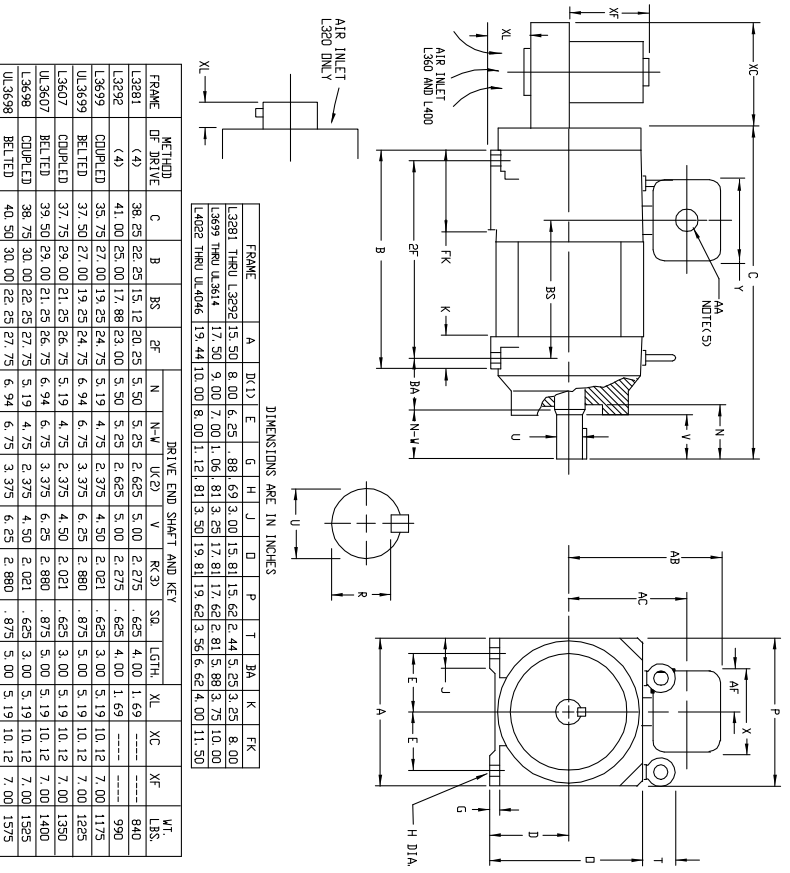

DIMENSIONS ARE IN INCHES

FRAME	A	BK(1)	E	G	H	J	D	P	T	BA	K	FK
L3281 THRU L3292	15.50	8.00	6.25	.88	.69	3.00	15.81	15.62	2.44	5.25	3.25	8.00
L3699 THRU UL3614	17.50	9.00	7.00	1.06	.81	3.25	17.81	17.62	2.81	5.88	3.75	10.00
L4022 THRU UL4046	19.44	10.00	8.00	1.12	.81	3.50	19.81	19.62	3.56	6.62	4.00	11.50

FRAME	METHOD OF DRIVE	C	B	BS	2F	DRIVE END SHAFT AND KEY N	N-W	U(2)	V	RK(3)	SQ.	LGTH.	XL	XC	XF	WT. LBS.
L3281		38.25	22.25	15.12	20.25	5.50	5.25	2.625	5.00	2.275	.625	4.00	1.69	----	----	840
L3292	(4)	41.00	25.00	17.88	23.00	5.50	5.25	2.625	5.00	2.275	.625	4.00	1.69	----	----	990
L3699	COUPLED	35.75	27.00	19.25	24.75	5.19	4.75	2.375	4.50	2.021	.625	3.00	5.19	10.12	7.00	1175
UL3699	BELTED	37.50	27.00	19.25	24.75	6.94	6.75	3.375	6.25	2.880	.875	5.00	5.19	10.12	7.00	1225
L3607	COUPLED	37.75	29.00	21.25	26.75	5.19	4.75	2.375	4.50	2.021	.625	3.00	5.19	10.12	7.00	1350
UL3607	BELTED	39.50	29.00	21.25	26.75	6.94	6.75	3.375	6.25	2.880	.875	5.00	5.19	10.12	7.00	1400
L3698	COUPLED	38.75	30.00	22.25	27.75	5.19	4.75	2.375	4.50	2.021	.625	3.00	5.19	10.12	7.00	1525
UL3698	BELTED	40.50	30.00	22.25	27.75	6.94	6.75	3.375	6.25	2.880	.875	5.00	5.19	10.12	7.00	1575
L3614	COUPLED	42.75	34.00	26.25	31.75	5.19	4.75	2.375	4.50	2.021	.625	3.00	5.19	10.12	7.00	1700
UL3614	BELTED	44.50	34.00	26.25	31.75	6.94	6.75	3.375	6.25	2.880	.875	5.00	5.19	10.12	7.00	1750
L4022	COUPLED	42.12	33.00	24.38	30.50	4.56	4.75	2.375	4.50	2.021	.625	3.00	5.69	12.00	10.31	1750
UL4022	BELTED	45.88	33.00	24.38	30.50	8.31	8.50	3.875	8.25	3.309	1.00	6.88	5.69	12.00	10.31	1800
L4034	COUPLED	45.12	36.00	27.38	33.50	4.56	4.75	2.375	4.50	2.021	.625	3.00	5.69	12.00	10.31	2150
UL4034	BELTED	48.88	36.00	27.38	33.50	8.31	8.50	3.875	8.25	3.309	1.00	6.88	5.69	12.00	10.31	2200
L4046	COUPLED	48.12	39.00	30.38	36.50	4.56	4.75	2.375	4.50	2.021	.625	3.00	5.69	12.00	10.31	2450
UL4046	BELTED	51.88	39.00	30.38	36.50	8.31	8.50	3.875	8.25	3.309	1.00	6.88	5.69	12.00	10.31	2500

(1) "BF" DIMENSION WILL NOT BE EXCEEDED. SHIMS UP TO .03 INCHES IN THICKNESS ARE USUALLY REQUIRED FOR COUPLED OR GEARED MACHINES.
(2) "U" VARIES +.000 -.015
(3) "RK" VARIES -.000 +.015
(4) METHOD OF DRIVE: COUPLED OR BELTED
(5) FOR TERMINAL BOX DIMENSIONS AA, AB, AC, AF, X & Y REFER TO BOX D/S (STD. 609979-1,X/P 609979-9,MILL 609979-10).
(6) BLOWER ASSEMBLY FOR BLOWER COOLING ONLY.

WALLS OR OBSTRUCTIONS MUST NOT ENCROACH ON AIR INLET SPACE "XL" FOR BLOWER OR FAN COOLING.
TERMINAL BOX CAN BE ROTATED IN 90 DEG. INCREMENTS.
TERMINAL BOX MOUNTED ON TOP AS STANDARD.
TERMINAL BOX CAN BE LOCATED ON SIDE IN F1 OR F2 POSITION WHEN SPECIFIED.
MOTOR WEIGHT MAY VARY FOR NON-STANDARD RATINGS AND/OR ACCESSORIES.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.

FRAME- _____ TYPE- _____ CERTIFIED FOR- _____ RPM- _____ PH- _____ HZ- _____ VOLTS _____
ORDER- _____ ITEM _____ HP- _____
SALES ORDER- _____ APPROVED BY- _____ DATE- _____

609994-001

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ASSIGNED TO BUSLOAD		
REV. LTR: –	VERSION: 00	TDR: 000000486619
FILE: \RGG\00003\660	REVISED: 10:17:16 01/08/2009	BY: CONBAT
MTL: –		

Baldor • Dodge • Reliance

DIM SHT L3281 THRU UL4046 RPM AC TEFC & BC AO INLINE FT MTG
SH 1 of 1

616779-001

RPM AC INDUSTRIAL ALTERNATING CURRENT MOTORS

STEEL, CAST IRON, MILL AND TERMINAL BOARD CONDUIT BOX DIMENSIONS

NEMA FRAMES L180 thru L440 and IEC FRAMES DL112 thru DL280



L180 FRAME
TERMINAL BOX ONLY AVAILABLE ON TOP

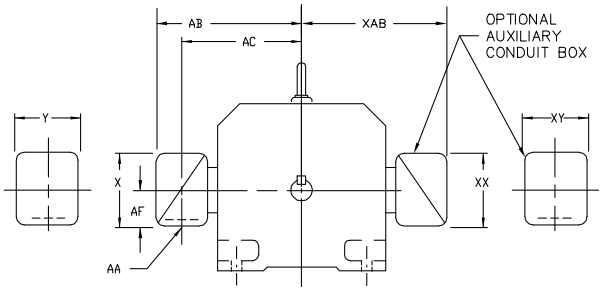

L210 THRU L440

DIMENSIONS ARE IN INCHES (mm)

STEEL TERMINAL BOX DIMENSIONS (MAXIMUM)

FRAME SIZE	MAX. AMPS	STANDARD SIZE AA(1)	AB	AC	AF	X	Y	PART NUMBER
L180	40	1.38	8.62	6.94	2.25	4.50	5.00	706320-3-A
L180	75	2	9.38	7.50	2.81	5.62	6.12	706320-5-A
L210	160	2	12.75	9.19	4.25	8.44	7.25	706320-9-A & D
L210	305	4	14.62	10.50	5.38	10.56	9.00	706320-16-A & D
L210	500	5	18.38	13.25	6.50	12.10	14.62	702658-1-C
L250	160	2	13.75	10.25	4.25	8.44	7.25	706320-9-A & D
L250	305	4	15.75	11.56	5.38	10.56	9.00	706320-16-A & D
L250	500	5	19.50	14.31	6.50	12.10	14.62	702658-1-C
L280	160	2	14.00	10.44	4.25	8.44	7.25	706320-9-A & D
L280	305	4	15.88	11.75	5.38	10.56	9.00	706320-16-A & D
L280	500	5	19.62	14.50	6.50	12.10	14.62	702658-1-C
L320	160	2	15.38	11.81	4.25	8.44	7.25	706320-9-A & D
L320	305	4	17.25	13.12	5.38	10.56	9.00	706320-16-A & D
L320	500	5	21.00	15.88	6.50	12.10	14.62	702658-1-C
L360	160	2	16.38	12.81	4.25	8.44	7.25	706320-9-A & D
L360	305	4	18.25	14.12	5.38	10.56	9.00	706320-16-A & D
L360	500	5	22.00	16.88	6.50	12.10	14.62	702658-1-C

CAST IRON TERMINAL BOX DIMENSIONS (MAXIMUM)

FRAME SIZE	MAX. AMPS	STANDARD SIZE AA(2)	AB	AC	AF	X	Y	PART NUMBER
L180	60	1	9.38	7.50	2.50	5.00	5.75	706320-4-C
L210	140	3	14.25	10.50	3.62	8.00	9.25	706320-12-B
L210	210	4	15.62	11.38	4.12	9.50	10.50	706320-13-A
L210	510	5	18.50	13.25	7.00	12.75	15.00	706320-14-D
L250	140	3	15.38	11.50	3.62	8.00	9.25	706320-12-B
L250	210	4	16.62	12.44	4.12	9.50	10.50	706320-13-A
L250	510	5	19.62	14.31	7.00	12.75	15.00	706320-14-D
L280	140	3	15.50	11.75	3.62	8.00	9.25	706320-12-B
L280	210	4	16.88	12.62	4.12	9.50	10.50	706320-13-A
L280	510	5	19.75	14.50	7.00	12.75	15.00	706320-14-D
L320	140	3	15.75	12.00	3.62	8.00	9.25	706320-12-B
L320	210	4	17.12	12.88	4.12	9.50	10.50	706320-13-A
L320	510	5	21.12	15.88	7.00	12.75	15.00	706320-14-D
L360	140	3	16.75	13.00	3.62	8.00	9.25	706320-12-B
L360	210	4	18.12	13.88	4.12	9.50	10.50	706320-13-A
L360	510	5	22.12	16.88	7.00	12.75	15.00	706320-14-D

MILL CONDUIT BOX DIMENSIONS (MAXIMUM)

FRAME SIZE	AMPS	AA	AB	AC	AF	X	Y	PART NUMBER
L210	160	(3)	10.78	8.41	3.50	8.00	8.00	706310-3-X or Y
L250	160	(3)	11.84	9.47	3.50	8.00	8.00	706310-3-X or Y
L280	160	(3)	12.75	10.75	3.50	8.00	8.00	706310-3-X or Y
	590	(3)	14.75	11.34	4.50	16.00	16.00	706310-3-R
L320	590	(3)	15.47	12.06	4.50	16.00	16.00	706310-3-R
L360	590	(3)	16.47	13.06	4.50	16.00	16.00	706310-3-R
L400	590	(3)	18.00	15.00	4.50	16.00	16.00	706310-3-R
L440	1260	(3)	27.38	19.88	6.06	18.50	18.50	706310-63-E

IEC CONDUIT BOX DIMENSIONS WITH TERMINAL BOARDS (MAXIMUM)

FRAME NEMA/IEC	AMPS	AA	AB (mm)	AC (mm)	AF (mm)	X (mm)	Y (mm)	PART NUMBER	PART NUMBER
L180/DL112	85	(4)	9.38(239)	7.50 (191)	2.81 (72)	5.62 (143)	6.12 (156)	706320-5-A or 4-C	706320-5-A or 4-C
L210/DL132	100	--	10.77 (274)	9.04 (230)	3.74 (95)	7.48 (190)	7.48 (190)	706310-56-A	706310-225-R
	160	--	11.63 (296)	9.62 (245)	4.41 (112)	8.82 (224)	8.82 (224)	706310-56-B	706310-226-R
L250/DL160	100	--	12.09 (307)	10.36 (264)	3.74 (95)	7.48 (190)	7.48 (190)	706310-56-A	706310-225-R
	160	--	12.95 (329)	10.94 (278)	4.41 (112)	8.82 (224)	8.82 (224)	706310-56-B	706310-226-R
L280/DL180	160	--	13.58 (345)	11.57 (294)	4.41(112)	8.82 (224)	8.82 (224)	706310-56-B	706310-226-R
	400	--	19.09 (485)	14.37 (365)	6.20 (158)	14.39 (366)	14.39 (366)	706310-63-B	706310-63-B
L320/DL200	800	--	20.06 (510)	17.53 (446)	6.20 (158)	14.39 (366)	14.39 (366)	706310-63-B	706310-63-B
L360/DL225	800	--	20.78 (528)	18.25 (464)	6.20 (158)	14.39 (366)	14.39 (366)	706310-63-B	706310-63-B
L400/DL250	800	--	21.75 (553)	19.25 (489)	6.20 (158)	14.39 (366)	14.39 (366)	706310-63-B	706310-63-B
L400/DL250	1260	--	25.94 (659)	18.44 (468)	6.06 (154)	18.50 (470)	18.50 (470)	706310-63-E	706310-63-E
L440/DL280	1260	--	27.38 (696)	19.88 (505)	6.06 (154)	18.50 (470)	18.50 (470)	706310-63-E	706310-63-E
L440/DL280	1300	--	30.38 (772)	21.38 (543)	12.44 (316)	24.00 (610)	24.00 (610)	706310-360-A	706310-360-A

OPTIONAL AUXILIARY CONDUIT BOX DIMENSIONS (MAXIMUM)

FRAME SIZE	XAB	XX	XY	PART NUMBER	FRAME SIZE	XAB	XX	XY	PART NUMBER
L210/DL132	7.38	4.25	4.25	602007-26-A	L210/DL132	10.88	8.00	8.00	706310-3-B
L250/DL160	8.44	4.25	4.25	602007-26-A	L250/DL160	11.88	8.00	8.00	706310-3-B
L280/DL180	9.12	4.25	4.25	602007-26-A	L280/DL180	12.62	8.00	8.00	706310-3-B
L320/DL200	10.00	4.25	4.25	602007-26-A	L320/DL200	13.50	8.00	8.00	706310-3-B
L360/DL225	11.00	4.25	4.25	602007-26-A	L360/DL225	14.50	8.00	8.00	706310-3-B
L400/DL250	12.00	4.25	4.25	602007-26-A	L400/DL250	15.50	8.00	8.00	706310-3-B
L440/DL280	13.12	4.25	4.25	602007-26-A	L440/DL280	16.62	8.00	8.00	706310-3-B

(1) "AA" CONDUIT.
(2) "AA" PIPE TAP.
(3) CUSTOMER TO PROVIDE HOLE FOR CONDUIT.
(4) 2" DN -5A or 1" TAP DN -4C

CONDUIT BOX CAN BE ROTATED 360°. CONDUIT BOX MAY BE LOCATED F1,F2 OR F3 AS SPECIFIED

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADD 1260 AMP L400, ADD 1300 AMP L440
REV. LTR: A
FILE: \RGV\00003\688
MTL: -
VERSION: 01
REVISED: 10:23:58 06/18/2013
TDR: 000000804459
BY: RGGWT

BALDOR

DIM SHT NEMA L180 THRU L440 & IEC DL112 THRU DL280
SH 1 of 1

616779-001

616779-010

RPM AC TACHOMETER DIMENSIONS

NEMA FRAMES L180 THRU L440

DIMENSIONS ARE IN INCHES

DPFV,DPSV,TEPV,TESV AND L180 & L440 TENV, TEAO-PB & TEFC

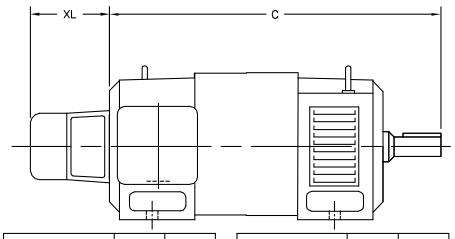

TACH MODEL	XL	LBS.
M627, M628 M727, M737 M738	10.31	20
H25D (S CONN)	6.31	10
H25D (E CONN)	9.06	10
TS-2014N	5.62	10
TS-2087N	9.94	15
RIM8500	4.00	15
RL67	2.00	5
845H	6.27	10
H20	7.38	10
BEI	9.25	10
M3, M4	3.62	10
M285	3.38	10
M485	8.50	15
SL85	2.19	10
HS35 OR HSD35	2.50	5
SL56	3.00	5
H56	9.50	10
E25BA	2.75	10
AVTRON AV850	2.54	9
DYNAPAR EN42	3.32	6.5
DYNAPAR HS35R	3.30	2.0
AVTRON AV485	11.00	17.00
RAH35M	4.19	5.00

TACH MODEL	XL	LBS.
TAMAGAWA TS5778	6.5	5
X25	10.50	10
H38D	10.25	10
STEGMANN	2.81	5
RIM1250	4.75	80
RIM6200	9.62	25
SRM25	6.28	10
HS20, HSD35	3.30	2
TS5016N	4.25	15
HS56	3.62	10
AV85	2.19	10
RAHS35M	4.19	10
M3-56C	7.38	15
EQN1325	6.50	15
EQN425	5.50	15
RQD486	3.25	10
HD25	5.62	10
AVTRON AV67	4.89	5
AV56	2.00	5
HSD38	3.00	5
SFS/SFM60	3.00	5
HS45	3.12	10
SFS/SFM50	4.00	10

SEE MOTOR DIMENSION SHEET FOR "C" DIMENSION

TENV,TEAO-PB (EXCEPT L180 & L440)



TACH MODEL	XL MAX.	LBS.
TS-5008N TS-5013N TS-5016N TS-5035N	5.88	10
TS-2014N	4.31	20
TS-2087N	8.62	15
RD-120	.38	5
625/845H	6.50	10
RD-62	8.25	10
TS-2151	1.88	5
H20	5.88	10
RL67	1.56	5
RIM 8500	3.50	20
SL-56	3.06	5
M285	3.50	20
H56	8.12	10
HS35 OR HSD35	1.00	5
M3, M4	2.50	10
SL85	1.38	15
M4D 56C-MTG	7.50	10
M485	7.12	15
AVTRON AV850	2.54	9
RAH35M	3.56	5

TACH MODEL	XL MAX.	LBS.
RA35	2.25	10

SEE MOTOR DIMENSION SHEET FOR "C" DIMENSION

TEAO-BC

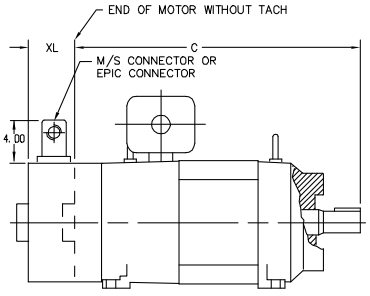

FIG. 1

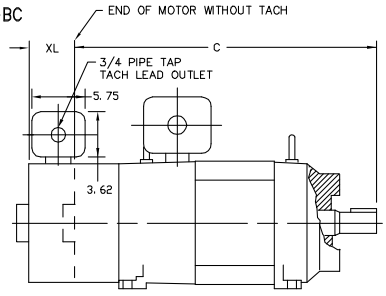

FIG. 2

TACH MODEL	STANDARD CONNECTION PER	LBS.	X/T CONNECTION PER	LBS.	XL PER FRAME SIZE						
					L180	L210	L250	L280	L320	L360	L400
TS-5008N TS-5013N TS-5016N TS-5035N	FIG. 1	15	FIG. 2	20	4.00	6.12	5.12	5.12	0	4.00	7.00
TS-2014N/845H	FIG. 1	20	FIG. 2	25	4.00	6.12	5.12	5.12	0	4.00	7.00
TS-2151	FIG. 1	10	FIG. 2	10	4.00	6.12	5.12	5.12	0	4.00	7.00
H20	FIG. 1	10	FIG. 2	15	4.00	4.12	3.12	3.12	0	4.00	7.00
RL67	FIG. 1	10	FIG. 1	10	4.00	4.12	3.12	3.12	0	4.00	7.00
SL-56	FIG. 1	10	FIG. 1	10	4.00	4.12	3.12	3.12	0	4.00	7.00
HS35, HSD35, HSD38	FIG. 1	10	FIG. 2	15	4.00	4.12	3.12	3.12	0	4.00	7.00
AVTRON M3-HS	FIG. 1	10	FIG. 2	15	4.00	4.12	3.12	3.12	0	4.00	7.00
AVTRON AV56	FIG. 1	10	FIG. 2	15	4.00	4.12	3.12	3.12	0	4.00	7.00
AVTRON HS45	FIG. 1	10	FIG. 2	15	4.00	4.12	3.12	3.12	0	4.00	7.00

SEE MOTOR DIMENSION SHEET FOR "C" DIMENSION

616779-010

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADD AVTRON HS45 TO TEAO-BE (B365302)		TDR: 000000873222
REV. LTR: T	VERSION: 18	
FILE: \RGG\000003\689	REVISED: 11:32:55 09/25/2014	BY: RGGWT
MTL: -		

BALDOR

DIM SHT TACH DIM NEMA L180 THRU L440

SH 1 of 1

422927–001

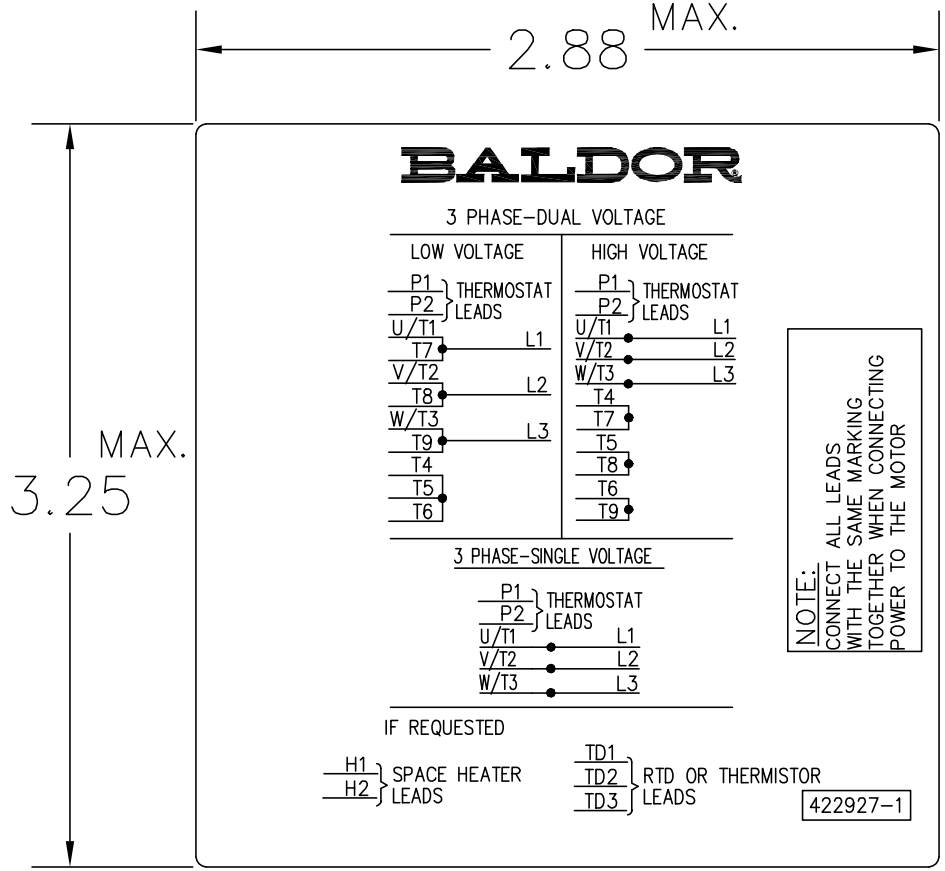

NOTE:
DATA TO BE SIZED SO THAT IT FITS INTO MATERIAL DECAL DIMENSIONS. MAKE LETTERS & NUMBERS AS LARGE AS POSIBLE.

MATERIAL: CERAMATIC DGF–P4
PERMA GRIP ADHESIVE

ALL LETTERS, NUMBERS AND LINES TO BE BLACK ON WHITE BACKGROUND.

422927–001

REV. DESC: CHANGE BACKGROUND COLOR FROM GOLD TO WHITE			BALDOR
REV. LTR: B	VERSION: 02	TDR: 000000788708	
FILE: \RGG\00000\203		REVISED: 08:09:29 03/04/2013	EXTERNAL CONNECTION LABEL
MTL: –		BY: RGGWT	SH 1 of 1