



Customer information packet

ZDM2333T

15HP, 1765RPM, 3PH, 60HZ, 256TC, 0944M, TEBC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEBC
Frame	256TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	BLOWER
Current @ Voltage	18.100 A @ 460.0 V 36.200 A @ 230.0 V 38.000 A @ 208.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	ENCODER
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	18.1 a

Part detail

Revision	F
Type	AC
Mech. spec.	09T110
Base	
Status	PRD/A
Elec. spec.	09WGT597
Layout	09LYT110
Eff. date	11-14-2023
CD Diagram	CD0005
Poles	04
Leads	9#12
Proprietary	False
Created date	02-02-2021

Insulation Class	H
Inverter Code	Inverter Duty
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5000 rpm
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0944M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	29.41 IN
Power Factor	83
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1765 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1168L					
CAT NO	ZDM2333T				
SPEC.	09T110T597Z1				
FRAME	256TC	HP	15 TE		
VOLTS	230/460				
MAG CUR	14.6/7.3	FLA	36.2/18.1		
RPM	1765	RPM MAX	5000		
HZ	60	PH	3	CLASS	H
SER.F.	1.00	DES	A	SL HZ	1.2
NEMA-NOM-EFF	92.4	WK2	1.93		
BLWR V	PH	HZ	A		
RATING	40C AMB-CONT				
DE BRG	6309	ODE BRG	6208		
CC	010A	SER.NO			

AC Induction Motor Performance Data

Record # 86510

Preliminary Data Sheet

Winding: 09WGT597-R005		Type: 0944M	Enclosure: TEBC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	15	Full Load Torque	44.5 LB-FT	
Volts	230/460	Start Configuration	direct on line	
Full Load Amps	36.2/18.1	Breakdown Torque	154 LB-FT	
R.P.M.	1765	Pull-up Torque	67.2 LB-FT	
Hz	60 Phase	Locked-rotor Torque	83.5 LB-FT	
NEMA Design Code	A KVA Code	Starting Current	129 A	
Service Factor (S.F.)	1	No-load Current	7.32 A	
NEMA Nom. Eff.	92.4 Power Factor	Line-line Res. @ 25°C	0.61 Ω	
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	52°C	
		Locked-rotor Power Factor	38.1	
		Rotor inertia	1.92 lb-ft ²	

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	48	69	79	84	86	87
Efficiency	88	92.1	92.7	92.5	91.7	90.7
Speed	1792	1785	1777	1768	1759	1749
Line amperes	8.45	11	14.3	18.1	22.2	26.7


ABB Motors and Mechanical Inc.

WINDING # 09WGT597


15 HP 3 PH 60 HZ 1765 RPM 460 V 0944M

Typical performance - not guaranteed values.


TORQUES (LB-FT): PO=154 PU=67.2 LR=83.5 LRA=129

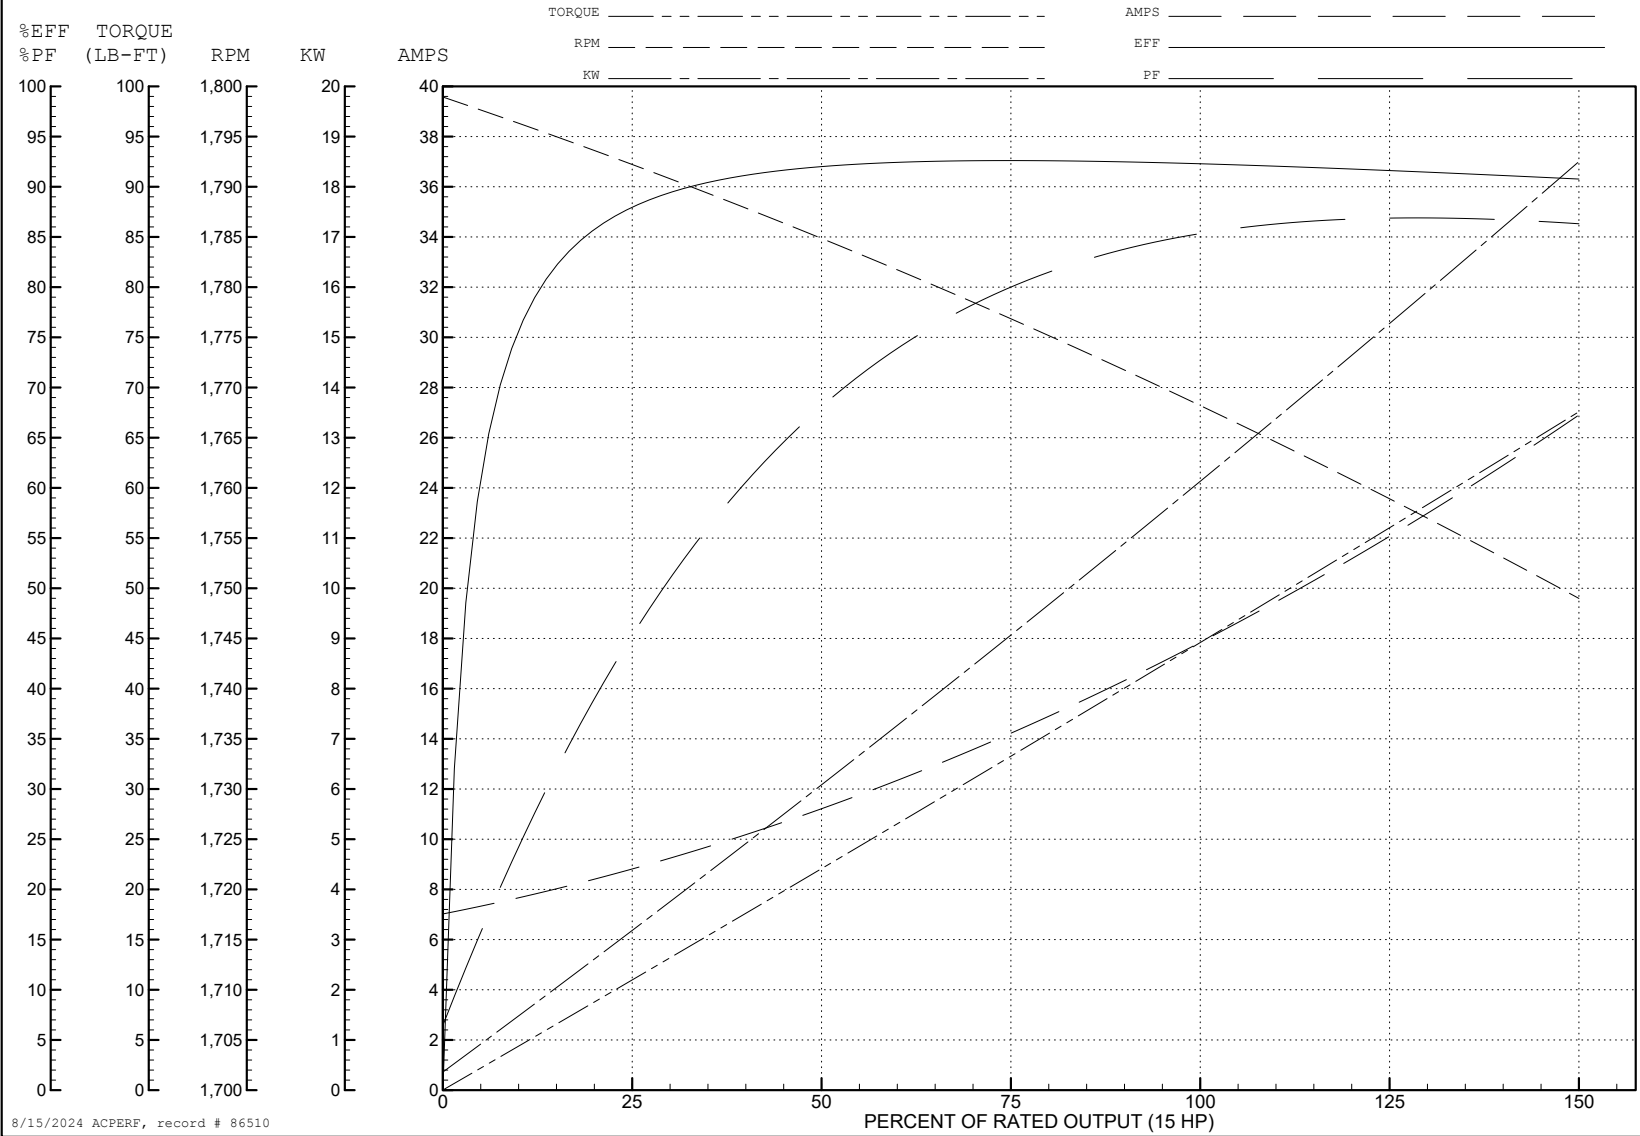

8/15/2024 ACPERF, record # 86510

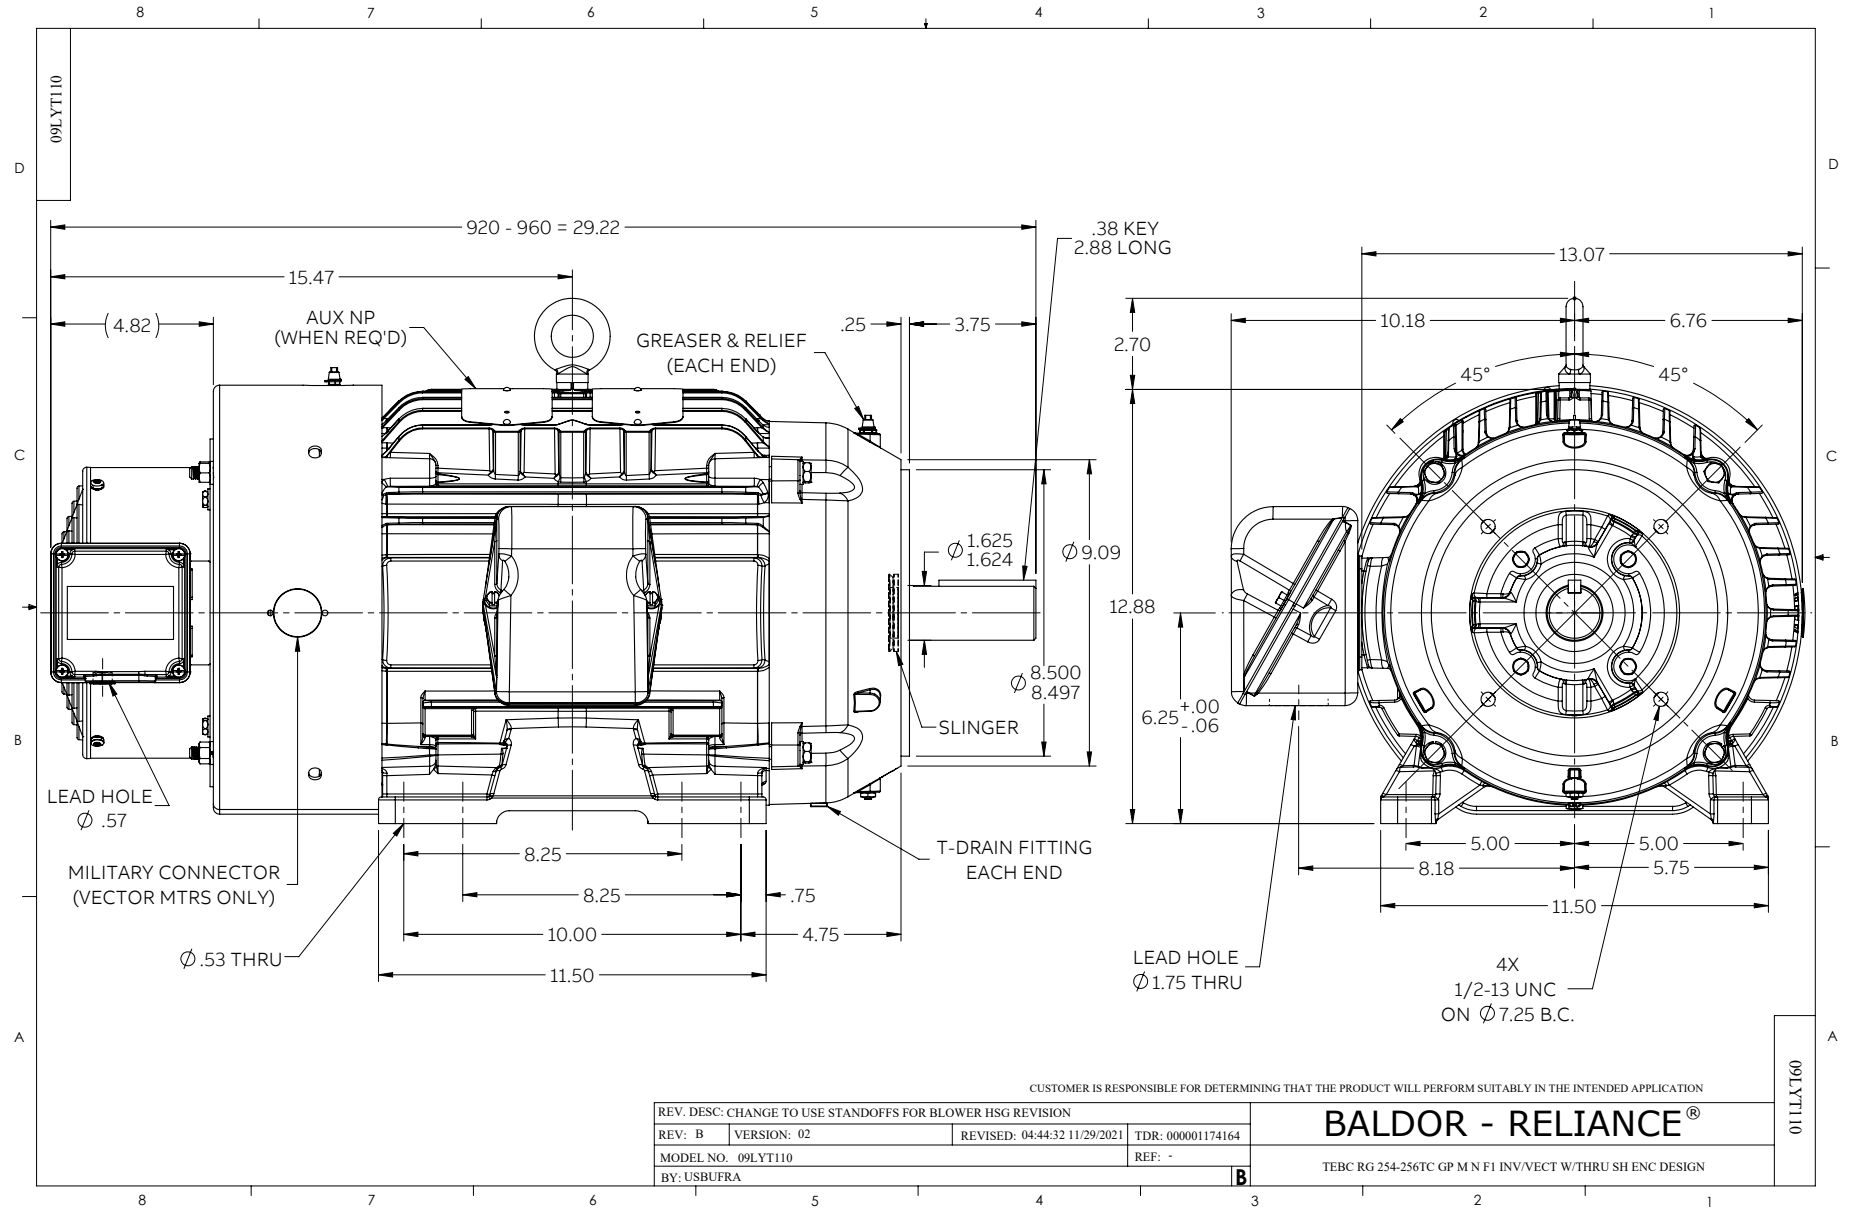

CD0005

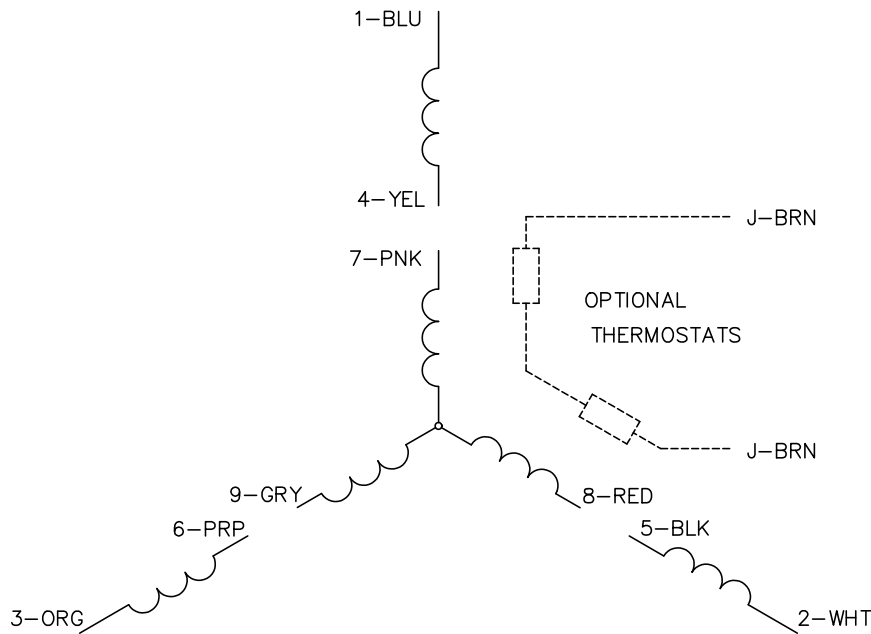


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)

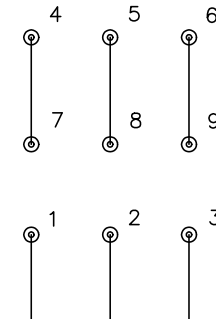

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS