

Baldor•Dodge Quantis: Separate & 3-Piece Coupled Input Bearing Grease Procedure

C.O. Engineering - Gearing
October 21, 2015

Select sizes of Quantis separate and 3-piece coupled input assemblies feature grease fittings for lubricating the spherical roller bearing located on the input shaft. For bearings that require grease lubrication, re-lubricate the affected bearings every year, or every 2000 operating hours, whichever comes first. Use a grease with a lithium complex thickener and ISO 220 viscosity mineral oil base lubricant. Use 15 pumps of grease for the first re-greasing and 5 pumps of grease for subsequent re-greasing.

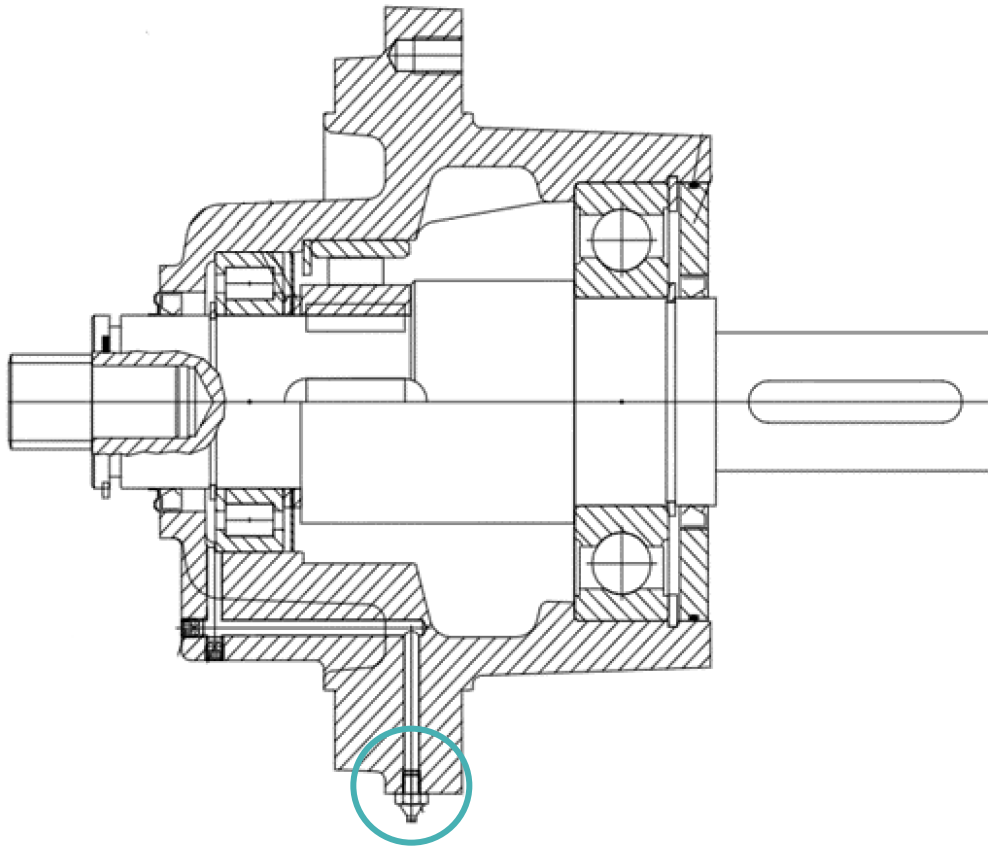


Figure 1: Typical location of fitting on greased input assemblies