

# Generator Stock Products Catalog

**BALDOR**

CA2400R

Effective Date:  
August 7, 2006

- Portables
- Towables
- Light Towers
- Mod Express™



**Rental & Construction Industry**

**BALDOR®**

$$V_p = \frac{Q_p \times S_p}{C \times T}$$

Much of Baldor's success can be contributed to a simple formula – *The Value Formula*. The value formula means that Value, as perceived by the customer, is derived from Quality (perceived) times Service (perceived) divided by Cost and Time. The goal is to increase Quality and Service and reduce Cost and Time. Baldor increases Value by

listening to the customer and manufacturing the best products in the industry. This approach has made Baldor Generators some of the most reliable products in today's market.

## BALDOR GENERATORS OWNER WARRANTY POLICY

### LIMITED WARRANTY

Baldor will replace or repair free of charge any part or parts of the generator of their manufacture that are defective in workmanship and materials for a period of time as set forth in the Warranty Period chart below. All Baldor products requiring warranty service shall be transported or shipped freight pre-paid to a Baldor Generator repair facility. Notification of the defect or problem, a description of the manner in which the Baldor generator is used, and the name, address and telephone number of the customer requiring warranty service must be included. Baldor is not responsible for removal and shipment of the Baldor product to the service center or for the reinstallation of the Baldor product upon its return to the customer, or any incidental or consequential damages resulting from the defect, removal, reinstallation, shipment or otherwise. Problems with Baldor products can be due to improper maintenance, faulty installation, non-Baldor additions or modifications, or other problems not due to defects in Baldor workmanship or materials. If a Baldor Generator repair facility determines that the problem with a Baldor product is not due to defects in Baldor workmanship or materials, then the customer will be responsible for the cost of any necessary repairs. Genset engines are covered under the engine manufacturers warranty. Proper engine maintenance is required. Any request for engine warranty or repair should be made directly with the engine manufacturers warranty center. See engine manufacturers data for applicable engine warranty periods and location of repair centers. This Limited Warranty and Service Policy represents Baldor's sole and exclusive warranty obligation with respect to Baldor products. Baldor's liability to a customer or any other person shall not exceed Baldor's sales price of the applicable Baldor product. **BALDOR DISCLAIMS ALL OTHER EXPRESSED AND IMPLIED WARRANTIES INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY.**

### WARRANTY PERIOD

Generator Series	Labor*	Parts
Portable Products (Premier, Powerchief, DG Series)	1 Year	3 Years
Towable Products (TS)	1 Year or 3,000 Hours	3 Years or 3,000 Hours
POW'R LITE Light Towers	1 Year or 3,000 Hours	3 Years or 3,000 Hours <i>Light Fixture, Lamps and Ballasts are excluded from any warranty coverage</i>
International	1 Year or 1,000 Hours	1 Year or 1,000 Hours

\*For products covered under labor coverage, travel expenses will be allowed up to 7 hours straight labor or 300 miles, whichever occurs first, and only applies to permanently wired and mounted products (AE, DLC, GLC, IDLC).

You must save the purchase receipt. Proof of purchase, date, serial number and model number will be required for all portable and Towable products to qualify for any warranty consideration.

A start-up inspection form/warranty registration must be completed in its entirety and submitted to Baldor Generators within 30 days of start-up to qualify for any warranty consideration, excluding: Portables, Towables and Light Towers.

### GENERATOR FREIGHT POLICY

Shipments of stock products shown in this catalog are made with the selling terms of F.O.B. factory, Fort Smith Distribution Center, or a Baldor District Warehouse. International Shipments – Ex Works. Non-stock items – FOB Factory. Baldor will prepay and absorb freight charges, on a carrier chosen by Baldor, to the first destination in the continental United States or Canada on shipments of: 1000 lbs. or more of Portable Gensets; 4 or more Towable Gensets TS25 – TS175; 10 or more POW'R LITE Light Towers. Prepaid freight does not include customs fees or taxes. Exceptions may apply on shipments of certain stock products including those not listed above. Contact your Baldor District Office for these exceptions.

# A New Concept in Generator Power

## MOD EXPRESS™!

See page 12



Now you can buy a Baldor Towable genset and have several more choices and faster delivery. The modular nature of the generator Mod Express™ System means you can more or less design your own genset, with the features you want, and there is considerable field upgrade potential.

### Towable Mod Express™ factory installed options include:

- G3-Install battery heater
- G4-Install battery charger
- G7-Modify power connections
- G8-Convert standard trailer hitch coupling to ball hitch or pintle hitch
- G9-Change trailer brakes from hydraulic to electric
- G10-Install engine block heater to standard genset
- G11-Install electronic governor to standard genset



*Baldor TS130T used on a Gantry Crane.*



*Baldor TS25T providing power for framers and roofers at a new construction site.*



*Baldor TS175T used in a load-shedding application. The 100 ton air conditioning unit is taken off the utility grid during peak consumption and switched to the genset.*

Baldor has always led the field for easy conversion of stock motor products, even in the sixties Baldor was using a Mod Express™ system to create more value for customers who needed a quick electric motor delivery. Many years of experience and innovation gives Baldor incomparable design expertise in providing product combinations for a distinctive and fully rounded generator product line.

***Baldor's new generator Mod Express™ System delivers more value for customers who need a standby or portable power source!***

**BALDOR**

# Premier Industrial Portable Generators (Full Featured)



OHV30



OHV85E

## Applications

Baldor portable generators are designed to meet your demands when dependable portable power is required. The performance and durability of Baldor portables have made them the generator of choice for industrial and rental/construction applications.

## Features

Baldor portable generators are equipped with industrial grade engines to provide the performance and dependability you can count on. Baldor manufactures it's own generators and backs them with an industry leading 3-year limited warranty. Baldor portable generators also feature Switchless Full Pow'R, eliminating the need for a Full Power switch. Automatically get the 120V or 240V nameplate power rating without having to flip a switch.

Baldor Premier portable generators incorporate the features you've come to expect from the leader in portable power generation.

- Switchless Full Power
- Automatic Idler System
- Focal Vibration System
- Low Oil Shutdown
- Spark Arrestor Muffler
- Tubular Roll Cage
- 3-Year Warranty
- Voltmeter
- Fuel Gauge
- AC Circuit Breakers
- Hour Meter
- Extended Run Fuel Tank
- Neoprene Isolators

## Premier (Full Featured)

Catalog Number	Max. Watts	Cont. Watts	Fuel Capacity	Engine	Engine Hp	Volts	List Price	Mult. Sym.	Approx. Shpg. Wgt. (lbs)
OHV30	3000	2500	2.8 Gal.	Honda	5.5	120 VAC	\$1535	PG	121
OHV40	4000	3500	4.6 Gal.	Honda	8.0	120/240 VAC	2181	PG	193
OHV50H	5000	4000	4.6 Gal.	Honda	9.0	120/240 VAC	2380	PG	193
OHV60	6000	5000	4.6 Gal.	Honda	11.0	120/240 VAC	2807	PG	218
OHV60E ①	6000	5000	4.6 Gal.	Honda	11.0	120/240 VAC	3270	PG	230
OHV85E ①	9000	8000	5.8 Gal.	Vanguard	16.0	120/240 VAC	3697	PG	255
OHV100E ①	10500	9500	5.8 Gal.	Vanguard	18.0	120/240 VAC	6209	PG	324
OHV110E ①	11000	10000	5.8 Gal.	Honda	20.0	120/240 VAC	6914	PG	348

**NOTE:** OHV60E, OHV85E, OHV100E have electric start and recoil start. OHV110E is electrical start only.

① Batteries are not included on any Electric Start Models.

Baldor reserves the right to implement specification or design changes without notice.

**WARNING:** Do not connect generator to any building's electrical system unless a disconnect switch has been installed.

Follow local and national electrical codes for proper installation.

# Baldor Industrial Portable Generators

Premier Model	OHV30	OHV40	OHV50H	OHV60	OHV60E	OHV85E	OHV100E	OHV110E
<b>Features</b>								
Switchless Full Pow R	—	std	std	std	std	std	std	std
AC Voltmeter	—	std	std	std	std	std	std	std
Automatic Idler	—	std	std	std	std	std	std	std
Focal Vibration System	—	std	std	std	std	std	std	std
<b>Engine Model</b>								
	Honda	Honda	Honda	Honda	Honda	Vanguard	Vanguard	Honda
Horsepower	5.5	8.0	9.0	11	11	16	18	20
Cylinder	1	1	1	1	1	2	2	2
Lubrication System	Splash	Splash	Splash	Splash	Splash	Pressure	Pressure	Pressure
Displacement - CC	163	242	270	337	337	480	570	614
Starting Systems ①	Recoil	Recoil	Recoil	Recoil	12 Volt with Recoil	12 Volt with Recoil	12 Volt with Recoil	12 Volt
<b>Rating</b>								
Max Rating	3000W	4000W	5000W	6000W	6000W	9000W	10500W	11000W
Rated	2500W	3500W	4000W	5000W	5000W	8000W	9500W	10000W
Volts	120VAC	120/240VAC	120/240VAC	120/240VAC	120/240VAC	120/240VAC	120/240VAC	120/240VAC
Amps	20.8	29.2/14.6	33.3/16.7	41.6/20.8	41.6/20.8	66.7/33.4	79.2/39.6	83.3/41.6
dBA (Avg) @ 7 meters	70	73	73	72	72	75	75	78
<b>Receptacles</b>								
Straight(520R)120V,20A, Duplex	1	—	—	—	—	—	—	—
Straight(520R GFCI)120V, 20A, Duplex	1	2	2	2	2	2	2	2
Twist Lock(L530R)120V, 30A	—	1	1	1	1	1	1	1
Twist Lock(L1430R)120/240V, 30A	—	1	1	1	1	1	1	1
Twist Lock(CS6369)120/240V, 30A	—	—	—	—	—	—	1	1
<b>Fuel System</b>								
Fuel Capacity (U.S. Gallons)	2.8	4.6	4.6	4.6	4.4	5.8	5.8	5.8
Operation Run Time/Full Load	5 hrs.	5 hrs.	6 hrs.	4 hrs.	4 hrs.	4 hrs.	4 hrs.	4 hrs.
Operation Run Time/Half Load	8 hrs.	9 hrs.	10 hrs.	7 hrs.	7 hrs.	7 hrs.	6 hrs.	6 hrs.
<b>Dimensions</b>								
Length	25.5"	28"	28"	28"	28"	28"	30"	30"
Width	17.5"	20.5"	20.5"	20.5"	20.5"	21.5"	23"	23"
Height	18.0"	22.25"	22.25"	22.25"	22.25"	27.5"	28.5"	28.5"
Weight (Net Dry)	112 lbs	170 lbs	170 lbs	192 lbs	206 lbs	224 lbs	270 lbs	270 lbs

**NOTE:** ① Batteries are not included on any Electric Start Models. Baldor reserves the right to implement specifications or design changes without notice.

**WARNING:** Do not connect generator to any building's electrical system unless a disconnect switch has been installed.

Follow local and national electrical codes for proper installation.

## Options - Portables

Catalog Number	Description	Features	Available for Models	List Price	Mult. Sym.	Approx. Shp. Wgt.
PGD2	2 Wheel Dolly Kit	Two 10" Pneumatic Wheels, Fold Down Handles, Cable Storage Hanger, and Mounting Hardware	Premier, Powerchief and Diesel Models 4,000 to 9,000 Watt	\$223	G8	20
PGD4	4 Wheel Dolly Kit	Four 10" Pneumatic Wheels, Fold Down Handles, Cable Storage Hanger, and Mounting Hardware	Premier, Powerchief and Diesel Models 4,000 to 11,000 Watt	292	G8	26
GTK30A10	Manual Transfer Switch Kit - 10 Circuit	Indoor Rated Transfer Switch and 25' Generator Ext Cord with L1430 Conn. Transfer Switch Includes circuit breakers, 3 - 15A 1-Pole, 3 - 20A 1-Pole, 1 - 20A 2-Pole, 1 30A 2-Pole, 1 30A 2-Pole Generator Main and 1 60A 2-Pole Main.	Premier, Powerchief and Diesel Models 4,000 to 11,000 Watt	670	G8	37
GTK50A12	Manual Transfer Switch Kit - 12 Circuit	Indoor Rated Transfer Switch and 25' Generator Ext Cord with CS6364/5 Conn. Transfer Switch Includes circuit breakers, 3 - 15A 1-Pole, 3 - 20A 1-Pole, 1 - 20A 2-Pole, 1 30A 2-Pole, 1 50A 2-Pole Generator Main and 1 60A 2-Pole Main.	Premier, Models 10,000 to 11,000 Watt	905	G8	45
GTK30PBK	Power Inlet Box Kit	Outdoor Rated Power Inlet Box with 30 Amp L1430 Plug for connection to Generator Extension Cord. Includes Mating Plug for Transfer Switch connection.	GTK30A10 Transfer Switch	125	G8	4
GTK50PBK	Power Inlet Box Kit	Outdoor Rated Power Inlet Box with 50 Amp CS5365 Plug for connection to Generator Extension Cord. Includes Mating Plug for Transfer Switch connection.	GTK50A12 Transfer Switch	150	G8	5

# Baldor Powerchief® Series

When you need the dependability of a construction grade generator but could do without some of the frills, Powerchief generators are for you. Available in 1100 to 9000 watt models, the competitively priced Powerchief Series delivers performance and value found mostly on top-of-the-line generators. Add to this the quality of an ISO 9001 certified manufacturing plant and a 3 year product warranty and you'll agree the Powerchief Series is tough to beat.



PC60H

## Powerchief® Industrial Portable Generators (Maximum Value)

Baldor Generators are known for their quality and performance and the Powerchief® Series provides what you've come to expect in a maximum value generator. All Powerchief generators feature industrial grade engines, a Baldor generator with 3-year limited warranty, Switchless Full Pow'R and Focal Vibration System.

### Features:

- Powerchief generators with Switchless Full Pow'R do not need a power switch We're always full power!
- Plug in 120v or 240v in any combination.
- No need to change voltage settings.
- No need to worry about which cord is plugged in.
- Reduces the chance for generator damage.

Catalog Number	Max. Watts	Cont. Watts	Fuel Capacity	Engine	Engine Hp	Volts	List Price	Mult. Sym.	Approx. Shp. Wgt. (lbs)
PC11R	1100	900	4.2 Qt.	Robin	2.0	120 VAC/12 VDC	\$1054	PG	65
PC30H	3000	2500	3.8 Qt.	Honda	5.5	120 VAC	1345	PG	108
PC40H	4000	3500	4.6 Gal.	Honda	8.0	120/240 VAC	1743	PG	171
PC50H	5000	4000	4.6 Gal.	Honda	9.0	120/240 VAC	1965	PG	185
PC60H	6000	5000	4.6 Gal.	Honda	11.0	120/240 VAC	2179	PG	211
PC60HE ①	6000	5000	4.6 Gal.	Honda	11.0	120/240 VAC	2729	PG	217
PC90VE ①	9000	8000	4.6 Gal.	Vanguard	16.0	120/240 VAC	2946	PG	236

NOTE: ① Batteries are not included on any Electric Start Models.



PC32Ri

## Powerchief® Generators with Inverter Technology

Baldor Powerchief inverter generators are powered by air-cooled, 4-Cycle, industrial gasoline engines. An inverter converts DC current into standard household AC current. This new technology now allows inverters to be highly efficient in conjunction with a generator. High quality electrical output power is comparable to public utility sources. Powerchief inverter generators are ideal for powering computers & equipment sensitive to voltage surges.

### Features:

- Very Low Noise - quieter operation
- Compact & Lightweight - greater efficiency allows reduction in overall size & weight
- Low Fuel Consumption - inverter technology, combined with throttle control, automatically adjusts engine speed to electrical load, reducing fuel use

Catalog Number	Max. Watts	Cont. Watts	Fuel Capacity	Engine	Engine Hp	Volts	List Price	Mult. Sym.	Approx. Shpg. Wgt. (lbs)
PC17RI	1650	1400	4.2 Qt.	Robin	2.4	120 VAC/12 VDC	\$1737	PG	55
PC32RI	3200	2800	3.7 Gal.	Robin	7.0	120 VAC/12 VDC	3048	PG	140
PC43RI	4300	3800	4.2 Gal.	Robin	9.0	120 VAC/12 VDC	3905	PG	179

# Baldor Industrial Portable Generators

Powerchief Model	PC11R	PC30H	PC40H	PC50H	PC60H	PC60HE	PC90VE	PC17Ri ②	PC32Ri ②	PC43Ri ②
<b>Features</b>										
Switchless Full Pow'R	—	—	std	std	std	std	std	—	—	—
DC Circuit Breakers	std	—	—	—	—	—	—	std	std	std
AC Circuit Breakers	std	std	std	std	std	std	std	std	std	std
Low Oil Shutdown	std	std	std	std	std	std	std	std	std	std
Spark Arrestor Muffler	std	std	std	std	std	std	std	std	std	std
Extended Run Fuel Tank	—	—	std	std	std	std	std	—	std	std
Tubular Roll Cage	—	std	std	std	std	std	std	—	—	—
Neoprene Isolators	std	std	std	std	std	std	std	std	std	std
Focal Vibration System	—	—	std	std	std	std	std	—	—	—
3-Year Warranty	std	std	std	std	std	std	std	std	std	std
<b>Engine Model</b>										
Horsepower	2.4	5.5	8	9	11	11	16	2.4	7	9
Cylinder	1	1	1	1	1	1	2	1	1	1
Displacement-CC	85.8	163	242	270	337	337	480	85.8	211	265
Starting Systems ①	Recoil	Recoil	Recoil	Recoil	Recoil	12 Volt with Recoil	12 Volt with Recoil	Recoil	12 Volt with Recoil	12 Volt with Recoil
<b>Rating</b>										
Max Rating	1100W	3000W	4000W	5000W	6000W	6000W	9000W	1650W	3200W	4300W
Rated	900W	2500W	3500W	4000W	5000W	5000W	8000W	1400W	2800W	3800W
Volts	120VAC/ 12VDC	120VAC	120/240VAC	120/240VAC	120/240VAC	120/240VAC	120/240VAC	120VAC/ 12VDC	120VAC/ 12VDC	120VAC/ 12VDC
Amps	9.1	20.8	29.2/14.6	33.3/16.7	41.6/20.8	41.6/20.8	66.7/33.4	13.7	23.3	31.7
dBA (Avg) @ 7 meters	59	70	73	73	72	72	76	59	58	62
<b>Receptacles</b>										
Straight (515R) 120V, 15A, Single	—	1	—	—	—	—	—	—	—	—
Straight (515R) 120V, 15A, Duplex	—	1	—	—	—	—	—	—	—	—
Straight (520R GFCI) 120V, 20A, Duplex	1	—	1	1	1	1	1	1	1	1
Twist Lock (L530R) 120V, 30A	—	—	1	1	1	1	1	—	1	1
Twist Lock (L1430R) 120/240V, 30A	—	—	1	1	1	1	1	—	—	—
<b>Fuel System</b>										
Fuel Capacity (U.S. Gallons)	4.2 qt	3.8 qt	4.6 gal	4.6 gal	4.6 gal	4.6 gal	4.6 gal	4.2 qt	3.7 gal	4.2 gal
Operational Run Time/Full Load	2.5 hr	1.5 hr	4 hr	6 hr	4 hr	4 hr	3.2 hr	2.4 hr	5 hr	3.9 hr
Operational Run Time/Half Load	4.2 hr	2.3 hr	7 hr	10 hr	7 hr	7 hr	5.6 hr	4 hr	8.4 hr	6.6 hr
<b>Dimensions</b>										
Length	19.3"	22"	28"	28"	28"	28"	28"	19.3"	21"	22.8"
Width	11.6"	15.75"	20.5"	20.5"	20.5"	20.5"	21.50"	11.6"	18.9"	20.7"
Height	17.5"	16.5"	22.25"	22.25"	22.25"	22.25"	21.0"	17.5"	22.9"	24.3"
Weight (Net Dry)	55 lbs	94 lbs	162 lbs	162 lbs	187 lbs.	193 lbs	217 lbs	45 lbs	130 lbs	143 lbs

**NOTE:** ① Batteries are not included on any Electric Start Models.


② Inverter generator.

Baldor reserves the right to implement specifications or design changes without notice.

**WARNING:** Do not connect generator to any building's electrical system unless a disconnect switch has been installed.

Follow local and national electrical codes for proper installation.

## Receptacles

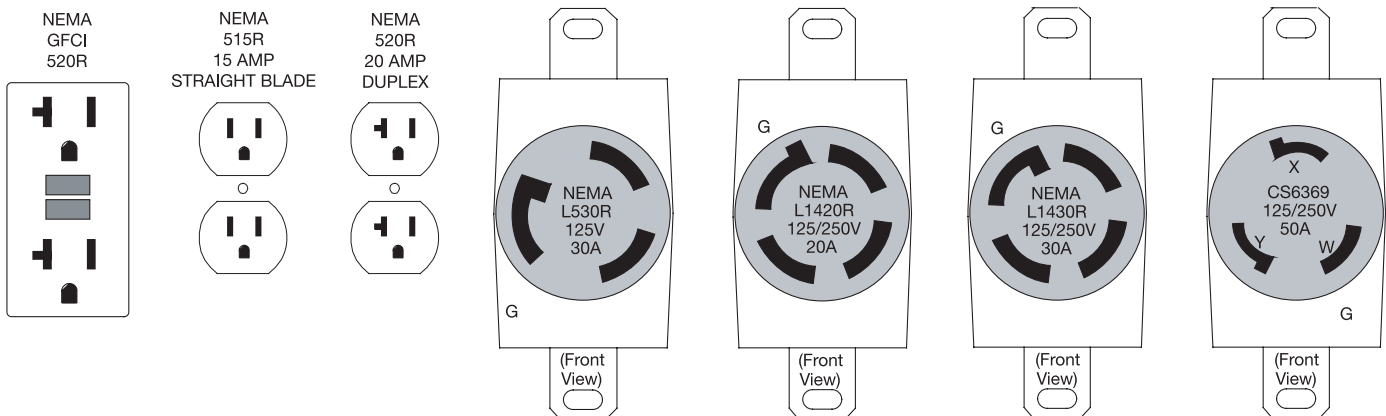

# Diesel Industrial Portable Generators

Baldor's diesel portables feature the rugged Hatz diesel engine, known worldwide as a superior air-cooled diesel engine. Baldor generators are manufactured to exceed industrial specifications using high quality components.

- Electric Start
- Brushless Alternator
- Hour Meter – Helps to track and schedule routine maintenance
- Voltage-120/240 Volt Single Phase
- Wheel Kit- Available as accessory



DG6E

## Diesel Industrial Portable Generators

Designed to operate on diesel fuel. Provides auxiliary power for many applications where diesel fuel is available. Suitable for commercial, construction, and farm applications.

Catalog Number ①	Max. Watts	Cont. Watts	Fuel Capacity	Engine	Engine Hp	Volts	List Price	Mult. Sym.	Approx. Shipping Wgt. (lbs)
DG3E	3300	3000	2.75 Gal.	Hatz	5.5	120/240 VAC	\$3582	PG	196
DG6E	6000	5500	4.6 Gal.	Hatz	9.9	120/240 VAC	4995	PG	273

## Specifications

	Portable Diesel Model	
	DG3E	DG6E
<b>Features</b>		
Switchless Full Pow'R	std	std
AC Voltmeter	std	std
Hourmeter	std	std
Low Oil Shutdown	std	std
Spark Arrestor Muffler	std	std
Extended Run Fuel Tank	std	std
Tubular Roll Cage	std	std
Neoprene Isolators	std	std
Focal Vibration System	std	std
3-Year Warranty	std	std
<b>Engine Model</b>		
	Hatz 1B30	Hatz 1B40
Horsepower	5.5	9.9
Cylinder	1	1
Displacement - CC	346	461.9
Starting Systems ①	12 Volt with Recoil	12 Volt with Recoil
<b>Rating</b>		
Max Rating	3300	6000
Rated	3000	5500
Volts	120/240 VAC	120/240 VAC
Amps	25/12.5	45.8/22.9
dBA (Avg) @ 7 meters	74	76
<b>Receptacles</b>		
Straight (520R GFCI) 120V, 20A, Duplex	1	2
Twist Lock (L530R) 120V, 30A	1	1
Twist Lock (L1420R) 120/240V, 20A	1	—
Twist Lock (L1430R) 120/240V, 30A	—	1
<b>Fuel System</b>		
Fuel Capacity (U.S. Gallons)	2.75	4.6
Operational Run Time/Full Load	5.4 hr	4.6 hr
Operational Run Time/Half Load	9 hr	6 hr
<b>Dimensions</b>		
Length	24.5"	32"
Width	18.5"	20.5"
Height	21.75"	23.75"
Weight (Net Dry)	172 lbs	246 lbs

**NOTE:** ① Batteries are not included or available on any Electric Start Models. Baldor reserves the right to implement specifications or design changes without notice.

**WARNING:** Do not connect generator to any building's electrical system unless a disconnect switch has been installed. Follow local and national electrical codes for proper installation.



TS80T

# Industrial Towable Generators

## Applications

Industrial towable generators are designed and engineered for optimum performance and superior reliability. From the ultra quiet sound attenuated enclosures to the state-of-the-art electronics and controls, these units are engineered to meet the most rugged conditions. Place the unit at the job site, connect the load and start it up. These full-featured units are specially suited for all industrial, commercial and rental applications. Units can also be used with an automatic transfer switch for standby applications.

### Standard Features

- Large Integral Fuel Tank
- Overspeed Shutdown
- Extra Large Access Doors
- Manual or Automatic Start
- Available with or without the trailer
- High Water Temperature Shutdown
- Overcrank Lockout
- Battery Included
- Voltage Selections – Three-position switch  
No reconnection required
- Low Oil Pressure Shutdown
- Full Featured Control Panel
- Fuel Water Separators
- Single Point Lifting Eye

### Additional Features for TS130 thru TS400

- 24 hour sub base double wall tank
- Alarm horn with silencer
- Low coolant/Low fuel level shutdown

## Industrial Standby (with or without trailer)

Catalog Number	kVA/kW @ 240V 1 Phase	kVA/kW @ 208/240 3 Phase	kVA/kW @ 480V 3 Phase	VAC 1 Phase	VAC 3 Phase	Engine	Fuel Capacity	List Price	Mult. Sym.	Approx. Shipping Wgt. (lbs)
<b>With Trailer</b>										
TS25T	18/18	25/20	25/20	120/240	208/240/480	John Deere	50 Gal.	\$21636	TG	2560
TS35T	25/25	37/30	37/30	120/240	208/240/480	John Deere	70 Gal.	26521	TG	2560
TS45T	27/27	46/37	48/38	120/240	208/240/480	John Deere	80 Gal.	31194	TG	3540
TS60T	43/43	60/48	61/49	120/240	208/240/480	John Deere	80 Gal.	34110	TG	3505
TS80T	45/45	72/58	81/65	120/240	208/240/480	John Deere	80 Gal.	37025	TG	3848
TS130T	70/70	131/105	134/107	120/240	208/240/480	John Deere	160 Gal.	58470	TG	5600
TS175T	80/80	169/135	175/140	120/240	208/240/480	John Deere	160 Gal.	66183	TG	6200
TS250T	175/175	250/200	250/200	120/240	208/240/480	John Deere	260 Gal.	95427	TG	8900
TS400T	320/326	400/320	400/320	120/240	208/240/480	John Deere	420 Gal.	149350	TG	15400
<b>Skid Mount Without Trailer</b>										
TS25S	18/18	25/20	25/20	120/240	208/240/480	John Deere	50 Gal.	20459	TG	2085
TS35S	25/25	37/30	37/30	120/240	208/240/480	John Deere	70 Gal.	24489	TG	2085
TS45S	27/27	46/37	48/38	120/240	208/240/480	John Deere	80 Gal.	28313	TG	2829
TS60S	43/43	60/48	61/49	120/240	208/240/480	John Deere	80 Gal.	30893	TG	2700
TS80S	45/45	72/58	81/65	120/240	208/240/480	John Deere	80 Gal.	33474	TG	3053
TS130S	70/70	131/105	134/107	120/240	208/240/480	John Deere	160 Gal.	55019	TG	4610
TS175S	80/80	169/135	175/140	120/240	208/240/480	John Deere	160 Gal.	61613	TG	5205
TS250S	175/175	250/200	250/200	120/240	208/240/480	John Deere	260 Gal.	89604	TG	7350
TS400S	320/320	400/320	400/320	120/240	208/240/480	John Deere	420 Gal.	140237	TG	12400

**NOTE:** "S" suffix – skid mount, no trailer; "T" suffix – with trailer.

Baldor reserves the right to implement specifications or design changes without notice.

# Baldor Towable Generators

Catalog Number	TS25T/S	TS35T/S	TS45T/S	TS60T/S	TS80T/S	TS130T/S	TS175T/S	TS250T/S	TS400T/S	
<b>Engine</b>	John Deere	John Deere	John Deere	John Deere	John Deere	John Deere	John Deere	John Deere	John Deere	
<b>Standby Output</b>	(kVA/kW)									
3 ph @ 480 Volt	25/20	37/30	48/38	61/49	81/65	134/107	175/140	250/200	400/320	
3 ph @ 208 or 240 Volt	25/20	37/30	46/37	60/48	72/58	131/105	169/135	250/200	400/320	
1 ph @ 240 Volt	18/18	25/25	27/27	43/43	45/45	70/70	100/100	175/175	320/320	
<b>Prime Output</b>	(kVA/kW)									
3 ph @ 480 Volt	23/18	33/27	44/35	56/45	75/60	121/97	159/127	227/180	365/292	
3 ph @ 208 or 240 Volt	23/18	33/27	44/35	56/45	69/55	119/95	156/125	227/180	365/292	
1 ph @ 240 Volt	18/18	22/22	25/25	40/40	43/43	66/66	95/95	160/160	290/290	
<b>Voltage Selections</b>										
Voltage - 3 ph Adjustable	208/220/240 416/440/ 460/480	208/220/240 416/440/ 460/480	208/220/240 416/440/ 460/480	208/220/240 416/440/ 460/480	208/220/240 416/440/ 460/480	208/220/240 416/440/ 460/480	208/220/240 416/440/ 460/480	208/220/240 416/440/ 460/480	208/220/240 416/440/ 460/480	208/220/240 416/440/ 460/480
Voltage - 1 ph Adjustable	120/127/139 240/254/277	120/127/139 240/254/277	120/127/139 240/254/277	120/127/139 240/254/277	120/127/139 240/254/277	120/127/139 240/254/277	120/127/139 240/254/277	120/127/139 240/254/277	120/127/139 240/254/277	120/127/139 240/254/277
3-Phase Power Factor	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
Voltage Regulation	1/2%	1/2%	1/2%	1/2%	1/2%	1/2%	1/2%	1/2%	1/2%	
Frequency ④	60 Hz.	60 Hz.	60 Hz.	60 Hz.	60 Hz.	60 Hz.	60 Hz.	60 Hz.	60 Hz.	
Total Harmonic Distortion	<5%	<5%	<5%	<5%	<5%	<5%	<5%	<5%	<5%	
Insulation Material	Class H	Class H	Class H	Class H	Class H	Class H	Class H	Class H	Class H	
<b>Amperage (Prime):</b>										
3 ph 480 Volt	27.1	39.7	52.6	67	90.2	145.8	203.0	277	439	
3 ph 240 Volt	54.1	79.4	105.3	134	165.4	285.7	375.9	555	878	
3 ph 208 Volt	62.5	91.6	121.4	155	190.8	329.6	433.7	637	1013	
Single phase amperage @ 240V/120V	75/75	91/91	104/2x104	166/2x166	179/179	275/275	312/2x312	361/2x361	1210/2x1210	
<b>Engine Specifications</b>										
Model	4024TF270	4024TF270	5030TF270	5030TF270	4045TF275	6068HF285	6068HF285	6068HF485	6135HF485	
Cylinders	4	4	5	5	4	6	6	6	6	
Induction System	Turbocharged	Turbocharged	Turbocharged	Turbocharged	Turbocharged	Turbocharged	Turbocharged	Turbocharged Charged Air Cooling	Turbocharged Charged Air Cooling	
Displacement, Liter/Cu. In.	2.4/149	2.4/149	3.0/186	3.0/186	4.5/276	6.8/414	6.8/415	6.8/415	13.5/824	
Hp @ Rated Speed	48	48	80	80	102	166	211	314	538	
RPM	1800	1800	1800	1800	1800	1800	1800	1800	1800	
Bore and Stroke	3.4" x 4.1"	3.4" x 4.1"	3.4" x 4.1"	3.4" x 4.1"	4.2" x 5.0"	4.2" x 5.0"	4.2" x 5.0"	4.2" x 5.0"	5.2" x 6.5"	
Oil capacity (with filter)	8.5 quarts	8.5 quarts	11.8 quarts	11.8 quarts	14 quarts	18 quarts	34 quarts	34 quarts	49 quarts	
<b>Cooling</b>	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	
<b>EPA Emissions Level</b>	Tier 2	Tier 2	Tier 2	Tier 2	Tier 2	Tier 3	Tier 3	Tier 3	Tier 3	
Battery Minimum Cold Cranking Amps (supplied)	675	675	925	925	925	925	925	725	2X 725	
<b>Receptacle Specifications</b>										
120 Volt 20 Amp Duplex GFCI	2	2	3	3	3	4	4	4	4	
120/240 Volt 50 Amp CS6369 Twistlock	2	2	3	3	3	4	4	4	4	
Two Wire Remote Start Capability	std	std	std	std	std	std	std	std	std	
<b>Fuel System Specifications (Diesel)</b>										
Fuel Consumption GPH – 1/2 load/ (full load)	1.0/(2.1)	1.4/(2.8)	1.8/(3.7)	2.2/(4.4)	3.1/(6.3)	4.2/(7.9)	5.6/(10.5)	7.9/(15.5)	12/(24)	
Approximate Run Time (Hours) 1/2 load/ (full load) @ Standby Rating	50/(24)	36/(18)	44/(22)	36/(18)	26/(13)	50/(27)	38/(20)	33/(17)	35/(17)	
Fuel Capacity (Ga.)	50	50	80	80	80	210	210	260	420	
<b>Capacity and Dimensions</b>										
Sound Level dBA (Avg) @ 7 meters, full load	67	67	67	67	67	71	67	67	68	
Dimensions (LxWxH) with trailer	131" x 62" x 72"	131" x 62" x 72"	147" x 62" x 85"	147" x 62" x 85"	147" x 62" x 85"	180" x 75" x 94"	180" x 75" x 94"	218" x 80" x 102"	251" x 98" x 126"	
Dimensions (LxWxH) without trailer	74" x 38" x 52"	74" x 38" x 52"	84" x 38" x 61"	84" x 38" x 61"	84" x 38" x 61"	118" x 42" x 74"	118" x 42" x 74"	159" x 54" x 76"	196" x 66" x 95"	
Weight without Fuel (lb)	2560	3075	3540	4040	4020	5600	6200	8900	15400	
Weight without Fuel and without Trailer (lb)	2085	2515	2555	3215	3180	4610	5205	7350	12400	

**NOTES:** Engine, Generator Instrumentation – Volts, amps, frequency, phase selector switch, oil pressure, water temp, battery volts, start/stop/auto switch, voltage adjusting rheostat, runtime hours, individual fault shutdown lights, panel lights with switch, receptacle panel. Standby Rating for supplying emergency power for the duration of a utility power outage. No overload capability for standby rating. Standby ratings in accordance with ISO 3046, BS55114, DIN 6271. Baldor reserves the right to implement specifications or design changes without notice.

**WARNING:** Do not connect generator to any building's electrical system unless a disconnect switch has been installed. Follow local and national electrical codes for proper installation.



## Industrial Towable Accessories

The following accessories are available to modify TS style Industrial Towable Generators from the stock configuration. The accessory items can either be field installed or added at the time of order through our exclusive Baldor Mod Express™ program. Please see the ModEx section of this catalog for more information on Mod Express™ charges and ordering information.

Catalog No.	Description	Fits Models	List Price	Mult. Sym.
BTCGR6	Battery Charger – 12 Volt / 6 Amp Float. Includes 6 ft power cord with grounding plug for AC input power and 4 ft power cord with ring terminals for DC output.	All TS	\$223	G8
BTCGR10	Battery Charger – 12 Volt / 10 Amp Float. Includes 6 ft power cord with grounding plug for AC input power and 4 ft power cord with ring terminals for DC output.	All TS	668	G8
BTHTR51	Battery Heater – 120 Volt / 50 Watt battery heater designed to warm one battery. Includes power cord and automatic thermostat.	All TS	274	G8
BTHTR102	Battery Heater – 120 Volt / 100 Watt battery heater designed to warm two batteries. Includes power cord and automatic thermostat.	TS400	392	G8
BLKHTR10	Block Heater Kit – Includes 120 Volt / 1000 Watt block heater with power cord, mounting bracket, fittings and coolant hoses.	TS25 to TS60	259	G8
BLKHTR15	Block Heater Kit – Includes 120 Volt / 1500 Watt block heater with power cord, mounting bracket, fittings and coolant hoses.	TS80 to TS250	259	G8
BLKHTR25	Block Heater Kit – Includes 120 Volt / 2500 Watt block heater with power cord for hard wiring connection, mounting bracket, fittings and coolant hoses.	TS400	259	G8
TSBHC200	2 inch Ball Hitch coupling. Mounts to all TS trailers. Replaces standard pintle style coupling.	All TS	197	G8
TSBHC256	2-5/16 inch Ball Hitch coupling. Mounts to all TS trailers. Replaces standard pintle style coupling.	All TS	197	G8
RH2TBP	Tri-Ball w/Pintle Hook trailer hitch for 2" receiver tube. Features 3 chrome towing balls (1-7/8", 2", 2-5/16") and a cast steel pintle jaw on one solid steel shank. Jaw locks in the open position for coupler towing with the 2" ball, or in the closed position for lunette eye (pintle) towing.	All TS	188	G8

## Industrial Towable Accessories – Mod Express™ Only

The following accessories are available to modify TS style Industrial Towable Generators from the stock configuration. The accessory items can be added at the time of order through our exclusive Baldor Mod Express™ program. Please see the ModEx section of this catalog for more information on Mod Express™ charges and ordering information.

Catalog No.	Description	Fits Models	List Price	Mult. Sym.
SPKTS1	Shore Power Kit – Includes 120 Volt shore power connector in receptacle panel and additional connections inside engine compartment for convenient connection of 120 Volt auxiliary battery chargers and heaters.	All TS	\$186	G8
SPKTS2	Shore Power Kit – Includes 240 Volt shore power connector in receptacle panel and additional connections inside engine compartment for convenient connection of 120 Volt auxiliary battery chargers and direct connection for 240 Volt block heaters.	TS400	336	G8
TB5000A11	Mechanical power lugs with hex sockethead screws to fit wire sizes of one 600MCM or two 250 MCM - 1/0. Kit includes 10 lugs for power, neutral, and ground connections on TS250 mobile generators.	TS250	188	G8

# Baldor POW'R LITE Mobile Light Tower

Baldor's compact mobile light tower provides 4000 watts of light anywhere you need it. With metal-halide lamps the Baldor POW'R LITE models will provide light coverage for over 7 acres. Each model is powered by a Baldor 6000-watt light tower generator which are designed for a compact and efficient installation. POW'R LITE light towers are powered by the dependable Kubota diesel engine. A 50-gallon fuel tank provides for 100 hours of operation. The Baldor POW'R LITE light towers can be used for various types of applications: Construction, Emergency, Industrial, Mining, Civil Engineering and Event Lighting.



## Features:

- 4 Powerful 1000 Watt metal halide lamps.
- Elliptical light fixtures provide a more efficient light pattern than conventional round fixtures. The 4 – 1000 Watt metal halide lamps are supported on both ends to enhance durability and long life.
- 2000 watts for convenience outlets.
- One 120-volt GFI convenience receptacle and one 240-volt twist-lock receptacle.
- Quiet, dependable Kubota diesel engine provides “flicker-free” operation.
- Enclosure construction with heavy gauge painted aluminum.
- Zinc plated 30’ 4-section mast, coiled mast cords.
- Tower rotates 360 degrees
- Heavy-duty winch design and integral forklift pockets.
- 50-gallon fuel tank – up to 100 hours of running time.
- Quality highway trailer suspension.
- Low oil/high temperature shutdown protection.
- Runtime hour indicator.
- Battery included.

Catalog Number	Max. Watts	Mast Height	Fuel Capacity	Engine	Engine Hp	Lighting Type	List Price	Mult. Sym.	Weight (lbs)*
PL6000K	6000	30	50 gal.	Kubota	11.9	Metal Halide	\$12819	LT	1800

**NOTES:** \* 53-foot flatbed easily holds 10 compact units.

## Mobile Light Tower Accessories

The following accessories are available to modify Baldor light towers from the stock configuration. The accessory items can either be field installed or added at the time of order.

Catalog No.	Description	Fits Models	List Price	Mult. Sym.
PLBHC200	2 inch Pintle Hitch coupling. Mounts to all Light Tower trailers. Replaces standard 2" ball style coupling.	All PL	\$152	G8
PLBHC256	3 inch Pintle Hitch coupling. Mounts to all Light Tower trailers. Replaces standard 2" ball style coupling.	All PL	152	G8
RH2TBP	Tri-Ball w/Pintle Hook trailer hitch for 2" receiver tube. Features 3 chrome towing balls (1-7/8", 2", 2-5/16") and a cast steel pintle jaw on one solid steel shank. Jaw locks in the open position for coupler towing with the 2" ball, or in the closed position for lunette eye (pintle) towing.	All PL	188	G8
PLDL12	Dome Light. Provides interior lighting inside the genset engine compartment. Connects to the engine starting battery - 12 Vdc.	All PL	36	G8

# Baldor Mobile Light Towers

<b>POW'R LITE Light Tower</b>	<b>PL6000K</b>
<b>Engine / Generator</b>	
Engine	D905 Kubota
Engine Type	Diesel, 3 Cyl., Nat. Asp. 898 cc
Engine HP	11.9
Fuel tank capacity (Gal.)	30
Run time 1-Tankful	60 (Hours)
Sound Level	72dBA
Generator Manufacturer	Baldor
Generator Model	30.00115
6kW Generator	Std
Low Oil Shutdown	Std
High Temp Shutdown	Std
Hour meter	Std
DC Voltmeter	Std
12V Battery	Std
<b>Mast / Enclosure</b>	
Mast Height	30'
Mast Material	Zinc Plated
Mast sections	4
Tower rotation	360 Deg
Mast Cord	Coiled
Electric winch for tower	Optional
Enclosure material	
Sides	10 Gauge
Doors	12 Gauge
Hinge material	Aluminum
Finish/Coating Enclosure	Powder Coat
Finish/Coating Hardware Tower, outriggers, jack, safety chains	Zinc Plated
Lockable Doors	Std
Gas door struts	Optional
Fenders	Steel
Outrigger support system	3 Point
Ground rod holder & cable	Optional
Forklift pockets	Std
<b>Lighting / Electric</b>	
Lighting Coverage	5-7 Acres
Lighting Type	4/1000W Metal Halide
Lamp Fixture Materials	Spider Bulb Support Tempered Glass Bulb Lens
Ballasts	Core & Coil "Easy Access"
Quick Disconnect Lights	Option
Receptacles at panel	1/120V GFI 20 AMP Duplex 1/30 Amp Twist Lock 240V
Control Panel	Internal
Individual Lamp Switches	Std
<b>Trailer</b>	
Standard Hitch (Removable)	2" Ball
Trailer Lights	Std
Transport tie-downs	Std
Tires	14"
Towing speed (MPH)	55
Height stowed	63"
Length stowed	152"
Width stowed	54"
Weight - Dry (Lbs)	1700

**NOTE:** Baldor reserves the right to implement specifications or design changes without notice.

# Generator Mod Express™

## Ordering Information

To order, specify the catalog number of the stock product and the MOD number. Use the normal discount for the stock products and the modification. Lead times indicated are subject to availability of stock items in the Generator ModEx Warehouse. Customer will absorb freight costs when the stock products are shipped to the Generator ModEx Warehouse from field warehouses. Please check stock availability before quoting lead time. Modification prices do not include the cost of genset or any additional ModEx kits or parts. Standard Mod Express™ cancellation policy, order processing and charge methods apply. Please refer to the Mod Express™ section of 501 Catalog for more details on cancellation and shipping charge methods.

<b>Modification Number</b>	<b>Generator Mod Express™ - Description and List Price</b>	<b>Working Days Required</b>
<b>G3</b>	<b>Install Battery Heater onto Engine Starting Battery</b>	Two Days
G3A	Battery heater will be mounted to and secured to engine starting battery. Battery cannot be shipped loose. Please specify and order battery heater on sales order. <b>Generator Rating</b> All TS Sizes	
	<b>List Price</b> \$155	
<b>G4</b>	<b>Install Battery Charger into Generator Set</b>	Two Days
G4A	Battery charger will be mounted and connected. Battery cannot be shipped loose. Please specify and order battery charger on sales order. <b>Generator Rating</b> All TS Sizes	
	<b>List Price</b> \$200	
<b>G7</b>	<b>Modify Power Connections</b>	Two Days
G7A	Modify standard bus bar output power termination to include provisions for mechanical lugs with hex sockethead screws. Please specify and order additional power terminal kit on sales order. <b>Generator Rating</b> TS250	
	<b>List Price</b> \$230	
G7B	Install shore power connector to TS units. Includes mounting of shore power connector to main power panel and addition of receptacle inside engine compartment. Please specify shore power connector kit on sales order <b>Generator Rating</b> TS25 to TS35 TS60 to TS80 (Tier II) TS130 to TS400	Two Days
	<b>List Price</b> \$230 255 290	
<b>G8</b>	<b>Convert Standard Trailer Hitch Coupling To Ball Hitch or Pintle Hitch</b>	Two Days
G8A	Replace standard trailer hitch coupling with optional ball or pintle hitch. Please specify new coupling size and order trailer hitch kit on sales order. <b>Generator Rating</b> All TS Sizes All Pow'R Lite Light Towers	
	<b>List Price</b> \$110 110	
<b>G9</b>	<b>Change Trailer Brakes from Hydraulic to Electric on TS Gensets</b>	Two Days
G9A	Replace and install components as necessary to convert from hydraulic to electric braking on standard TS trailers. <b>Generator Rating</b> All TS Sizes	
	<b>List Price</b> \$200	
<b>G10</b>	<b>Install Engine Block Heater to Standard Genset</b>	Two Days
G10A	Install Engine Block Heater to Standard TS units. Includes mounting of heater and connection of engine heater hoses inside engine compartment. Please specify Engine Block Heater kit on sales order. <b>Generator Rating</b> All TS Sizes	
	<b>List Price</b> \$230	
<b>G11</b>	<b>Install Electronic Governor to Standard Genset</b>	Three Days
G11A	Install Electronic Governor to Standard TS units. Includes removal and installation of all appropriate governor parts inside engine compartment, engine operating adjustments and final testing. Please specify Electronic Governor kit on sales order. <b>Generator Rating</b> All TS Sizes	
	<b>List Price</b> \$550	

# Generator Selection Guide

To determine the right size generator, add the total watts of all lights, appliances, tools or other equipment to be connected to the generator. Undersizing of the equipment can be avoided by considering all of the loads that will be connected to the generator and by determining the starting requirements of all electric motors. Check equipment nameplates to determine wattage requirements. If wattage is not shown, but amps and volts are given, the following approximation may be used:

**Amps x Volts = Watts      Example: 12.5 Amps x 120 Volts = 1500 Watts.**

The chart shown below will help you in selecting the proper size generator. For portable electric tools and equipment, check the nameplate rating or use the chart for average requirements. Your Baldor Generator is capable of momentarily supplying 150% of its nameplate rating, to assist starting electric motors.

Home		Commercial	
Generator Applications	Starting Wattage Requirements	Generator Applications	Starting Wattage Requirements
<b>Air Conditioner – Central</b> 24,000 BTU                      3300 40,000 BTU                      7800 <b>Air Conditioner – Window</b> 10,000 BTU                      3000 24,000 BTU                      6000 <b>Clothes Dryer</b> Gas                                  2200 Electric                              7550 <b>Coffee Maker</b> 1750 <b>Computer</b> 500-1200 <b>Dehumidifier</b> 1450 <b>Dishwasher</b> 2100-2850 <b>Electric Range</b> 1500-6000 <b>Fan</b> Attic                                  350 Window                              100-200 <b>Furnace</b> 1/6 Hp Fan                          1250 1/3 Hp Fan                          2100 <b>Light Bulbs</b> As marked on bulb <b>Microwave Oven</b> 625 Watt Power                      2500 850 Watt Power                      3200 <b>Radio</b> 50 - 200 <b>Refrigerator</b> 3100 <b>Sump Pump</b> 1/3 Hp                                  3200 1/4 Hp                                  2150 <b>Television</b> 300 <b>Water Heater</b> 4500 per element <b>Well Pump</b> 1/3 Hp                                  3200 1/4 Hp                                  2150		<b>Air Compressor</b> 1/2 Hp                                  2000 1 Hp                                    3500 2 Hp                                    6500 <b>Drill</b> 1/4"                                    400 3/8"                                    600 1/2"                                    900 <b>Grinder</b> Bench – 8"                          2500 <b>Hammer</b> Demolition                          3300 Rotary                                  3300 <b>Impact Wrench</b> 1/2"                                    1200 3/4"                                    1400 1"                                        2400 <b>Pressure Washer</b> 1 Hp                                    3500 1-1/2 Hp                              5000 3 Hp                                    9000 <b>Pump, Submersible</b> 3/4 Hp                                  3000 1 Hp                                    3500 <b>Sander, Belt</b> 1600 <b>Saw, Chain</b> 12"                                    1800 14"                                    2200 <b>Saw, Circular</b> 6-1/2"                                  1200 8-1/4"                                  3000	

**NOTE:** This chart is to be used only as a guide. Motor starting requirements have many variables.


## Electrical Formulas – Alternating Current

Single Phase	Three Phase
Watts = Volts x Amps x Power Factor  $\text{Amps} = \frac{\text{kW} \times 1000}{\text{V} \times \text{pf}}$	Watts = Volts x Amps x Power Factor x 1.732  $\text{Amps} = \frac{\text{kW} \times 1000}{1.732 \times \text{V} \times \text{pf}}$
<b>Notes:</b> 1 kilowatt (kW) = 1000 Watts Typical Power Factor for Single Phase is 1.0 (Unity)	<b>Notes:</b> 1 Kilowatt (kW) = 1000 Watts Typical Power Factor for Three Phase is 0.8

Information provided is subject to change without notice. Contact your local Baldor District Office for additional information.



# BALDOR DISTRICT OFFICES

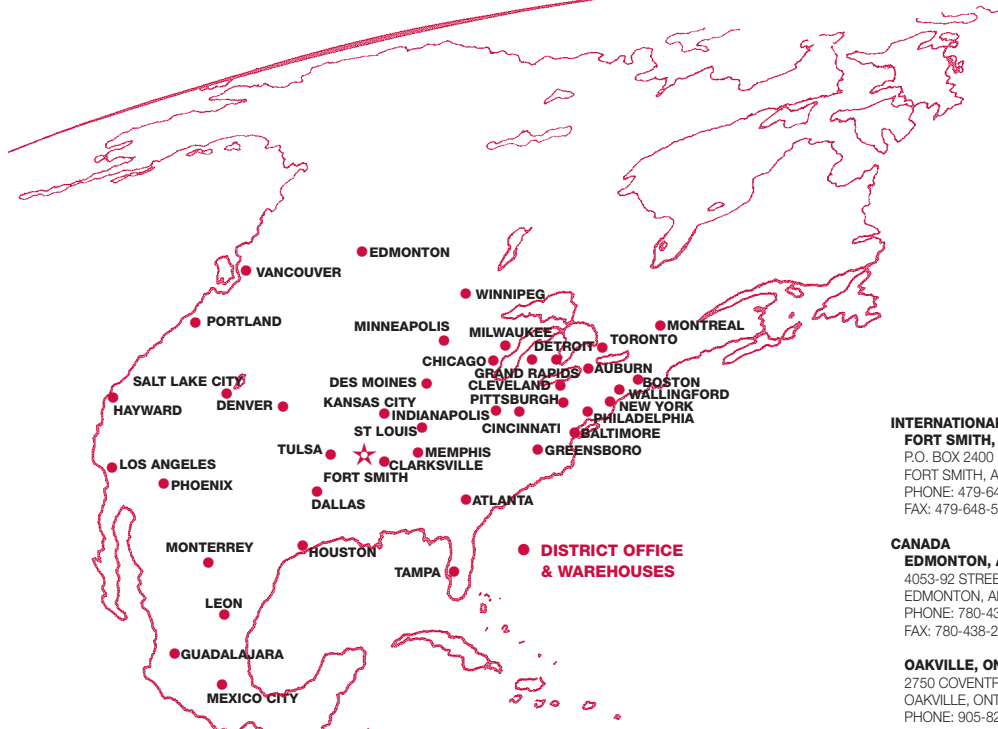

## UNITED STATES

### ARIZONA

**PHOENIX**  
4211 S 43RD PLACE  
PHOENIX, AZ 85040  
PHONE: 602-470-0407  
FAX: 602-470-0464

### ARKANSAS

**CLARKSVILLE**  
1001 COLLEGE AVE.  
CLARKSVILLE, AR 72830  
PHONE: 479-754-9108  
FAX: 479-754-9205

### CALIFORNIA

**LOS ANGELES**  
6480 FLOTILLA  
COMMERCE, CA 90040  
PHONE: 323-724-6771  
FAX: 323-721-5859

### HAYWARD

21066 FORBES STREET  
HAYWARD, CA 94545  
PHONE: 510-785-9900  
FAX: 510-785-9910

### COLORADO

**DENVER**  
2520 W BARBERRY PLACE  
DENVER, CO 80204  
PHONE: 303-623-0127  
FAX: 303-595-3772

### CONNECTICUT

**WALLINGFORD**  
65 SOUTH TURNPIKE ROAD  
WALLINGFORD, CT 06492  
PHONE: 203-269-1354  
FAX: 203-269-5485

### FLORIDA

**TAMPA/PUERTO RICO/  
VIRGIN ISLANDS**  
3906 EAST 11TH AVENUE  
TAMPA, FL 33605  
PHONE: 813-248-5078  
FAX: 813-247-2984

### GEORGIA

**ATLANTA**  
62 TECHNOLOGY DR.  
ALPHARETTA, GA 30005  
PHONE: 770-772-7000  
FAX: 770-772-7200

### ILLINOIS

**CHICAGO**  
1601 FRONTENAC ROAD  
NAPERVILLE, IL 60563  
PHONE: 630-848-5100  
FAX: 630-848-5110

### INDIANA

**INDIANAPOLIS**  
5525 W. MINNESOTA STREET  
INDIANAPOLIS, IN 46241  
PHONE: 317-246-5100  
FAX: 317-246-5110

### IOWA

**DES MOINES**  
1800 DIXON STREET, SUITE C  
DES MOINES, IA 50316  
PHONE: 515-263-6929  
FAX: 515-263-6515

### MARYLAND

**BALTIMORE**  
6660 SANTA BARBARA RD.  
SUITE 22-24  
ELKBRIDGE, MD 21075  
PHONE: 410-579-2135  
FAX: 410-579-2677

### MASSACHUSETTS

**BOSTON**  
6 PULLMAN STREET  
WORCESTER, MA 01606  
PHONE: 508-854-0708  
FAX: 508-854-0291

### MICHIGAN

**DETROIT**  
33782 STERLING PONDS BLVD.  
STERLING HEIGHTS, MI 48312  
PHONE: 586-978-9800  
FAX: 586-978-9969

### GRAND RAPIDS

668 3 MILE ROAD NW  
GRAND RAPIDS, MI 49504  
PHONE: 616-785-1784  
FAX: 616-785-1788

### MINNESOTA

**MINNEAPOLIS**  
21080 134TH AVE. NORTH  
ROGERS, MN 55374  
PHONE: 763-428-3633  
FAX: 763-428-4551

### MISSOURI

**ST LOUIS**  
422 INDUSTRIAL DRIVE  
MARYLAND HEIGHTS, MO 63043  
PHONE: 314-298-1800  
FAX: 314-298-7660

### KANSAS CITY

1501 BEDFORD AVENUE  
NORTH KANSAS CITY, MO 64116  
PHONE: 816-587-0272  
FAX: 816-587-3735

### NEW YORK

**AUBURN**  
ONE ELLIS DRIVE  
AUBURN, NY 13021  
PHONE: 315-255-3403  
FAX: 315-253-9923

### NORTH CAROLINA

**GREENSBORO**  
1220 ROTHERWOOD ROAD  
GREENSBORO, NC 27406  
P O BOX 16500  
GREENSBORO, NC 27416  
PHONE: 336-272-6104  
FAX: 336-273-6628

### OHIO

**CINCINNATI**  
2929 CRESCENTVILLE ROAD  
WEST CHESTER, OH 45069  
PHONE: 513-771-2600  
FAX: 513-772-2219

### CLEVELAND

8929 FREEWAY DRIVE  
MACEDONIA, OH 44056  
PHONE: 330-468-4777  
FAX: 330-468-4778

### OKLAHOMA

**TULSA**  
2 EAST DAWES  
BIXBY, OK 74008  
PHONE: 918-366-9320  
FAX: 918-366-9338

### OREGON

**PORTLAND**  
20393 SW AVERY COURT  
TUJALATIN, OR 97062  
PHONE: 503-691-9010  
FAX: 503-691-9012

### PENNSYLVANIA

**PHILADELPHIA**  
1035 THOMAS BUSCH  
MEMORIAL HIGHWAY  
PENNNSAUKEN, NJ 08110  
PHONE: 856-661-1442  
FAX: 856-663-6363

### PITTSBURGH

616H BEATTY ROAD  
MONROEVILLE, PA 15146  
PHONE: 412-380-7244  
FAX: 412-380-7250

### TENNESSEE

**MEMPHIS**  
4000 WINCHESTER ROAD  
MEMPHIS, TN 38118  
PHONE: 901-365-2020  
FAX: 901-365-3914

### TEXAS

**HOUSTON**  
4647 PINE TIMBERS  
SUITE # 135  
HOUSTON, TX 77041  
PHONE: 713-895-7062  
FAX: 713-690-4540

### DALLAS

3040 QUEBEC  
DALLAS, TX 75247  
PHONE: 214-634-7271  
FAX: 214-634-8874

### UTAH

**SALT LAKE CITY**  
2230 SOUTH MAIN STREET  
SALT LAKE CITY, UT 84115  
PHONE: 801-832-0127  
FAX: 801-832-8911

### WISCONSIN

**MILWAUKEE**  
2725 SOUTH 163RD STREET  
NEW BERLIN, WI 53151  
PHONE: 262-784-5940  
FAX: 262-784-1215

### INTERNATIONAL SALES

**FORT SMITH, AR**  
P.O. BOX 2400  
FORT SMITH, AR 72902  
PHONE: 479-646-4711  
FAX: 479-648-5895

### CANADA

**EDMONTON, ALBERTA**  
4053-92 STREET  
EDMONTON, ALBERTA T6E 6R8  
PHONE: 780-434-4900  
FAX: 780-438-2600

### OAKVILLE, ONTARIO

2750 COVENTRY ROAD  
OAKVILLE, ONTARIO L6H 6R1  
PHONE: 905-829-3301  
FAX: 905-829-3302

### MONTREAL, QUEBEC

1844 WILLIAM STREET  
MONTREAL, QUEBEC H3J 1R5  
PHONE: 514-933-2711  
FAX: 514-933-8639

### VANCOUVER, BRITISH COLUMBIA

1538 KEBET WAY  
PORT COQUITLAM, BC V3C 5M5  
PHONE: 604-421-2822  
FAX: 604-421-3113

### WINNIPEG, MANITOBA

54 PRINCESS STREET  
WINNIPEG, MANITOBA R3B 1K2  
PHONE: 204-942-5205  
FAX: 204-956-4251

### AUSTRALIA

UNIT 3, 6 STANTON ROAD  
SEVEN HILLS, NSW 2147,  
AUSTRALIA  
PHONE: (61) (2) 9674 5455  
FAX: (61) (2) 9674 2495

### UNIT 8, 5 KELLETTS ROAD

ROWVILLE, VICTORIA, 3178  
AUSTRALIA  
PHONE: (61) (3) 9753 4355  
FAX: (61) (3) 9753 4366

### AMÉRICA DEL SUR

APTDO. 0818-00440  
CIUDAD DE PANAMÁ, PANAMÁ  
PHONE: +507 261-5347  
FAX: +507 261-5355

### CENTRO AMÉRICA Y CARIBE

RESIDENCIAL PINARES DE SUIZA  
POL. 15 #44,  
NVA. SAN SALVADOR, EL SALVADOR  
PHONE: +503 2288-1519  
FAX: +503 2288-1518

### CHINA

SHANGHAI JIAHUA BUSINESS CENTER  
ROOM NO. A-8421  
808 HONG QIAO ROAD  
SHANGHAI 200030  
PHONE: 86-21-64473060  
FAX: 86-21-64078620

### GERMANY

DIESELSTRASSE 22  
D-85551 KIRCHHEIM  
MUNICH, GERMANY  
PHONE: +49 89 90 5080  
FAX: +49 89 90 50 8492

### INDIA

14, COMMERCE AVENUE  
MAHAGANESH COLONY  
RAUD ROAD  
PUNE - 411 038  
MAHARASHTRA, INDIA  
PHONE: 91 20 25 45 95 31  
FAX: 91 20 25 45 95 30

### ITALY

BALDOR ASR AG  
SUCCURSALE DI MENDRISIO  
VIA BORROMINI, 20A  
CH-6850 MENDRISIO  
SWITZERLAND  
PHONE: 0041 91 640 99 50  
FAX: 0041 91 630 26 33

### JAPAN

DIA BLDG 802,  
2-21-1 TSURUYA-CHO,  
KANAGAWA-KU  
YOKOHAMA, 221-0835, JAPAN  
PHONE: 81-45-412-4506  
FAX: 81-45-412-4507

### KOREA

ROOM 208-37  
INCHEON INDUSTRIAL GOODS  
CIRCULATING CENTER  
SONGHYEON 3-DONG, DONG-GU  
INCHEON, KOREA, 401-705  
PHONE: 82 32 588 3253  
FAX: 82 32 588 3254

### MÉXICO

KM. 2.0 BLVD. AEROPUERTO  
LEÓN 37545, GUANAJUATO,  
MÉXICO  
PHONE: 52 477 761 2030  
FAX: 52 477 761 2010

### MIDDLE EAST & NORTH AFRICA

VSE INTERNATIONAL CORP.  
3233 NORTH ARLINGTON HEIGHTS  
SUITE 100W  
ARLINGTON HEIGHTS, IL 60004  
PHONE: 847 590 5547

### SINGAPORE

51 KAKI BUKIT ROAD 2  
K B WAREHOUSE COMPLEX  
SINGAPORE 417863  
PHONE: (65) 6 744 2572  
FAX: (65) 6 747 1708

### SWITZERLAND

POSTFACH 73  
SCHUTZENSTRASSE 59  
CH-8245 FEUERTHALEN  
SWITZERLAND  
PHONE: +41 52 647 4700  
FAX: +41 52 659 2394

### TAIWAN

4F, NO. 25, SEC. 1,  
TUNHUA S ROAD,  
TAIPEI 10557, TAIWAN, R.O.C.  
PHONE: (886-2) 2577-4352  
FAX: (886-2) 2577-4157

### UNITED KINGDOM

6 BRISTOL DISTRIBUTION PARK  
HAWKLEY DRIVE  
BRISTOL BS32 0BF U.K.  
PHONE: +44 1454 85 0000  
FAX: +44 1454 85 9001

# BALDOR

P.O. Box 2400 • Fort Smith, AR 72902-2400 U.S.A.

Ph: (479) 646-4711 • Fax (479) 648-5792

International Fax (479) 648-5895

www.baldor.com