

ABB BALDOR RELIANCE III

Customer information packet

ANFL3514M

1.5HP, 1750RPM, 1PH, 60HZ, 56YZ, 3532LC, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56YZ
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	1.500 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.000 A @ 115.0 V 6.500 A @ 230.0 V 7.100 A @ 208.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	80.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	Multiple Flats
Heater Indicator	No Heater
High Voltage Full Load Amps	6.5 a
Insulation Class	F

Part Detail

Revision	A
Type	AC
Mech. spec.	35R216
Base	
Status	PRD/A
Elec. spec.	35WGZ997
Layout	35LYR216
Eff. date	01-09-2026
CD Diagram	CD0320
Poles	04
Leads	4#16 A&J,2#18 B PH,1#14 #4TH
Proprietary	False
Created date	11-14-2024

Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	4 @ 16 AWG, A&J
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3532LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	14.43 IN
Power Factor	95
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Other
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Manual Thermal Overload
Winding Thermal 1 Location	KO
Winding Thermal 2	None

Nameplate

NP1280L											
CAT.NO.	ANFL3514M										
SPEC.	35R216Z997										
HP	1.5										
VOLTS	115/230										
AMP	13/6.5										
RPM	1750										
FRAME	56YZ		HZ	60		PH		1			
SER.F.	1.00		CODE	J		DES	L		CL	F	
NEMA-NOM-EFF	80		PF	95							
RATING	40C AMB-CONT										
CC											
DE	6203		ODE	6203							
ENCL	TEFC		SN								

Accessories

Part number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 109371

Typical performance - not guaranteed values

Winding: 35WGZ997-R008			Type: 3532LC		Enclosure: TEFC		
Nameplate Data			115 V, 60 Hz: Low Voltage Connection				
Rated Output (HP)		1.5	Full Load Torque		4.597 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		13/6.5	Breakdown Torque		11.5 LB-FT		
R.P.M.		1750	Pull-up Torque		9.24 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		11.6 LB-FT	
NEMA Design Code		L	KVA Code	J	Starting Current		93.9 A
Service Factor (S.F.)		1	No-load Current		3.64 A		
NEMA Nom. Eff.		80	Power Factor	95	Line-line Res. @ 25°C		2.1749 Ω A Ph 1.8972 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		64°C	

Load Characteristics 115 V, 60 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	78	89	93	95	95	95
Efficiency	64.7	76.4	80.1	80.5	79.1	75.6
Speed	1788.1	1776.5	1764.6	1750.3	1735.8	1712.2
Line amperes	4.97	7.32	9.99	13	16.1	20.2


ABB Motors and Mechanical Inc.

WINDING # 35WGZ997

Typical performance - not guaranteed values.


1.5 HP 1 PH 60 HZ 1750 RPM 115 V 3532LC

TORQUES (LB-FT): PO=11.5 PU=9.24 LR=11.6 LRA=93.9

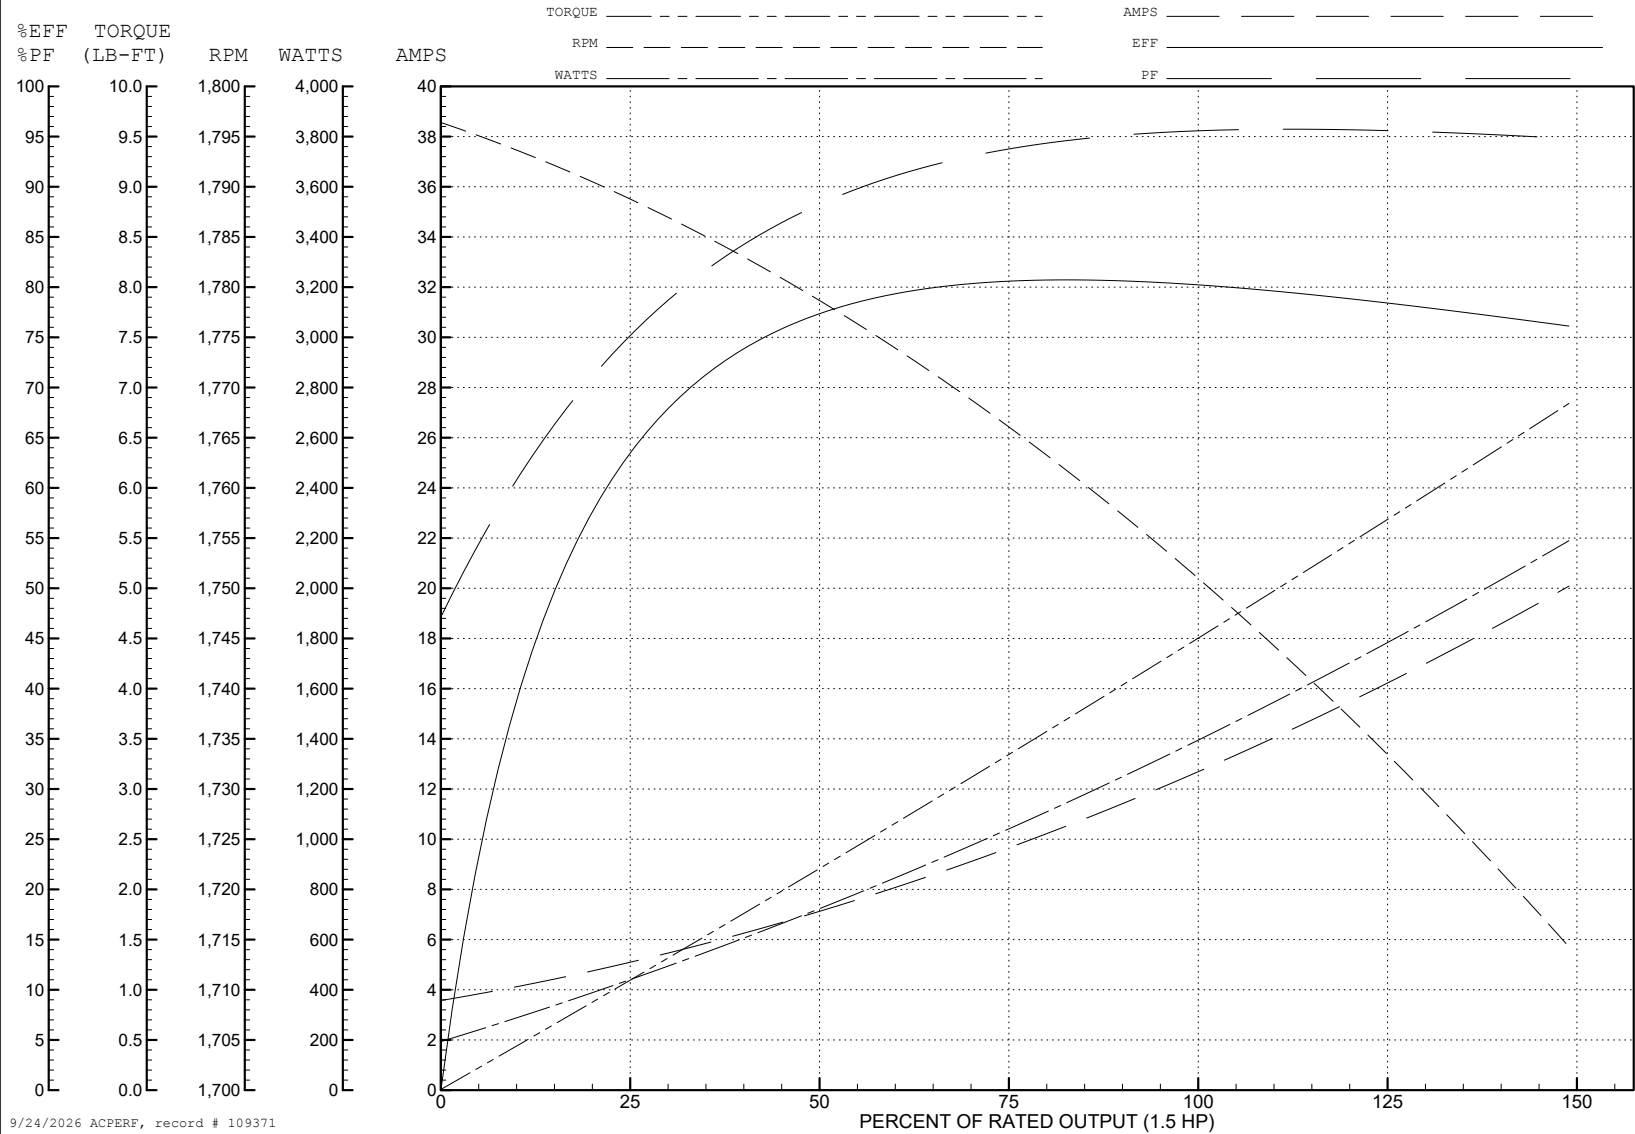



CD0320

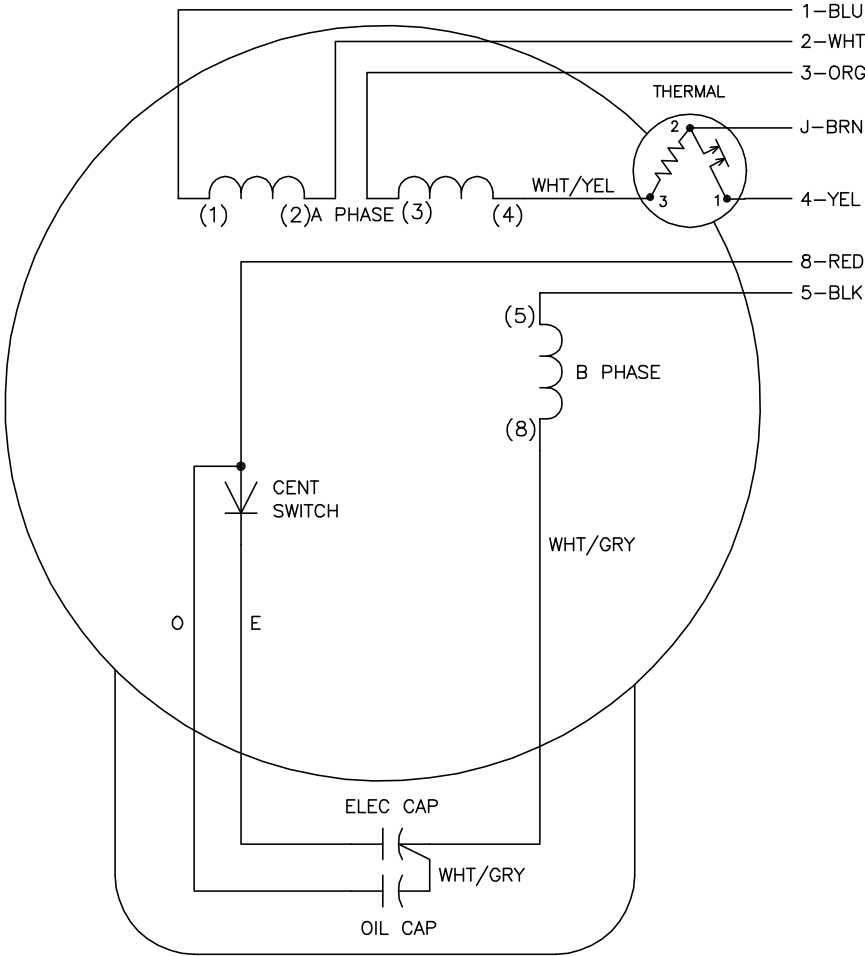

	LINE A	LINE B	JOIN	JOIN
HIGH STD	1,8	4	2,3,5	J
HIGH OPP	1,5	4	2,3,8	J
LOW STD	1,3,8	4	—	2,J,5
LOW OPP	1,3,5	4	—	2,J,8

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0320

REV. DESC: ADD INTERNAL CONNECTION TO HELP MANUFACTURING		
REV. LTR: G	VERSION: 01	TDR: 000000941594
FILE: \AAA\00007\422	REVISED: 02: 21: 00 08/28/2015	BY: ENALEMO
MTL: —	© □	

BALDOR

TYPE LC, DV, REV, THERMAL, B PH AMPS THRU HTR HVC, 7 LEAD
SH 1 of 1