



---

# Customer information packet

## AOM3535

.33HP, 1140RPM, 3PH, 60HZ, 56, 3414M, TEAO, F1

Class - None

Division - Not Applicable

## Specifications

Enclosure	TEAO
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.330 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	208.0 V @ 60 HZ 230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.100 A @ 208.0 V 1.900 A @ 208.0 V 1.800 A @ 230.0 V .900 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	70.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard

## Part detail

Revision	D
Type	AC
Mech. spec.	34T045
Base	
Status	PRD/A
Elec. spec.	34WG5883
Layout	34LYT045
Eff. date	02-08-2024
CD Diagram	CD0005
Poles	06
Leads	9#18
Proprietary	False
Created date	11-20-2007

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	0.9 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3414M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	10.25 IN
Power Factor	51
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1140 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1

None

---

Winding Thermal 2

None

---

**Nameplate**

<b>NP1256L</b>										
<b>CAT.NO.</b>	AOM3535									
<b>SPEC.</b>	34T045-5883G2									
<b>HP</b>	.33									
<b>VOLTS</b>	208-230/460									
<b>AMP</b>	1.9-1.8/.9									
<b>RPM</b>	1140									
<b>FRAME</b>	56		<b>HZ</b>	60		<b>PH</b>	3			
<b>SER.F.</b>	1.00	<b>CODE</b>	K	<b>DES</b>	B	<b>CLASS</b>	F			
<b>NEMA-NOM-EFF</b>	70	<b>PF</b>	51							
<b>RATING</b>	40C AMB-CONT									
<b>CC</b>										
<b>DE</b>	6203		<b>ODE</b>	6203						
<b>ENCL</b>	TEAO	<b>SN</b>								

**AC Induction Motor Performance Data**

Record # 36354

Typical performance - not guaranteed values

<b>Winding: 34WG5883-R015</b>		<b>Type: 3414M</b>		<b>Enclosure: TEAO</b>	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	.33	<b>Full Load Torque</b>	1.5 LB-FT		
<b>Volts</b>	208-230/460	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	1.9-1.8/.9	<b>Breakdown Torque</b>	5.5 LB-FT		
<b>R.P.M.</b>	1140	<b>Pull-up Torque</b>	4.2 LB-FT		
<b>Hz</b>	60 <b>Phase</b>	3	<b>Locked-rotor Torque</b>	4.45 LB-FT	
<b>NEMA Design Code</b>	B <b>KVA Code</b>	K	<b>Starting Current</b>	3.65 A	
<b>Service Factor (S.F.)</b>		1	<b>No-load Current</b>	0.75 A	
<b>NEMA Nom. Eff.</b>	70 <b>Power Factor</b>	51	<b>Line-line Res. @ 25°C</b>	58.3 Ω	
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>		
			<b>Locked-rotor Power Factor</b>	66	
			<b>Rotor inertia</b>	0.0333 LB-FT <sup>2</sup>	

**Load Characteristics 460 V, 60 Hz, 0.33 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>
<b>Power Factor</b>	19	30	42	51	58	64
<b>Efficiency</b>	44	58	66	70	71	72
<b>Speed</b>	1185	1170	1155	1135	1120	1095
<b>Line amperes</b>	0.75	0.8	0.85	0.9	0.95	1.05


ABB Motors and Mechanical Inc.

WINDING # 34WG5883


0.33 HP 3 PH 60 HZ 1140 RPM 460 V 3414M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=5.5 PU=4.2 LR=4.45 LRA=3.65

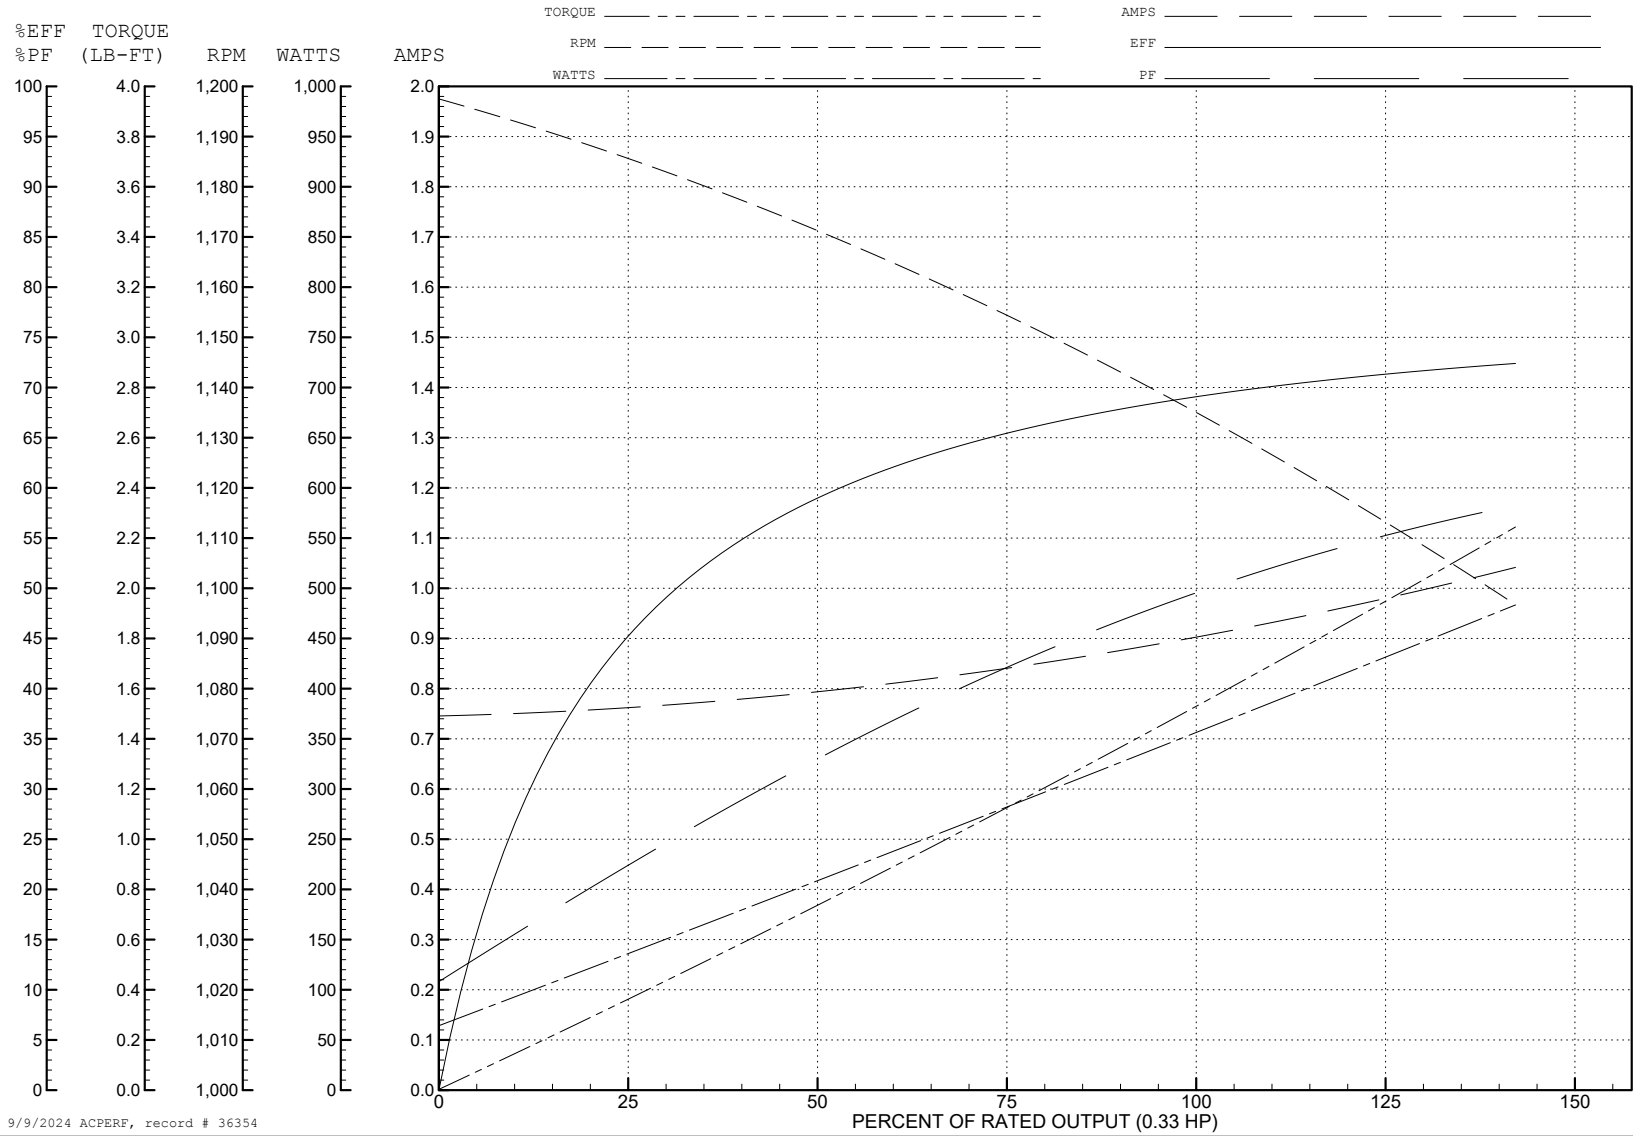

34LYT045

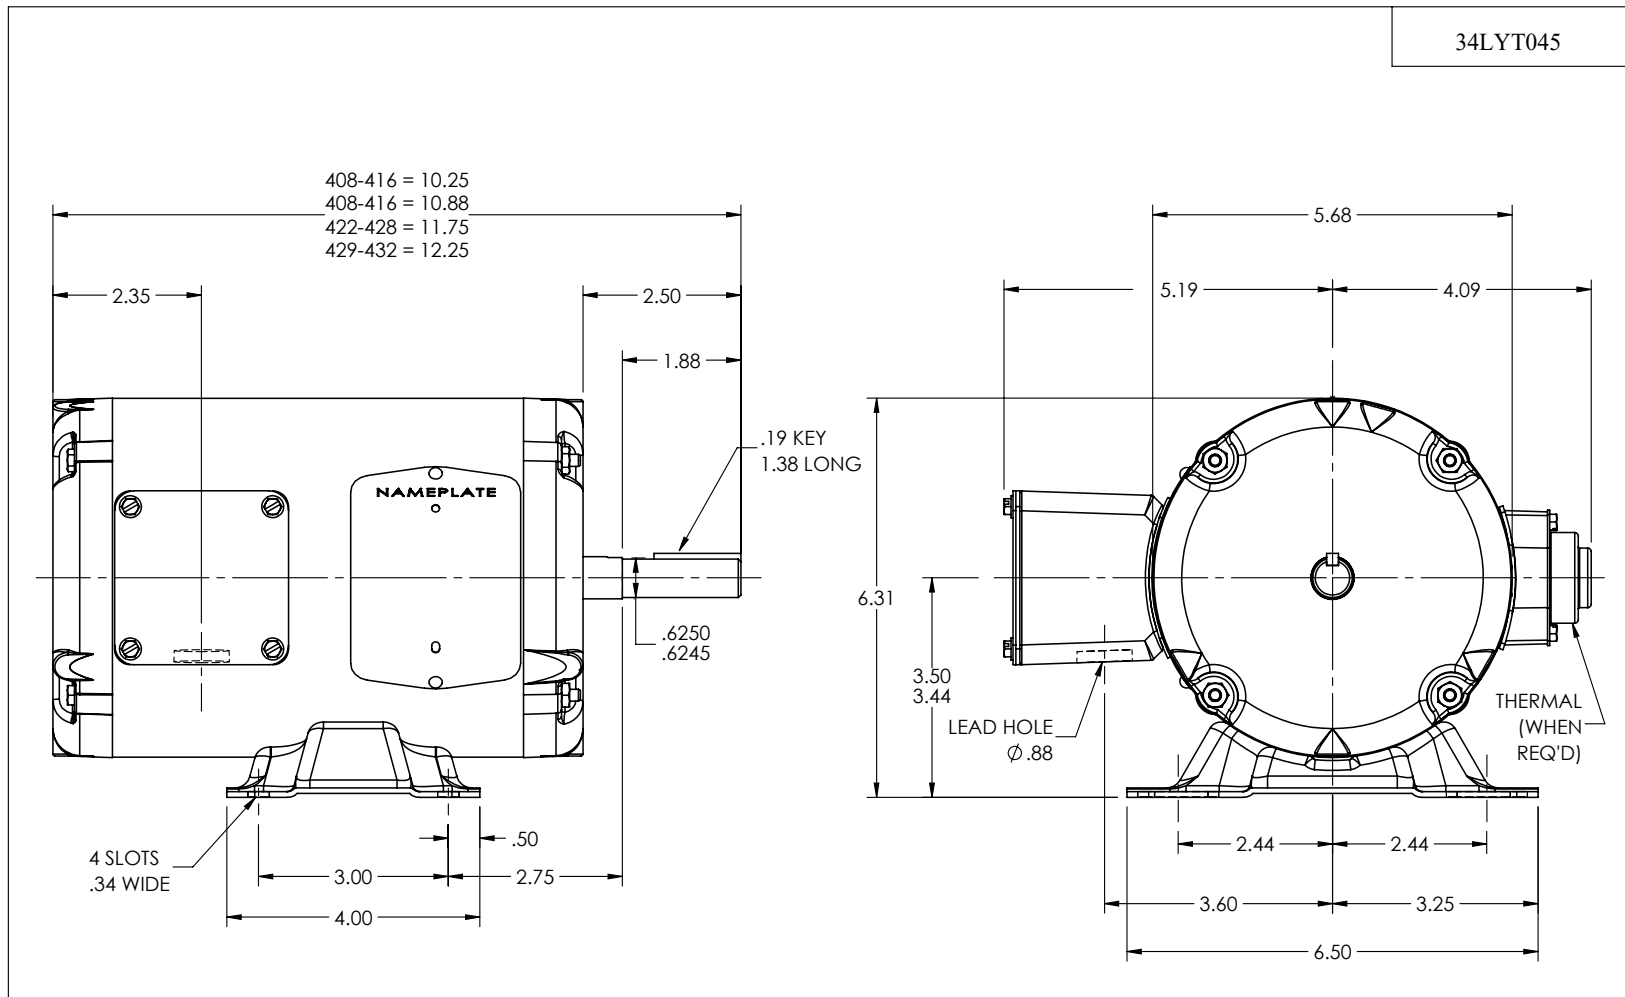

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: LOAD TO SOLIDWORKS - REV D			
REV: E	VERSION: 02	REVISED: 03:33:19 01/03/2023	TDR: 000001201165
34LYT045	MODEL NO. 34LYT045	REF: -	
	BY: ENFRAJ0		

**BALDOR - RELIANCE®**

STD HORZ MODEL 34M NEMA 56 TEAO

34LYT045



CD0005



LOW VOLTAGE (2Y)



LINE

HIGH VOLTAGE (1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS