



Customer information packet

AOM3614T

2HP, 1160RPM, 3PH, 60HZ, 184T, 3628M, TEAO, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEAO
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ 208.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	6.900 A @ 208.0 V 6.800 A @ 230.0 V 3.400 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	81.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part detail

Revision	J
Type	AC
Mech. spec.	36G256
Base	
Status	PRD/A
Elec. spec.	36WGS950
Layout	36LYG256
Eff. date	01-05-2026
CD Diagram	CD0005
Poles	06
Leads	9#16 36"LONG Y
Proprietary	False
Created date	09-17-2012

Heater Indicator	No Heater
High Voltage Full Load Amps	3.4 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3628M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	15.00 IN
Power Factor	68
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1160 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1

None

Winding Thermal 2

None

Nameplate

NP1256L									
CAT.NO.	AOM3614T								
SPEC.	36G256S950G1								
HP	2 AIR OVER								
VOLTS	208-230/460								
AMP	6.9-6.8/3.4								
RPM	1160								
FRAME	184T		HZ	60		PH	3		
SER.F.	1.00	CODE	J	DES	B	CLASS	F		
NEMA-NOM-EFF	81.5	PF	68						
RATING	40C AMB-CONT								
CC									
DE	6206		ODE	6205					
ENCL	TEAO	SN							
	1250 FPM AT 100CFM								

Accessories

Part number	Description	Multiplier
36-3301	C FACE KIT	A8
36EP1304A62SP	FLANGE MTD ENDPLATE 182-4TD -ENCL (LESS	A8

AC Induction Motor Performance Data

Record # 39808

Typical performance - not guaranteed values

Winding: 36WGS950-R002		Type: 3628M	Enclosure: TEAO
Nameplate Data		460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	2	Full Load Torque	9.02 LB-FT
Volts	208-230/460	Start Configuration	direct on line
Full Load Amps	6.9-6.8/3.4	Breakdown Torque	29.8 LB-FT
R.P.M.	1160	Pull-up Torque	15.36 LB-FT
Hz	60 Phase	Locked-rotor Torque	19.03 LB-FT
NEMA Design Code	B KVA Code	Starting Current	19.4 A
Service Factor (S.F.)	1	No-load Current	2.16 A
NEMA Nom. Eff.	81.5 Power Factor	Line-line Res. @ 25°C	8.72 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	65°C
		Locked-rotor Power Factor	38.5
		Rotor inertia	0.263 LB-FT ²

Load Characteristics 460 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	30	47	59	68	72	76
Efficiency	69.3	79.1	81.5	81.8	80.1	78
Speed	1191	1183	1173	1162	1150	1133
Line amperes	2.24	2.49	2.88	3.35	4.01	4.72


ABB Motors and Mechanical Inc.

WINDING # 36WGS950


Typical performance - not guaranteed values.

2 HP 3 PH 60 HZ 1160 RPM 460 V 3628M


TORQUES (LB-FT): PO=29.8 PU=15.36 LR=19.03 LRA=19.4

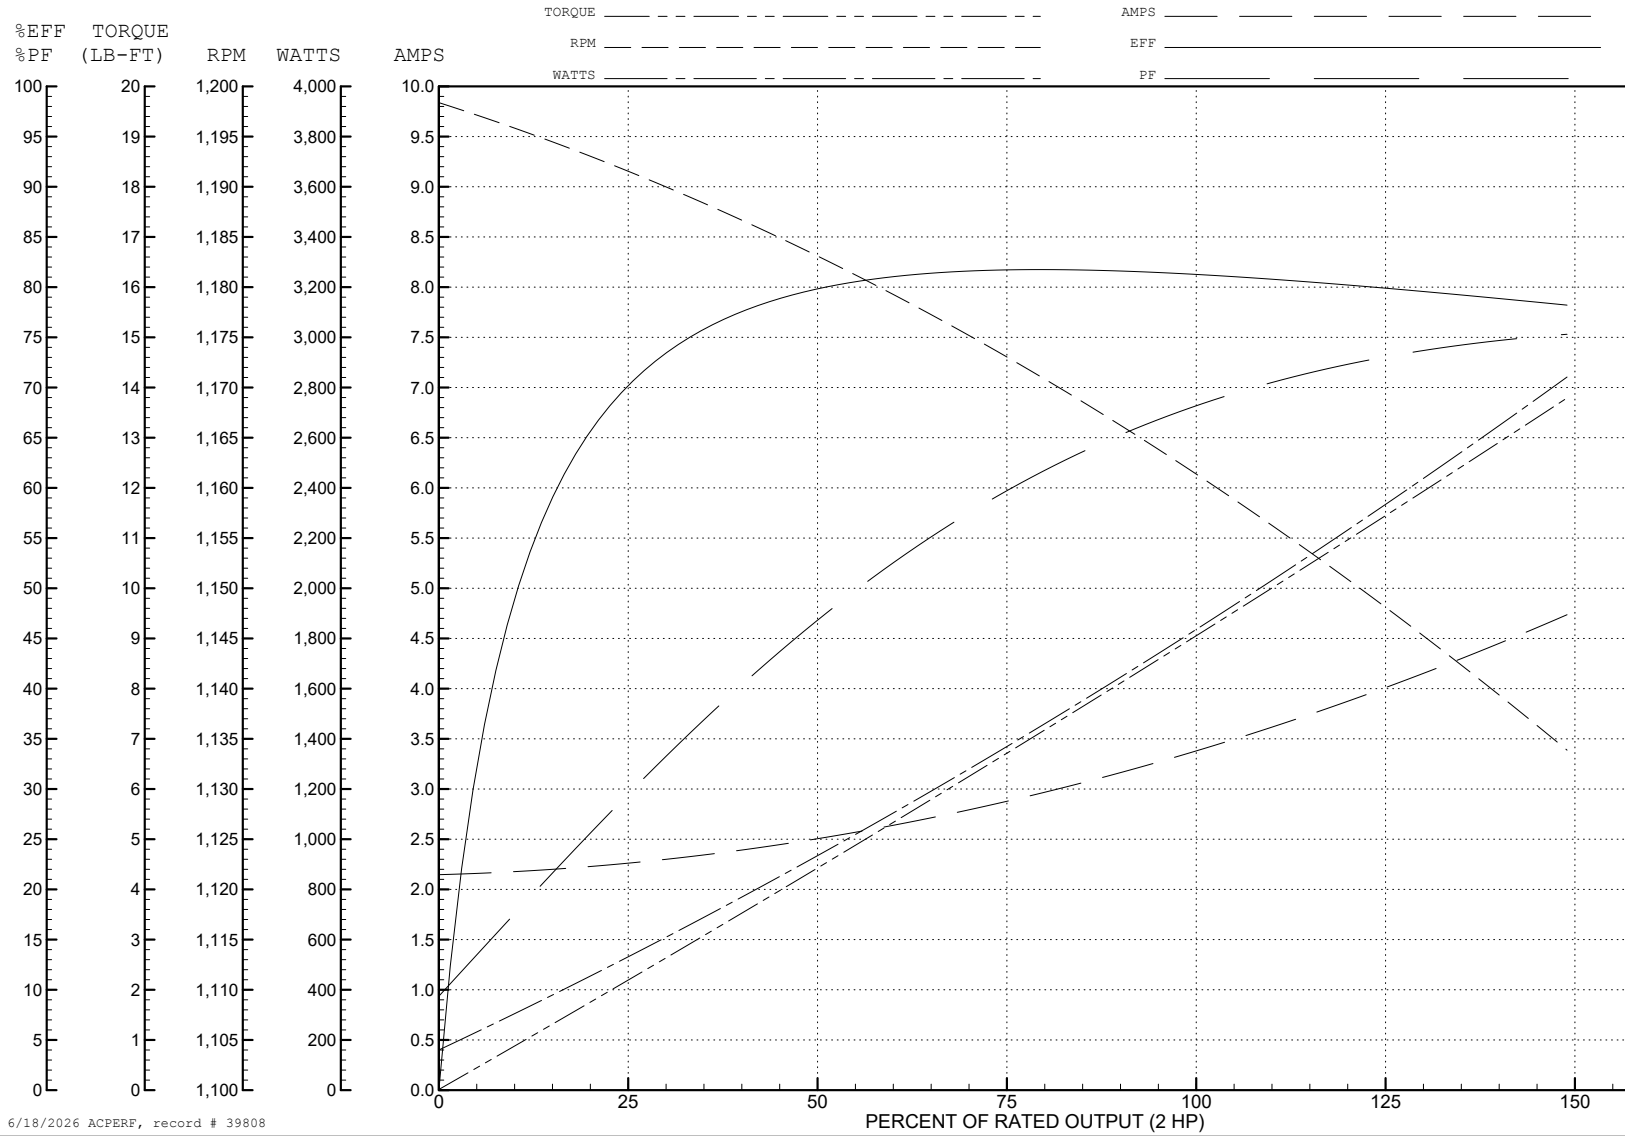

6/18/2026 ACPERF, record # 39808

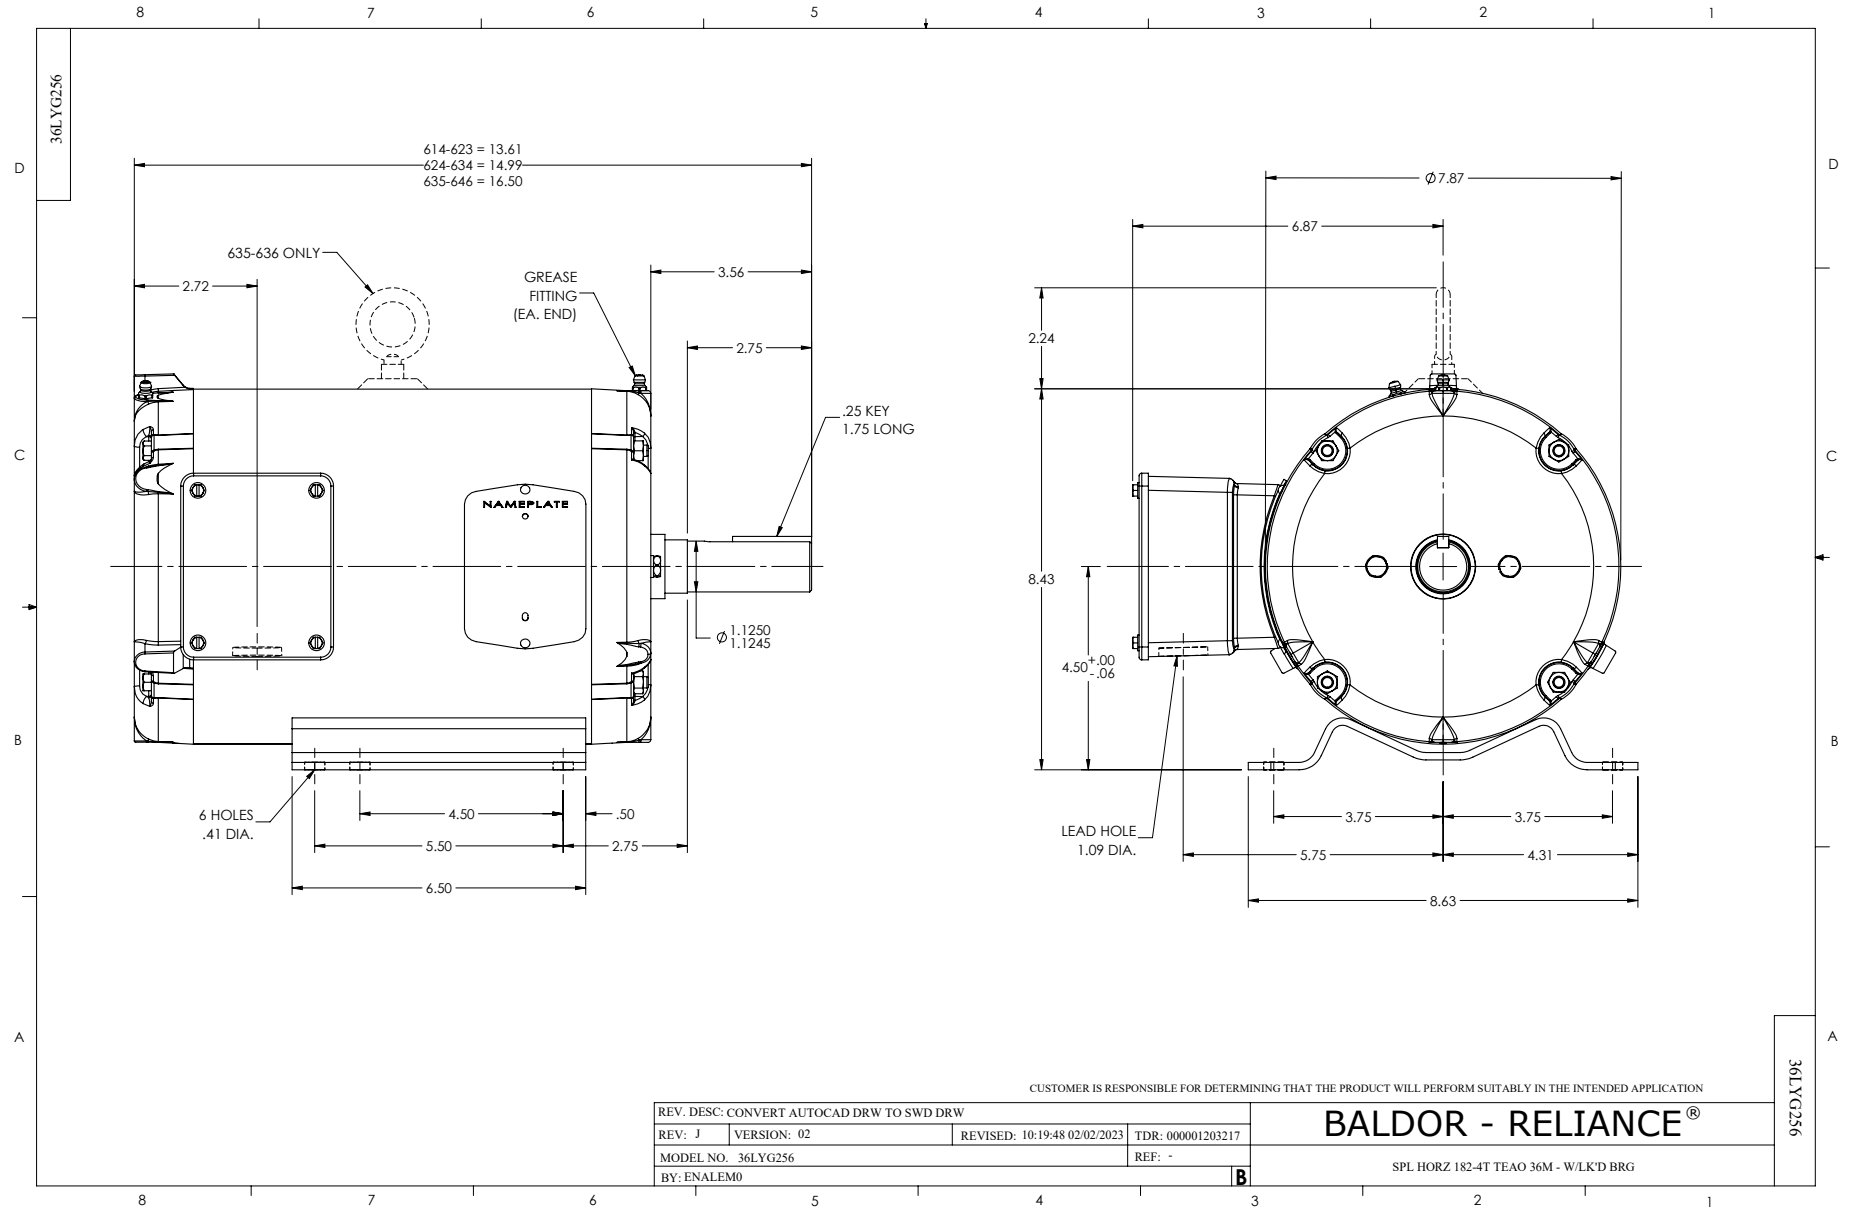

CD0005

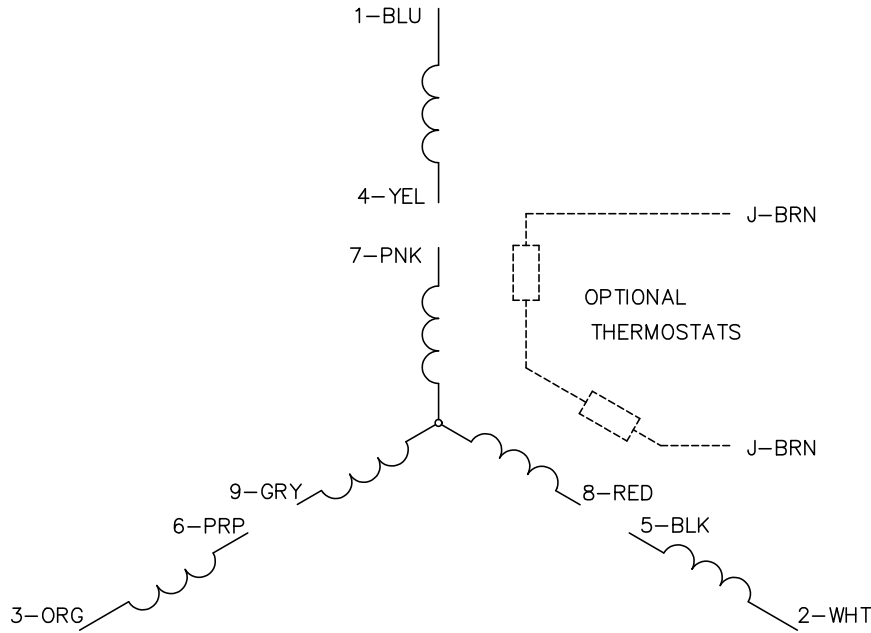


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)

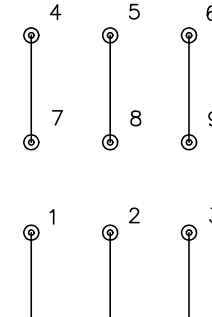

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005