ABB BALDOR RELIANCE

Customer information packet

AOM3614T

2HP, 1160RPM, 3PH, 60HZ, 184T, 3628M, TEAO, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/3/2026 2:26:28 AM

Specifications

Enclosure	TEAO
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	230.0 V @ 60 HZ
	208.0 V @ 60 HZ
Agency Approvals	CSA
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	6.900 A @ 208.0 V
	6.800 A @ 230.0 V
	3.400 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	81.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	J
Type	AC
Mech. spec.	36G256
Base	
Status	PRD/A
Elec. spec.	36WGS950
Layout	36LYG256
Eff. date	01-05-2026
CD Diagram	CD0005
Poles	06
Leads	9#16 36"LONG Y
Proprietary	False
Created date	09-17-2012

Heater Indicator	No Heater
High Voltage Full Load Amps	3.4 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3628M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	15.00 IN
Power Factor	68
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1160 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L											
CAT.NO.	AOM3614T										
SPEC.	36G256S950G1										
HP	2 AIR OVER										
VOLTS	208-230/460										
AMP	6.9-6.8/3.4										
RPM	1160										
FRAME	184T		**HZ**	60			**PH**	3			
SER.F.	1.00	**CODE**	J	**DES**	B	**CLASS**	F				
NEMA-NOM-EFF	81.5	**PF**	68								
RATING	40C AMB-CONT										
CC											
DE	6206		**ODE**	6205							
ENCL	TEAO	**SN**									
	1250 FPM AT 100CFM										

Accessories

Part number	Description	Multiplier
36-3301	C FACE KIT	A8
36EP1304A62SP	FLANGE MTD ENDPLATE 182-4TD -ENCL (LESS	A8


AC Induction Motor Performance Data
Record # 39808
Typical performance - not guaranteed values


Winding: 36WGS950-R002	**Type:** 3628M	**Enclosure:** TEAO

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			2	**Full Load Torque**	9.02 LB-FT
Volts			208-230/460	**Start Configuration**	direct on line
Full Load Amps			6.9-6.8/3.4	**Breakdown Torque**	29.8 LB-FT
R.P.M.			1160	**Pull-up Torque**	15.36 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	19.03 LB-FT
NEMA Design Code	B	**KVA Code**	J	**Starting Current**	19.4 A
Service Factor (S.F.)			1	**No-load Current**	2.16 A
NEMA Nom. Eff.	81.5	**Power Factor**	68	**Line-line Res. @ 25ºC**	8.72 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	65°C
				Locked-rotor Power Factor	38.5
				Rotor inertia	0.263 LB-FT2


Load Characteristics 460 V, 60 Hz, 2 HP


% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	30	47	59	68	72	76
Efficiency	69.3	79.1	81.5	81.8	80.1	78
Speed	1191	1183	1173	1162	1150	1133
Line amperes	2.24	2.49	2.88	3.35	4.01	4.72

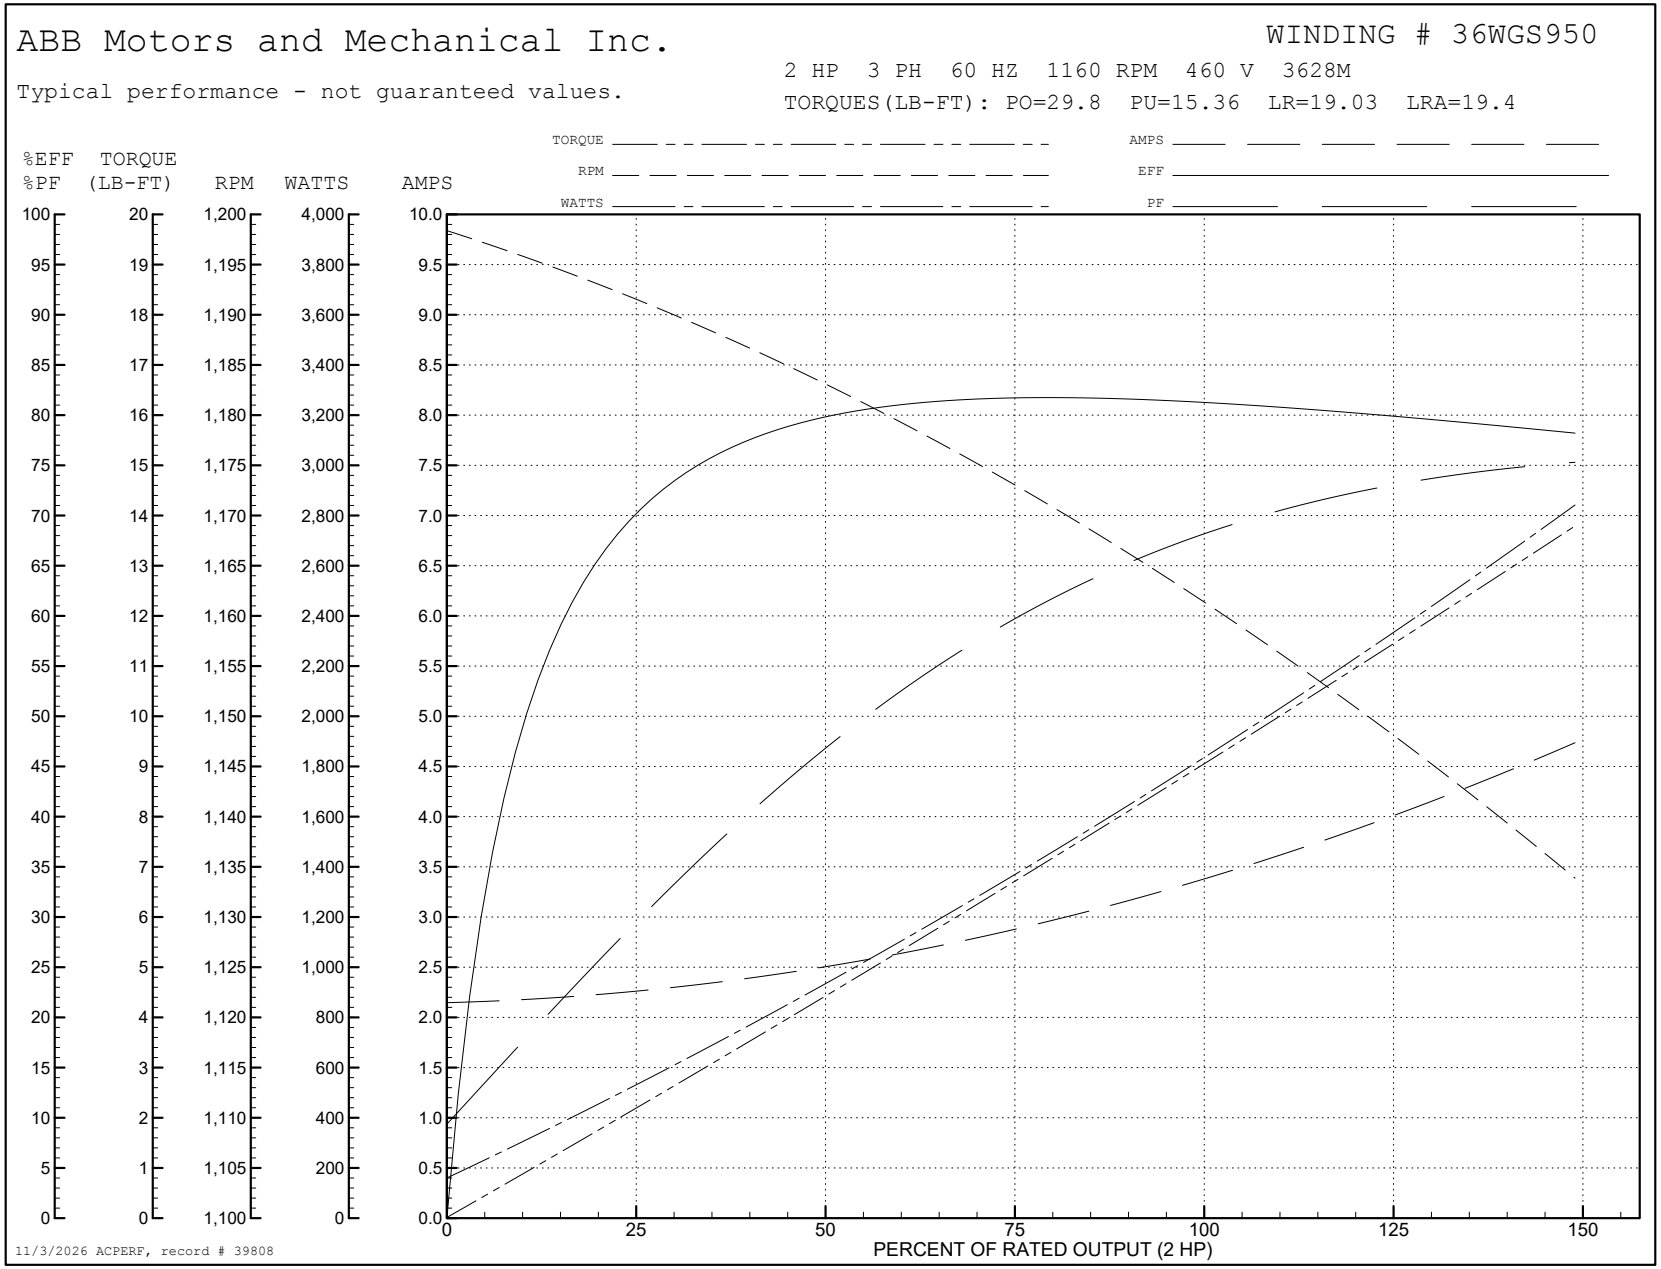
ABB Motors and Mechanical Inc.
WINDING # 36WGS950
Typical performance - not guaranteed values.
2 HP 3 PH 60 HZ 1160 RPM 460 V 3628M
TORQUES(LB-FT): PO=29.8 PU=15.36 LR=19.03 LRA=19.4
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (2 HP)
11/3/2026 ACPERF, record # 39808

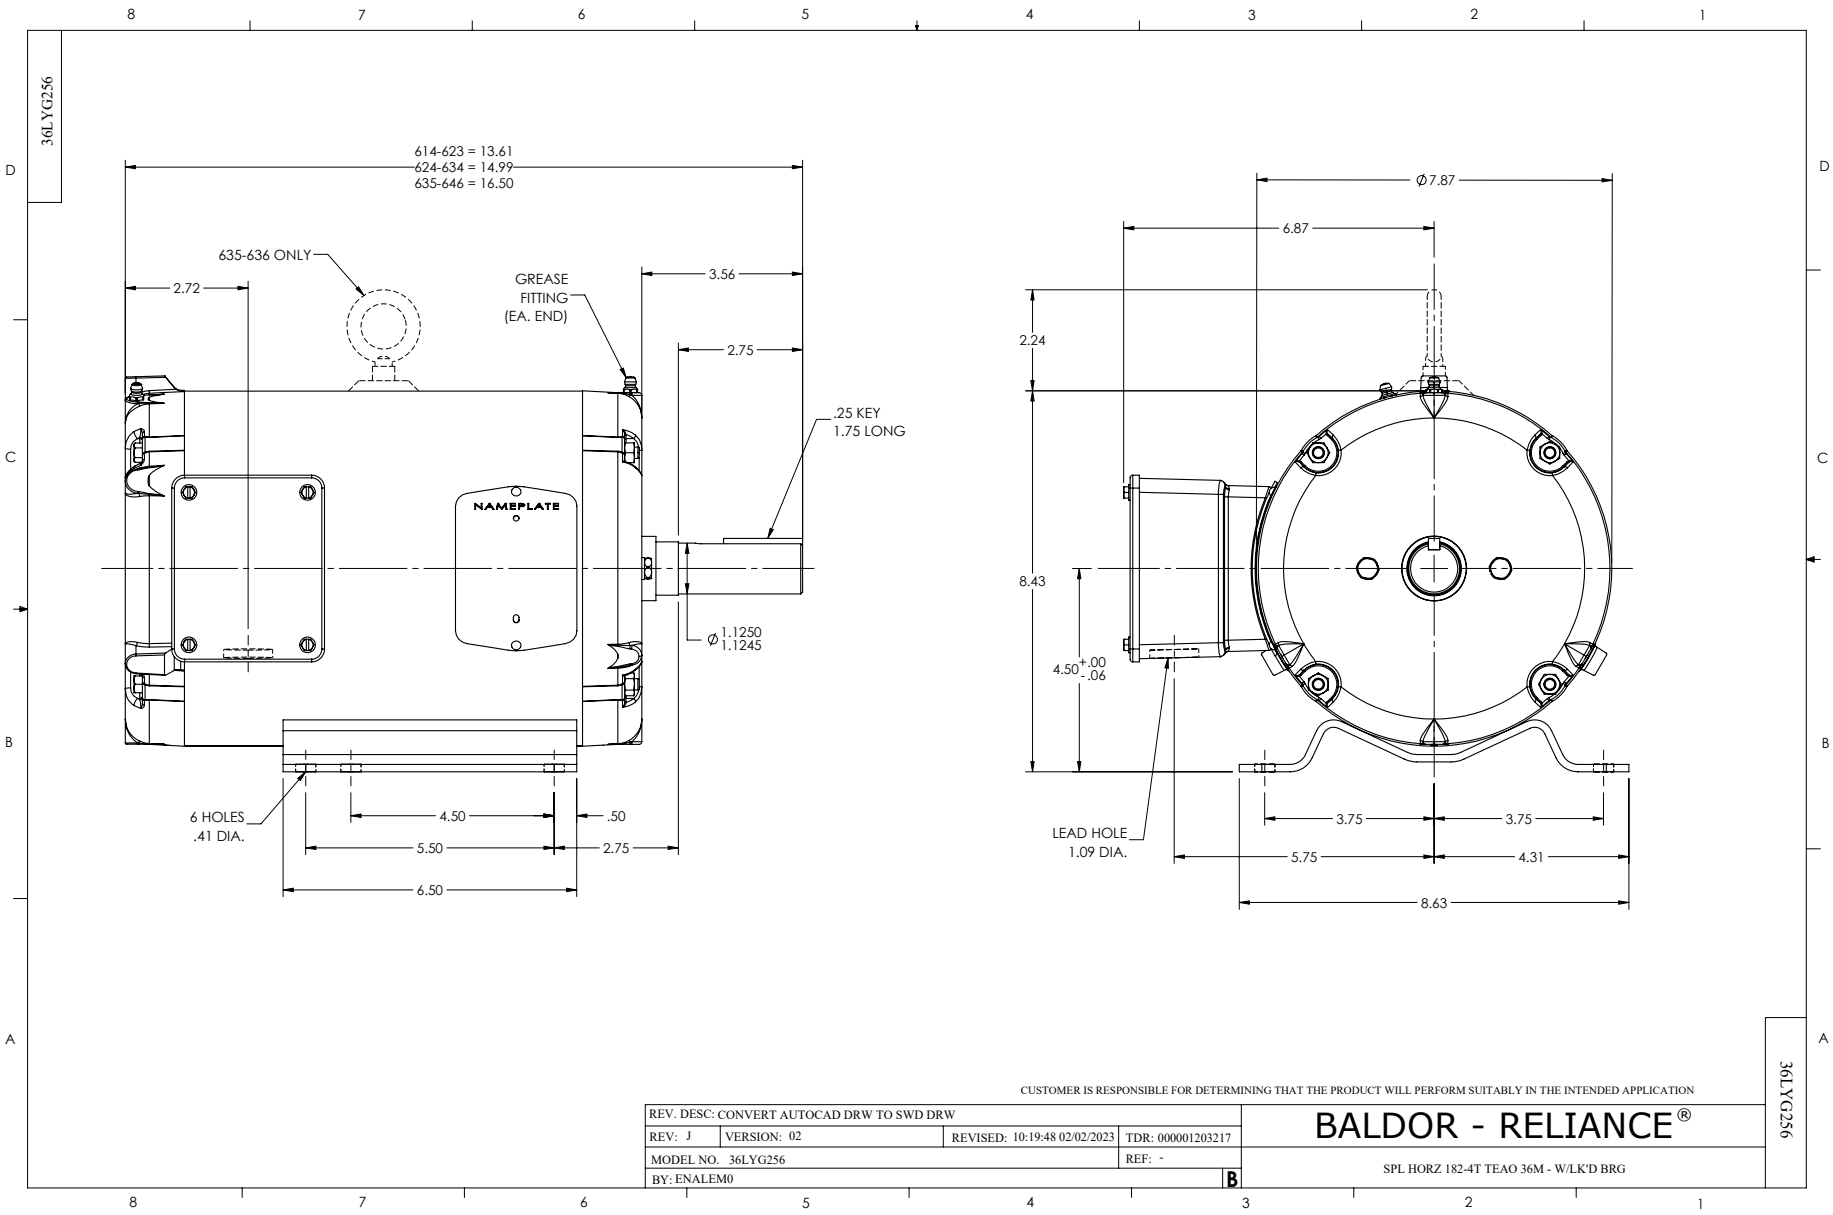
36LYG256
614-623 = 13.61
624-634 = 14.99
635-646 = 16.50
635-636 ONLY
2.72
GREASE FITTING (EA. END)
3.56
2.75
.25 KEY
1.75 LONG
NAMEPLATE
Ø 1.1250
1.1245
6 HOLES
.41 DIA.
4.50
.50
5.50
2.75
6.50
Ø7.87
6.87
2.24
8.43
4.50 +.00 -.06
LEAD HOLE
1.09 DIA.
3.75
3.75
5.75
4.31
8.63
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERT AUTOCAD DRW TO SWD DRW
REV: J
VERSION: 02
REVISED: 10:19:48 02/02/2023
TDR: 000001203217
MODEL NO. 36LYG256
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
SPL HORZ 182-4T TEAO 36M - W/LK'D BRG
36LYG256

CD0005

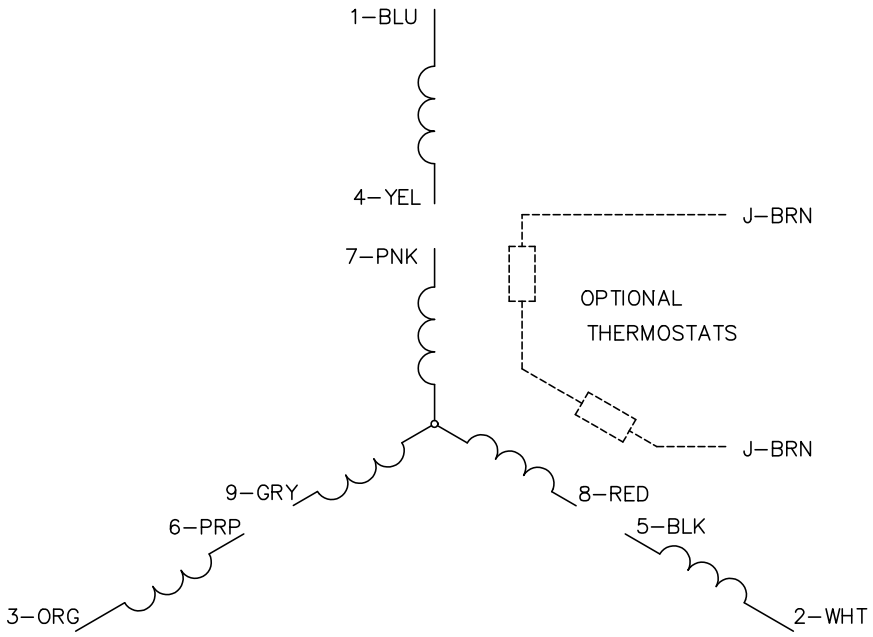

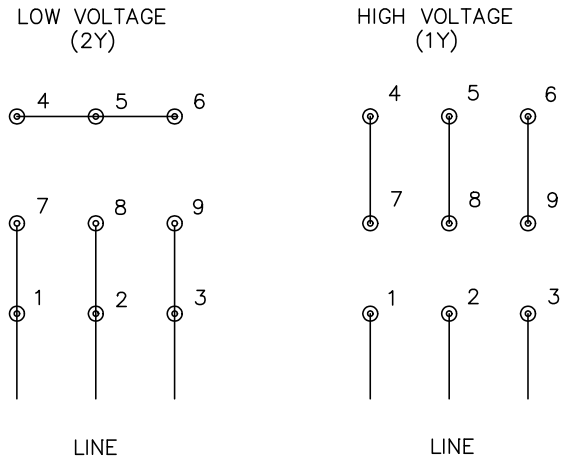

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS