ABB BALDOR RELIANCE

Customer information packet

CD6215

1.5HP, 1750RPM, DC, 184C, 3636D, TEFC, F1
Class - None
Division -

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/15/2026 12:53:48 PM

Specifications

Armature Voltage	180 V
Base Speed	1750 rpm
Enclosure	TEFC
Field Voltage	100 V
	200 V
Frame	184C
Frame Material	Steel
Haz Area Class and Group	None
Output Power	1.500 HP
Agency Approvals	CSA
	UR
Ambient Temperature	40 °C
Armature Current	7.5 a
Armature Inertia	30.342 lb-ft2
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	SHUNT
Heater Indicator	No Heater
Lifting Lugs	Standard Lifting Lugs
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	4 @ 18 AWG
	2 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	17.41 IN
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
RoHS Status	ROHS COMPLIANT

Part Detail

Revision	Z
Type	DC
Mech. spec.	36-5257
Base	
Status	PRD/A
Elec. spec.	36WGZ106
Layout	36LY5257
Eff. date	11-12-2024
CD Diagram	CD0860C01
Poles	00
Leads	
Proprietary	False
Created date	01-01-0001

Service Factor	1.00
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger

Nameplate

NP0111L					
CAT.NO.	CD6215				
SPEC.	36-5257Z106				
HP	1.5	**ENCL**	TEFC		
RPM	1750				
FRAME	184C	**TYPE**	3636D		
ARM V	180	**ARM A**	7.5		
FLD V	200/100	**FLD A**	.25/.5		
INSUL	F	**AMB.**	40		
DUTY	CONT	**SUPPLY**	----		
BRG/DE	6206	**BRG/ODE**	6205		
BRUSHES	2/BP5125A01				
	BLANK				
SER.					
BLANK					
APRV-CSA	**APRV-UL**				

Accessories

Part number	Description	Multiplier
TK3600	TEFC TACH MTG.CONVERSION KIT	

DC Motor Performance Data
Record # 480
Typical performance - not guaranteed values

Winding: 36WGZ106-R001	**Type:** 3636D	**Enclosure:** TEFC

Nameplate Data	
Rated Output (HP)	1.5
R.P.M.	1750
Armature Volts	180
Armature Amps	7.5
Field Volts	200 / 100
Field Amps	0.25 / 0.5
Rating - Duty	40C AMB-CONT
Power Supply Code	K

General Characteristics	
Armature Resistance @ 25ºC	0.885 Ω
Commutating Winding Resistance @ 25ºC	0.698 Ω
Shunt Winding Resistance @ 25ºC	623 Ω

Load Characteristics at 180 Armature Volts, 200 Field Volts, 0.33 Field Amps

Load Point	1	2	3	4	5	6	7
Armature Amps	0.4	2	3.7	5.4	6.95	8.6	10.3
R.P.M.	1747	1718	1687	1660	1645	1629	1622
Torque (LB-FT)	0	1.125	2.25	3.375	4.5	5.625	6.75


ABB Motors and Mechanical Inc.

WINDING # 36WGZ106

1.5 HP DC 1750 RPM 180 V ARM 200/100 V FLD 3636D

ENCL: TEFC DUTY: CONT CL: F

Typical performance - not guaranteed values.

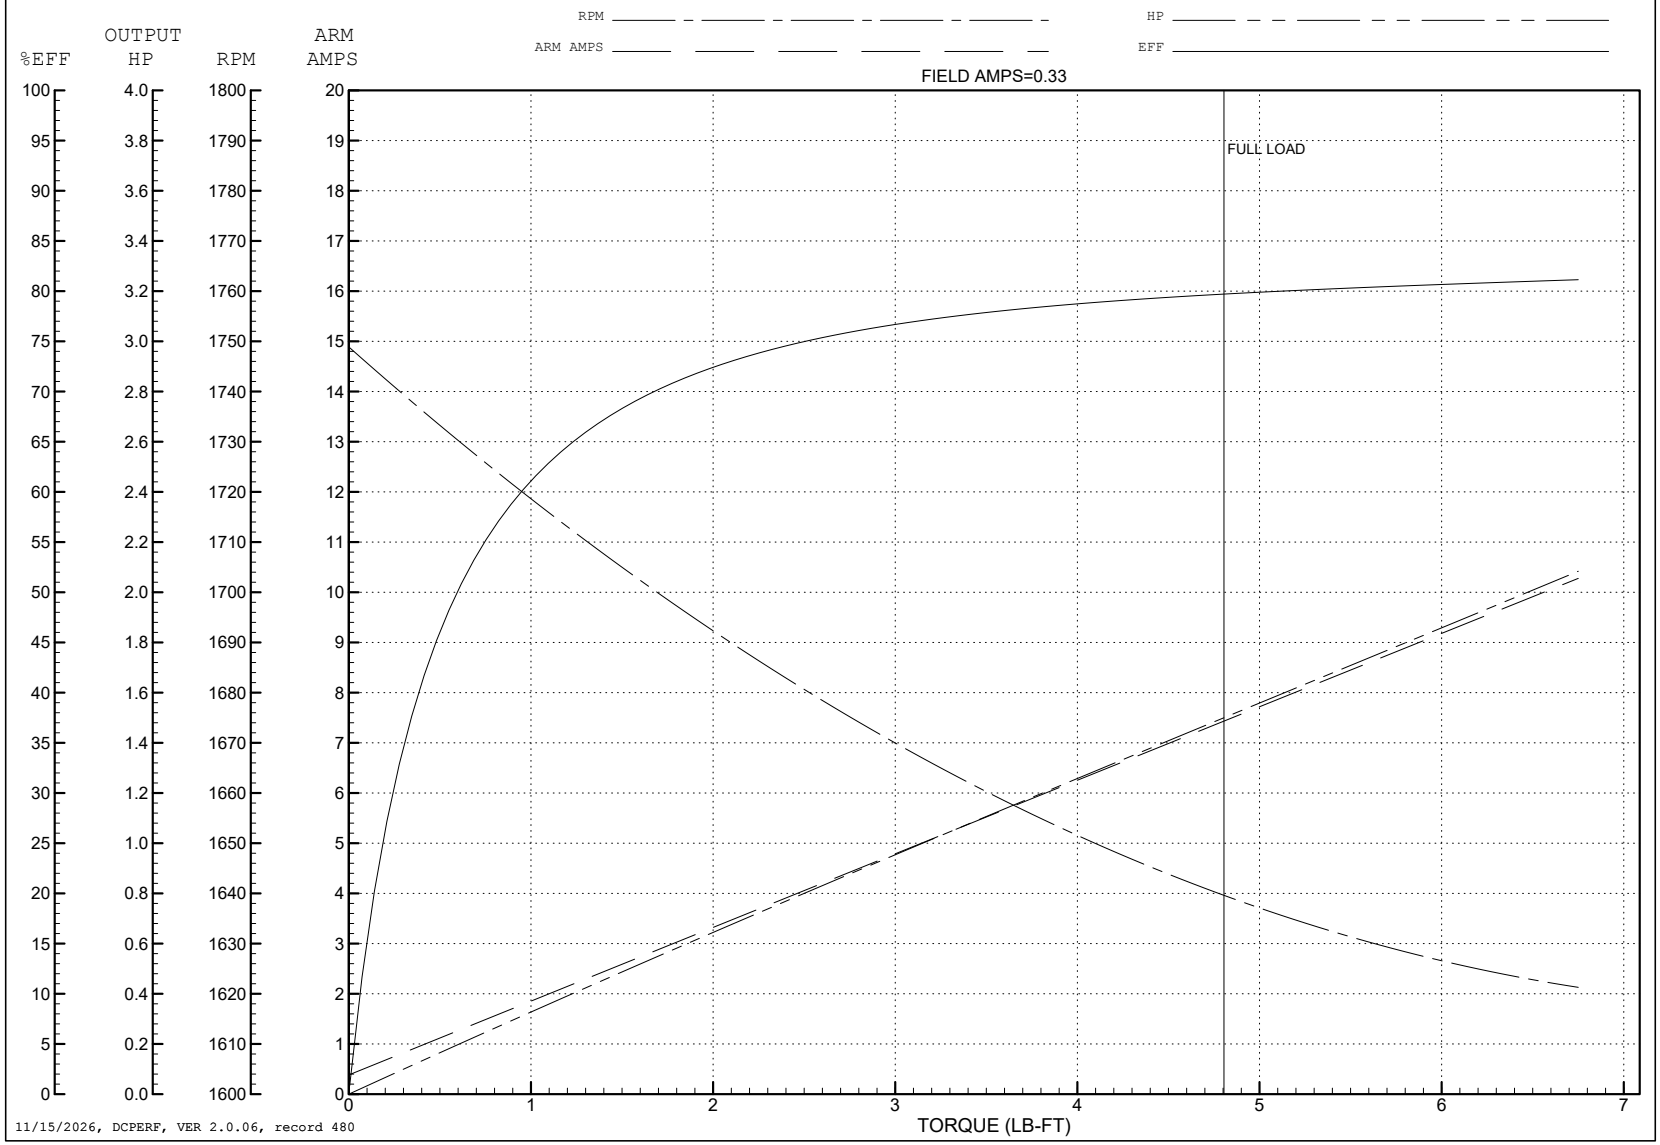

DC Motor Performance Data
Record # 2092
Typical performance - not guaranteed values


Winding: 36WGZ106-R001	**Type:** 3636D	**Enclosure:** TEFC


Nameplate Data	
Rated Output (HP)	1.5
R.P.M.	1750
Armature Volts	180
Armature Amps	7.5
Field Volts	200 / 100
Field Amps	0.25 / 0.5
Rating - Duty	40C AMB-CONT
Power Supply Code	K

General Characteristics	
Armature Resistance @ 25ºC	0.8797 Ω
Commutating Winding Resistance @ 25ºC	0.5855 Ω
Shunt Winding Resistance @ 25ºC	311.7 Ω
Armature Inductance	13.549 mH
Armature Inertia	30.342 LI^2

Load Characteristics at 180 Armature Volts, 200 Field Volts, 0.28 Field Amps


Load Point	**1**	**2**	**3**	**4**	**5**	**6**	**7**
Armature Amps	0.54	2	3.55	5.23	6.61	8.27	10.48
R.P.M.	1782	1788	1777	1769	1779	1778	1779
Torque (LB-FT)	0	1.13	2.26	3.39	4.5	5.63	6.75

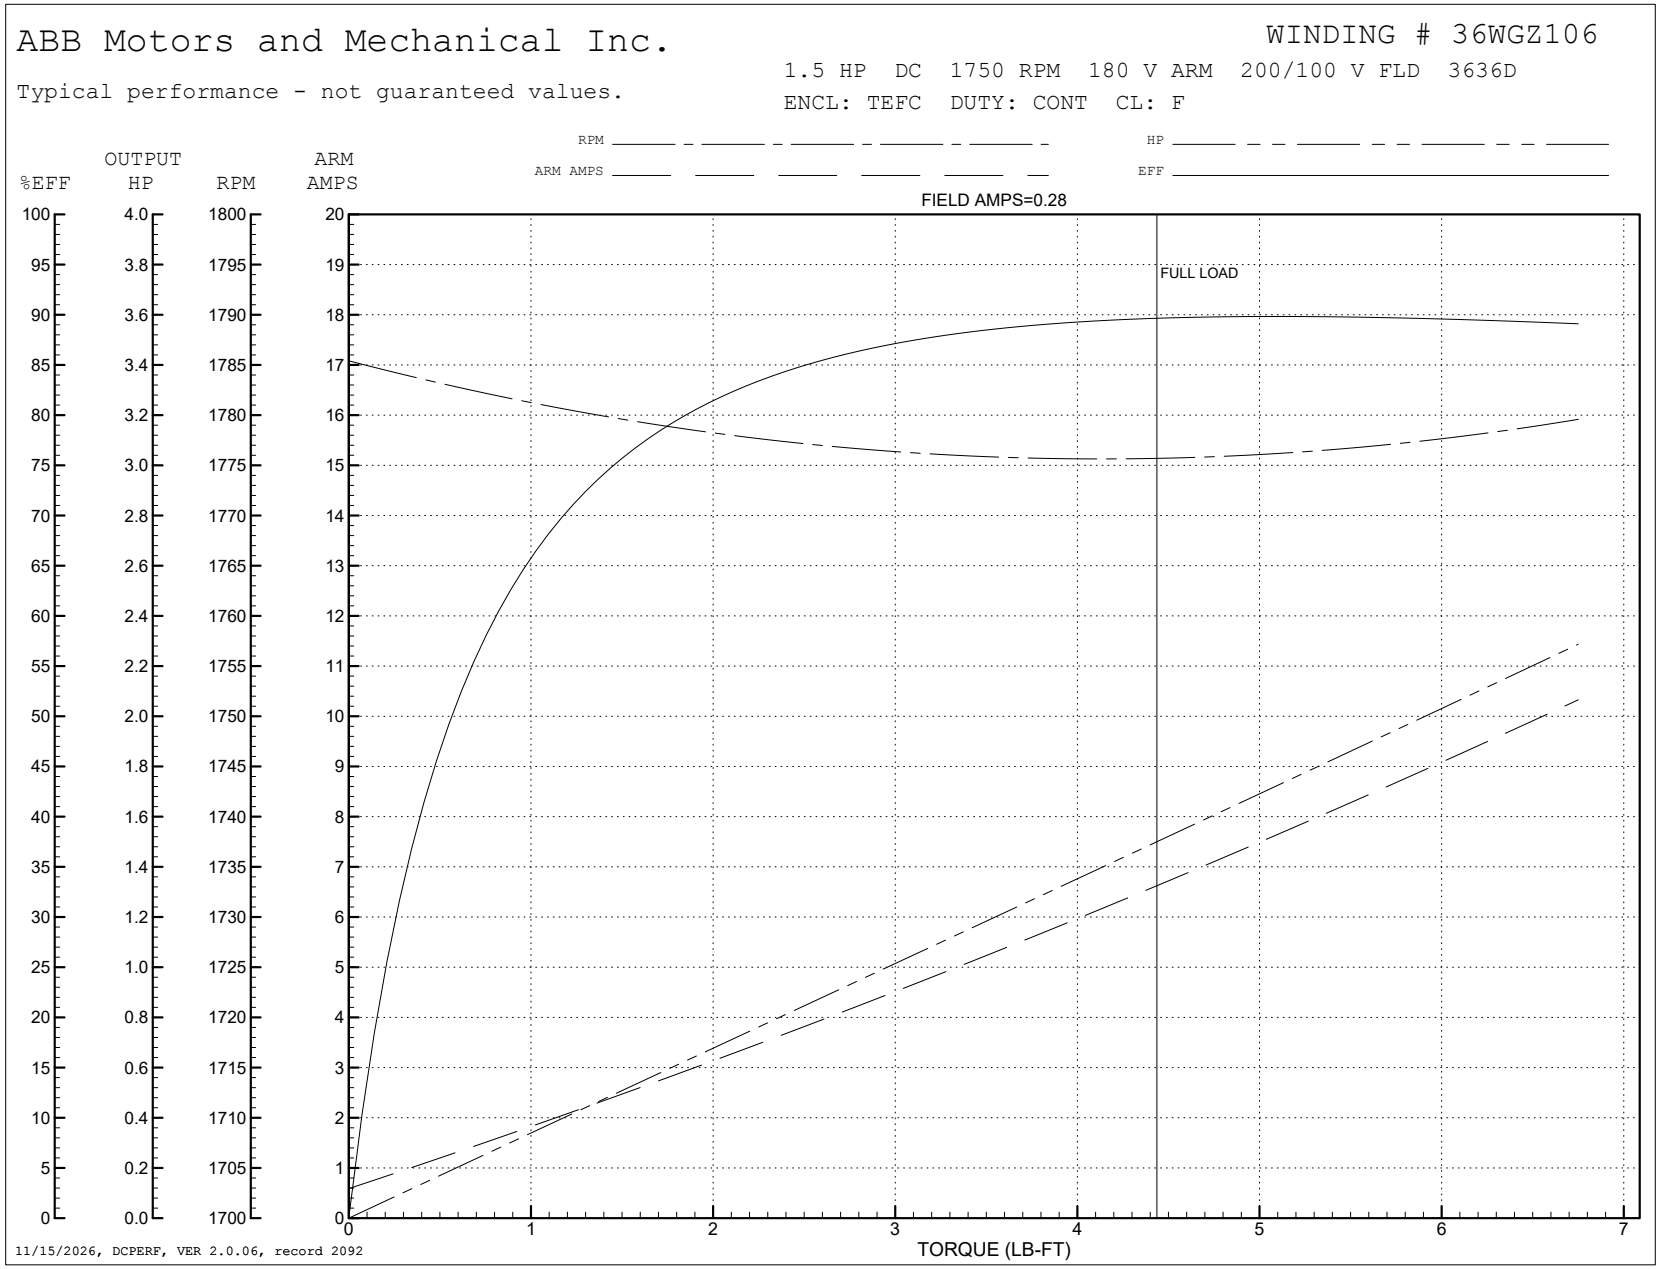
ABB Motors and Mechanical Inc.
WINDING # 36WGZ106
Typical performance - not guaranteed values.
1.5 HP DC 1750 RPM 180 V ARM 200/100 V FLD 3636D
ENCL: TEFC DUTY: CONT CL: F
RPM
HP
ARM AMPS
EFF
%EFF
OUTPUT HP
RPM
ARM AMPS
FIELD AMPS=0.28
FULL LOAD
TORQUE (LB-FT)
11/15/2026, DCPERF, VER 2.0.06, record 2092

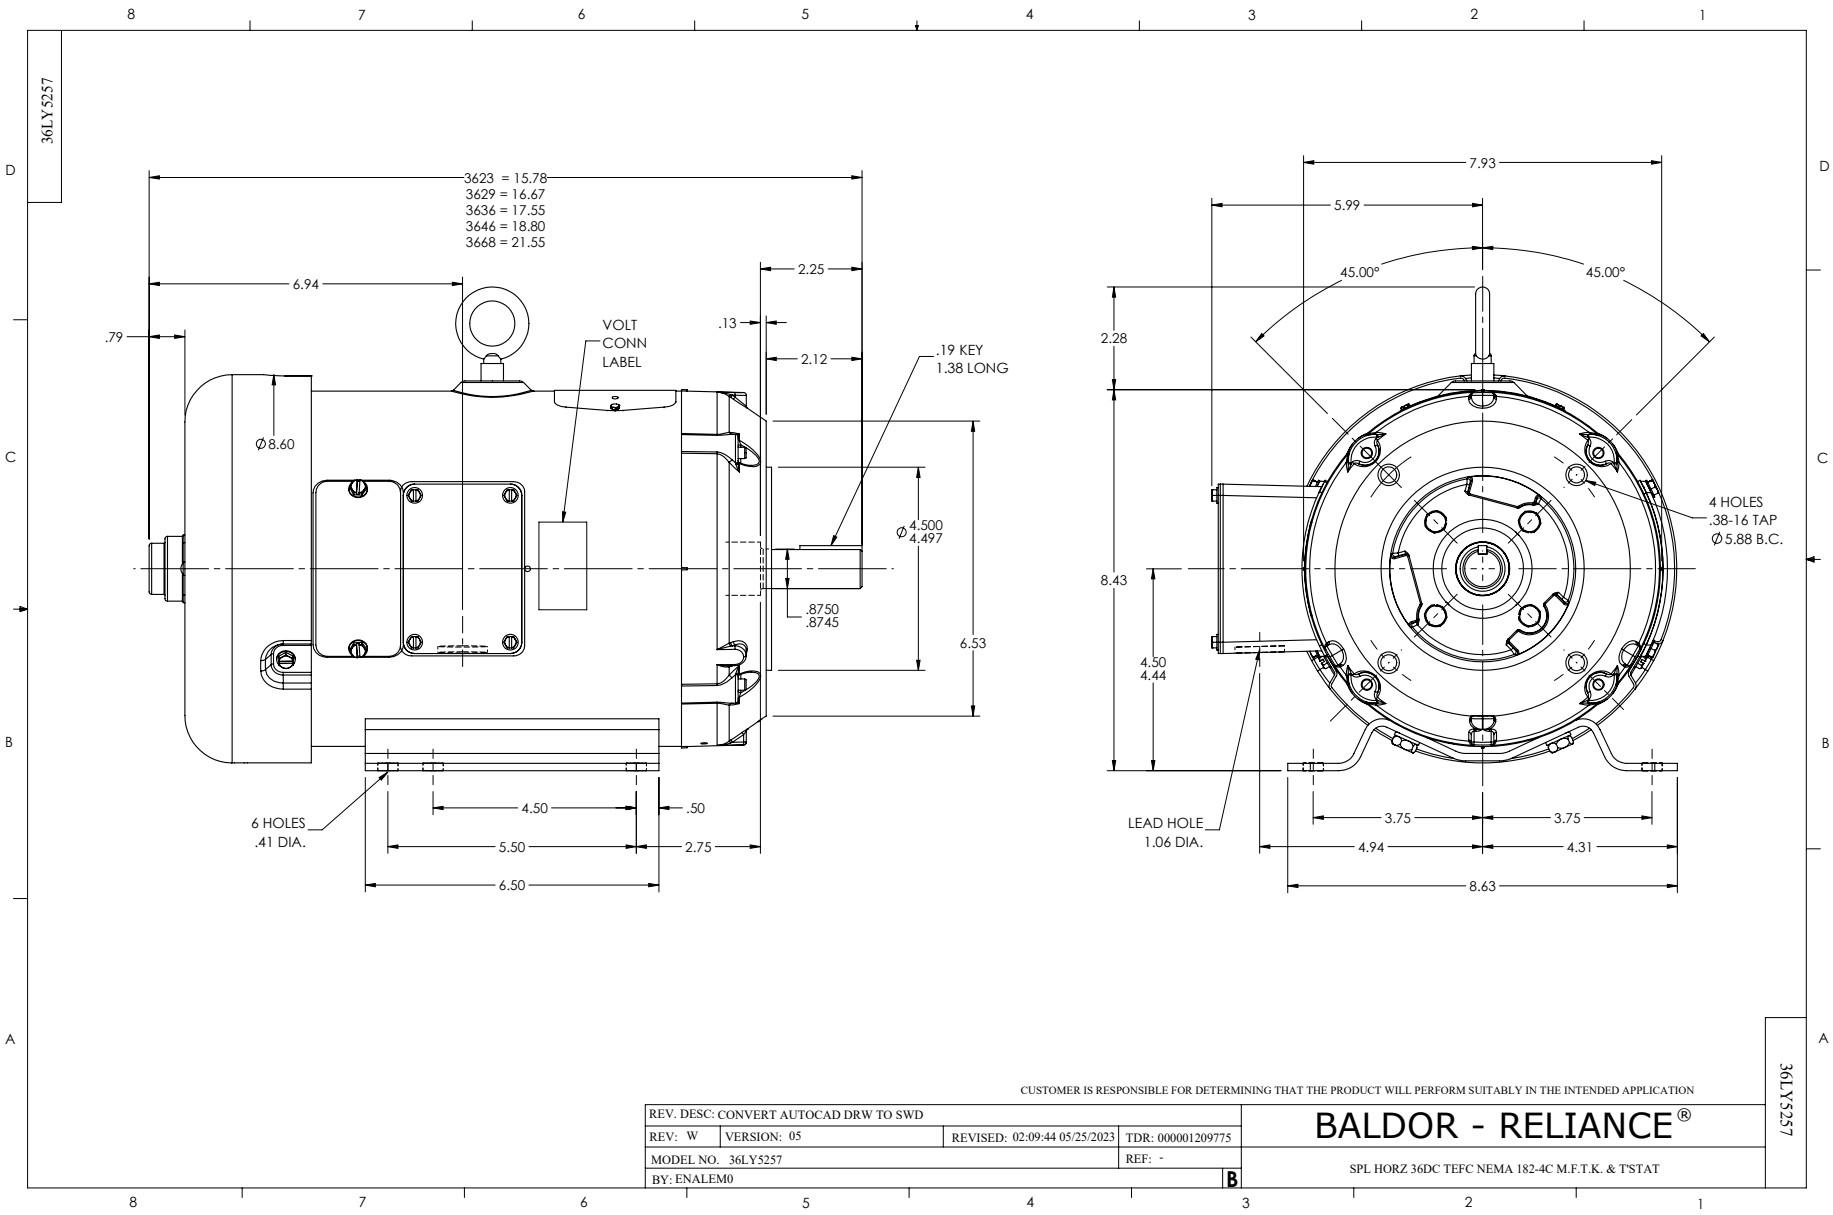
36LY5257
3623 = 15.78
3629 = 16.67
3636 = 17.55
3646 = 18.80
3668 = 21.55
6.94
.79
2.25
.13
2.12
VOLT CONN LABEL
.19 KEY 1.38 LONG
Ø8.60
Ø4.500 4.497
.8750 .8745
6.53
6 HOLES .41 DIA.
4.50
.50
5.50
2.75
6.50
7.93
5.99
45.00°
45.00°
2.28
8.43
4.50 4.44
4 HOLES .38-16 TAP Ø5.88 B.C.
LEAD HOLE 1.06 DIA.
3.75
3.75
4.94
4.31
8.63
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERT AUTOCAD DRW TO SWD
REV: W
VERSION: 05
REVISED: 02:09:44 05/25/2023
TDR: 000001209775
MODEL NO. 36LY5257
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
SPL HORZ 36DC TEFC NEMA 182-4C M.F.T.K. & T'STAT
36LY5257

CD0860C01

SHUNT WOUND

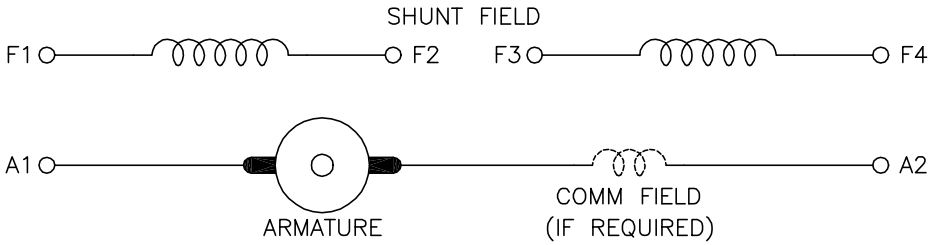

CONNECTION	DIRECTION OF ROTATION			
	CWDE		CCWDE	
	POS TERM (+)	NEG TERM (−)	POS TERM (+)	NEG TERM (−)
HIGH VOLTAGE	A1 F1 CONNECT F2 & F3	A2 F4	A2 F1 CONNECT F2 & F3	A1 F4
LOW VOLTAGE	A1 F1 & F3	A2 F2 & F4	A2 F1 & F3	A1 F2 & F4

NOTES:

1. LIMIT STARTING INRUSH CURRENT TO NOT MORE THAN 3 TIMES RATED AMPERES BY ENERGIZING THE FULL SHUNT FIELD BEFORE BRINGING THE ARMATURE VOLTAGE UP SLOWLY OR IN STEPS.
2. OPTIONAL FIELD REOSTAT MAY BE CONNECTED IN SERIES WITH THE SHUNT FIELD.
3. OPTIONAL THERMOSTAT LEADS ARE MARKED J,J.

CD0860C01

REV. DESC: NEW, REPLACE CD0860			BALDOR ELECTRIC Co.
REV. LTR: –	BY: JLP	REVISED: 15:35:22 11/03/2004	TDR: 347796
CD0860C01		FILE: AAA00121477	REF: CD0860C01
		MTL: –	DC CONNECTION DIAGRAM, SHUNT FIELD, 6 LEAD, DUAL VOLTAGE