

# ABB BALDOR RELIANCE III

---

## Customer information packet

CDRXL050744

.75HP, 1750RPM, 1PH, 60HZ, 56C, 3522L, XPFC, F1

Class - CLI GP C,D

Division - Division I

**Specifications**

<b>Enclosure</b>	XPFC
<b>Frame</b>	56C
<b>Frame Material</b>	Steel
<b>Frequency</b>	60.00 Hz
<b>Haz Area Class and Group</b>	CLI GP C,D
<b>Haz Area Division</b>	Division I
<b>Motor Letter Type</b>	Cap Start, Induction Run
<b>Output @ Frequency</b>	.750 HP @ 60 HZ
<b>Phase</b>	1
<b>Synchronous Speed @ Frequency</b>	1800 RPM @ 60 HZ
<b>Voltage @ Frequency</b>	230.0 V @ 60 HZ 208.0 V @ 60 HZ 115.0 V @ 60 HZ
<b>Agency Approvals</b>	CSA UL
<b>Ambient Temperature</b>	40 °C
<b>Auxiliary Box</b>	NO AUXILLARY BOX
<b>Auxiliary Box Lead Termination</b>	None
<b>Base Indicator</b>	Rigid
<b>Bearing Grease Type</b>	Polyrex EM (-20F +300F)
<b>Blower</b>	None
<b>Current @ Voltage</b>	5.000 A @ 230.0 V 4.850 A @ 208.0 V 10.000 A @ 115.0 V
<b>Design Code</b>	N
<b>Drip Cover</b>	No Drip Cover
<b>Duty Rating</b>	CONT
<b>Efficiency @ 100% Load</b>	70.0 %
<b>Electrically Isolated Bearing</b>	Not Electrically Isolated
<b>Feedback Device</b>	NO FEEDBACK
<b>Front Shaft Indicator</b>	None
<b>Haz Area Temp Code</b>	T3C

**Part Detail**

<b>Revision</b>	F
<b>Type</b>	AC
<b>Mech. spec.</b>	35X723
<b>Base</b>	
<b>Status</b>	PRD/A
<b>Elec. spec.</b>	35WGG393
<b>Layout</b>	35LYX723
<b>Eff. date</b>	05-29-2026
<b>CD Diagram</b>	CD0001
<b>Poles</b>	04
<b>Leads</b>	6#18
<b>Proprietary</b>	False
<b>Created date</b>	08-01-2022

<b>Heater Indicator</b>	No Heater
<b>High Voltage Full Load Amps</b>	4.9 a
<b>Insulation Class</b>	F
<b>Inverter Code</b>	Not Inverter
<b>KVA Code</b>	L
<b>Lifting Lugs</b>	No Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Motor Lead Quantity/Wire Size</b>	6 @ 18 AWG
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	X3522L
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	4
<b>Overall Length</b>	15.17 IN
<b>Power Factor</b>	69
<b>Product Family</b>	Hazardous Location Motor
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	C-Face
<b>Pulley Shaft Indicator</b>	Standard
<b>Rodent Screen</b>	None
<b>Service Factor</b>	1.15
<b>Shaft Diameter</b>	0.625 IN
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	No Slinger
<b>Speed</b>	1750 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	Normally Closed Thermostat
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

**Nameplate**

<b>NP0977XPSL</b>										
<b>NO.</b>									<b>CC</b>	
<b>SER.</b>									<b>TEMP CODE</b>	T3C
<b>SPEC.</b>	35X723G393									
<b>CAT.NO.</b>	CDRXL050744									
<b>HP</b>	.75									
<b>VOLTS</b>	115/208-230									
<b>AMPS</b>	10/4.85-5									
<b>RPM</b>	1750				<b>MOTOR WEIGHT</b>		39			
<b>HERTZ</b>	60	<b>PH</b>	1	<b>CL</b>	F	<b>DE BRG</b>	6205			
<b>SER.F.</b>	1.15	<b>DES</b>	N	<b>CODE</b>	L	<b>ODE BRG</b>	6203			
<b>FRAME</b>	56C	<b>GREASE</b>		POLYREX EM						
<b>RATING</b>	40C AMB-CONT									
					<b>NEMA-NOM-EFF</b>		70	<b>PF</b>	69	
	NEMA MG-1 PT 5,IP55									


ABB Motors and Mechanical Inc.


WINDING # 35WGG393

Typical performance - not guaranteed values.


0.75 HP 1 PH 60 HZ 1720 RPM 115 V 3522L

TORQUES (LB-FT): PO=4.86 PU=4 LR=8.91 LRA=59.09

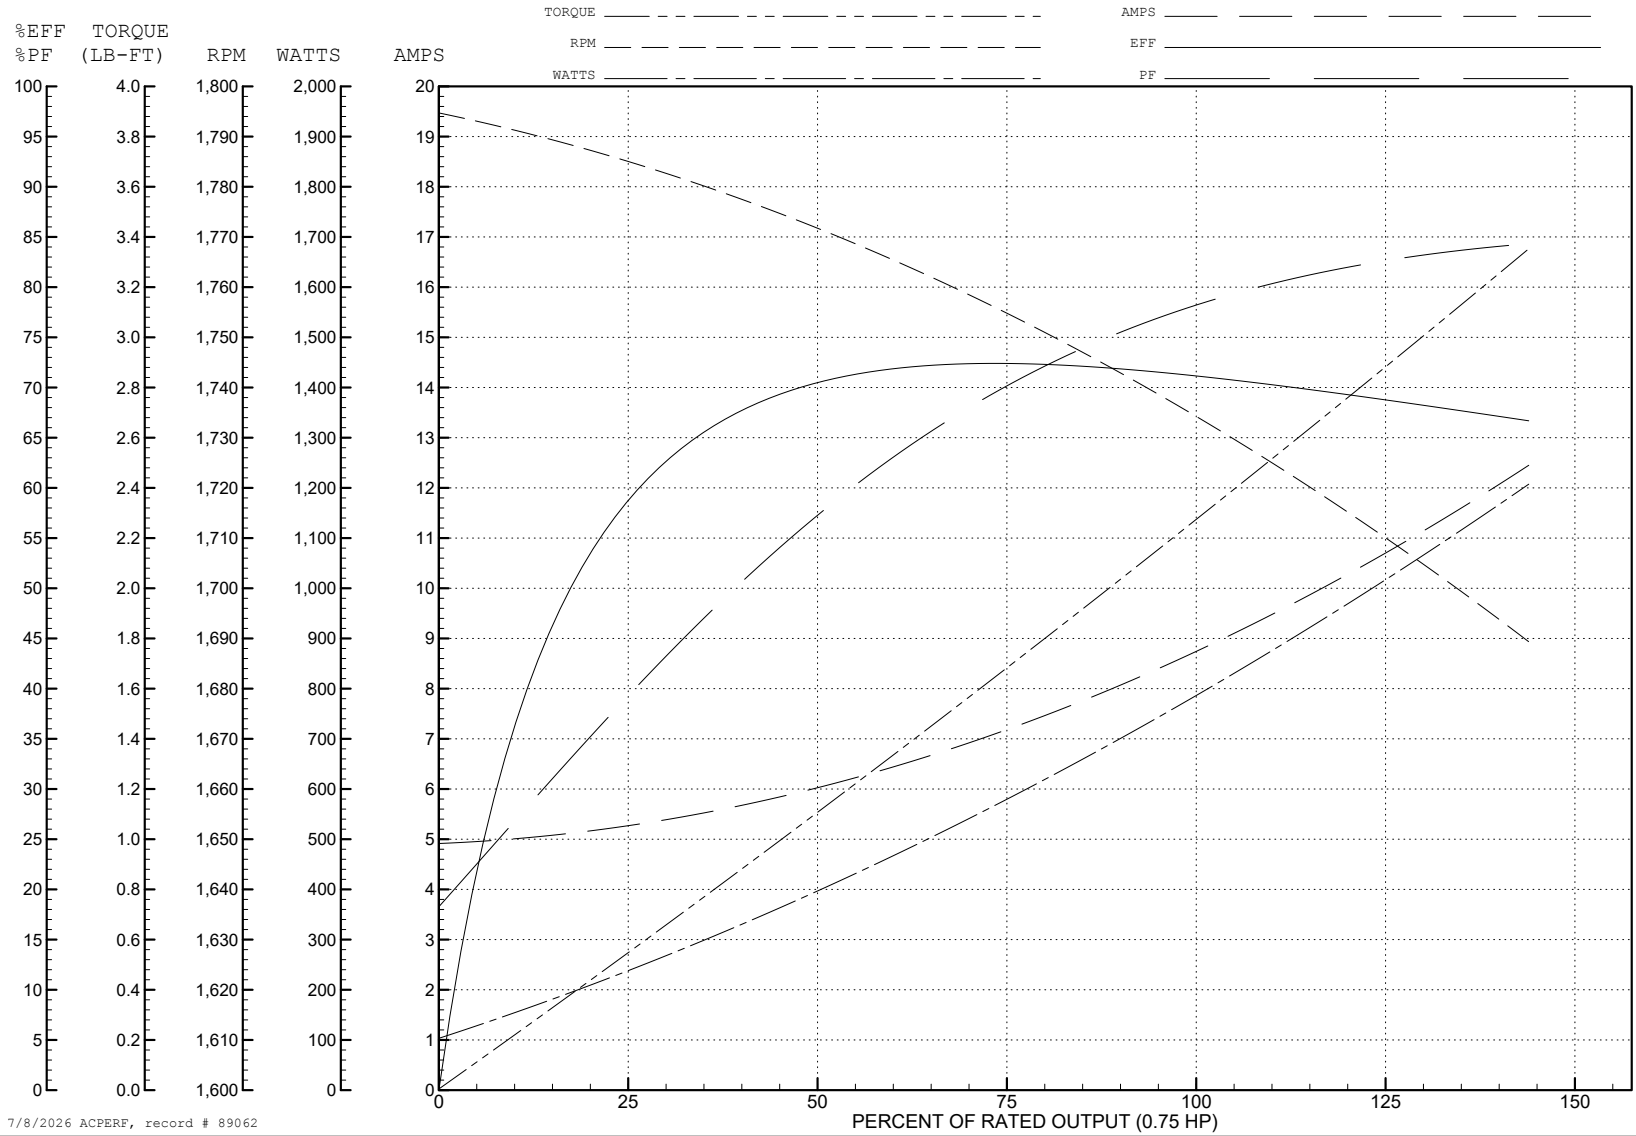

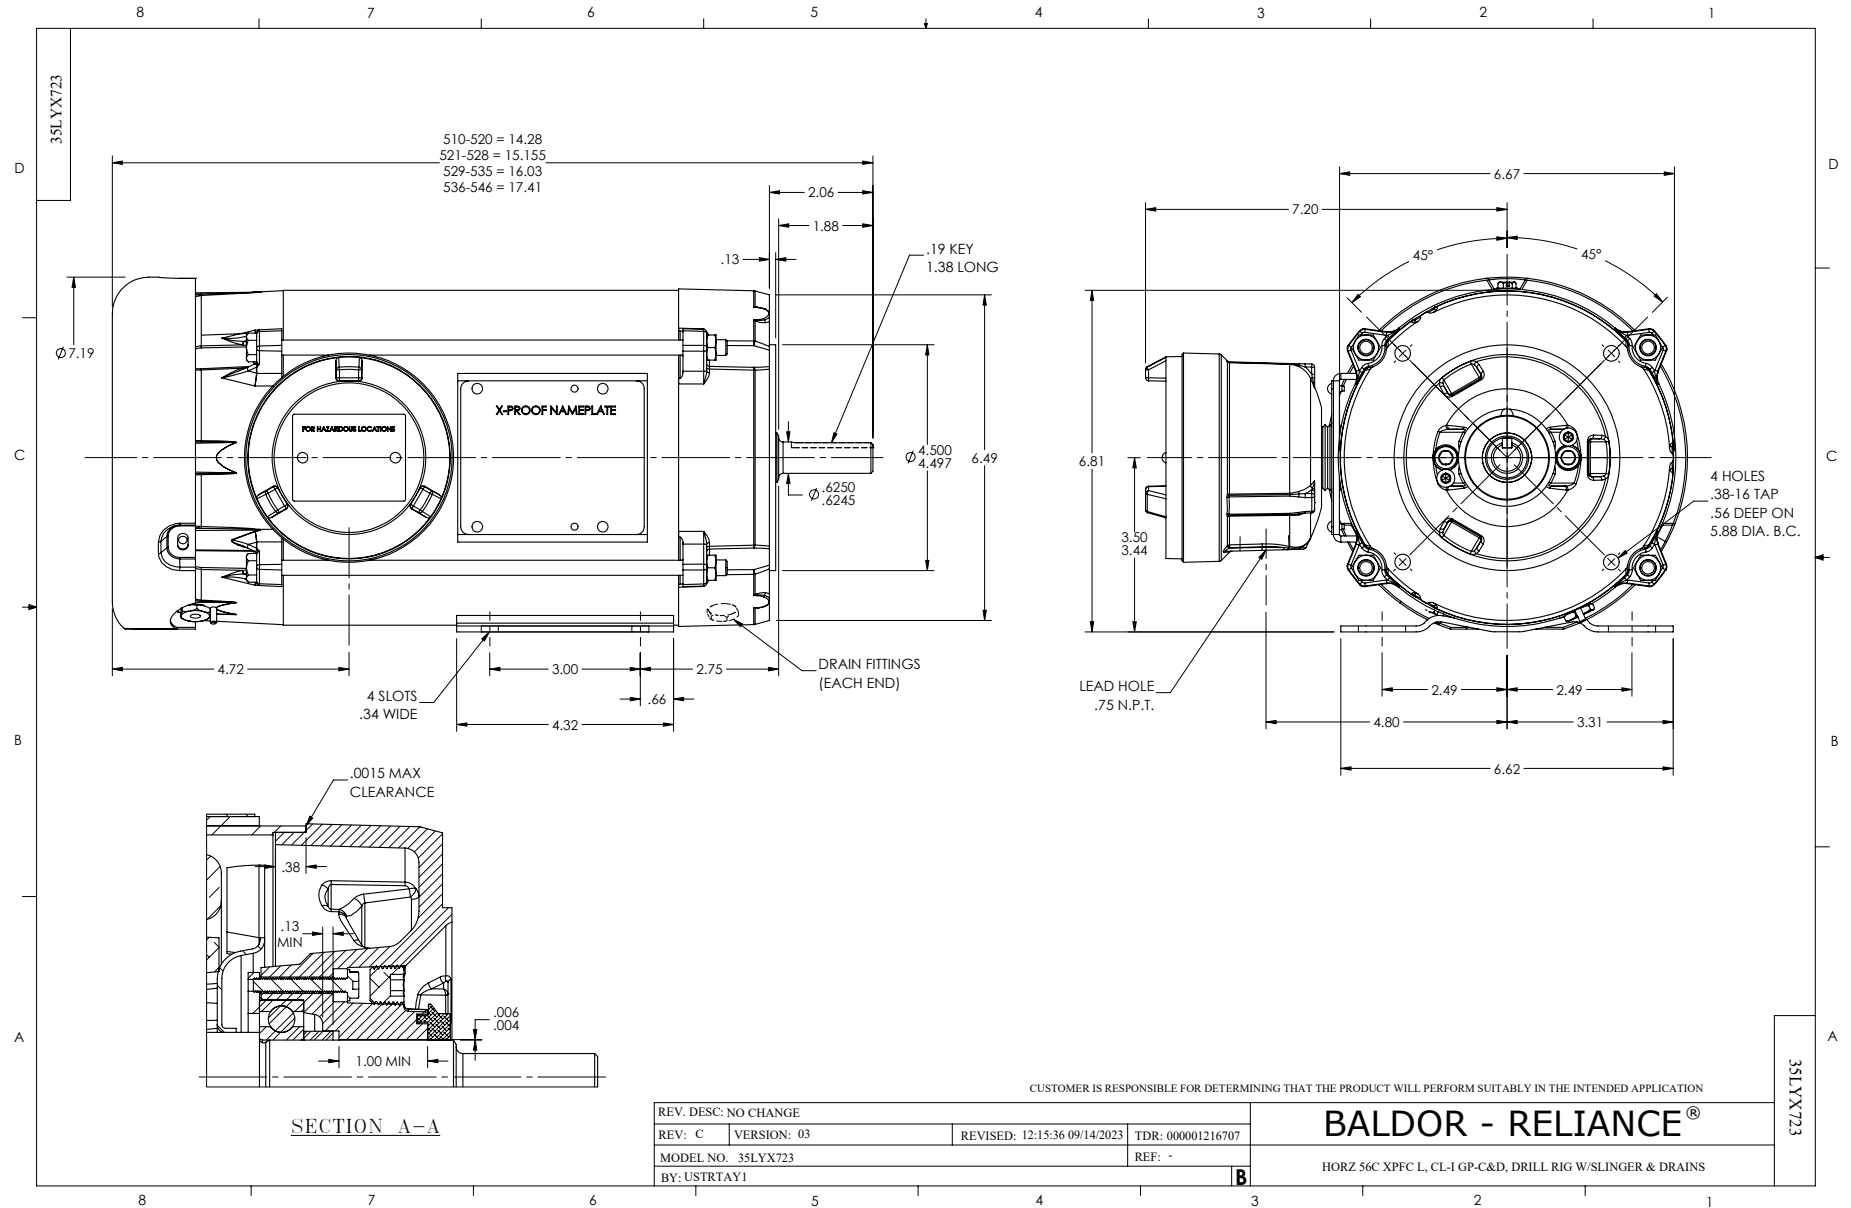

CD0001

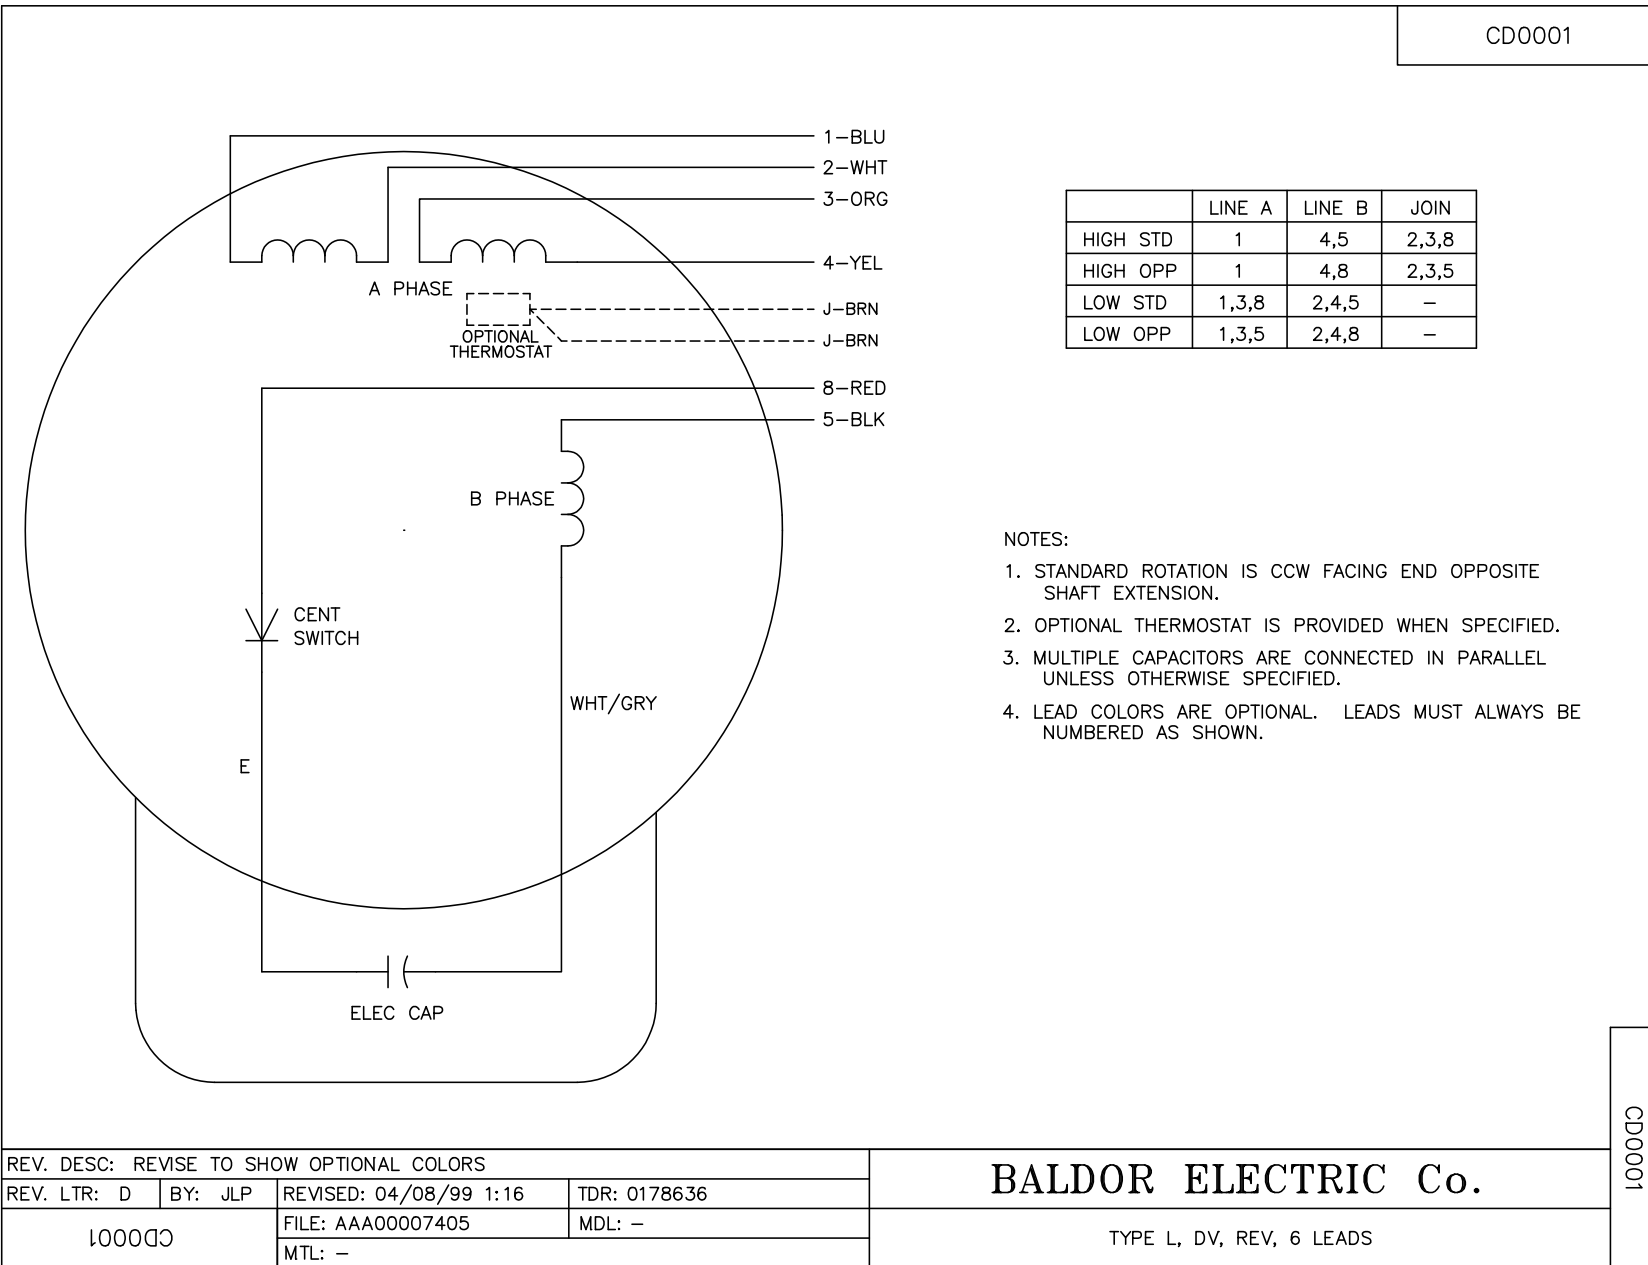

	LINE A	LINE B	JOIN
HIGH STD	1	4,5	2,3,8
HIGH OPP	1	4,8	2,3,5
LOW STD	1,3,8	2,4,5	-
LOW OPP	1,3,5	2,4,8	-

**NOTES:**

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0001

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:16	TDR: 0178636
100000		FILE: AAA00007405	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

TYPE L, DV, REV, 6 LEADS