



---

# Customer information packet

## CECP83582T-4

1HP, 1155RPM, 3PH, 60HZ, 145TC, 0526M, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

## Specifications

Enclosure	TEFC
Frame	145TC
Frame Material	Iron
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
XP Class and Group	CLI GP A,B,C,D
XP Division	Division II
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	2.0
Current @ Voltage	1.700 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None

## Part detail

Revision	C
Type	AC
Mech. spec.	05EE943
Base	
Status	PRD/A
Elec. spec.	05WGX572
Layout	05LYEE943
Eff. date	11-08-2023
CD Diagram	CD0006
Poles	06
Leads	3#18
Proprietary	False
Created date	09-09-2022

Heater Indicator	No Heater
High Voltage Full Load Amps	1.7 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0526M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	13.38 IN
Power Factor	67
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1155 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

**XP Temp Code**

**T4**

---

**Nameplate**

<b>NP4328</b>									
<b>CAT.NO.</b>	CECP83582T-4								
<b>SPEC.</b>	05EE943X572G1								
<b>HP</b>	1 TE				<b>IP</b>	56			
<b>VOLTS</b>	460								
<b>AMPS</b>	1.7								
<b>R.P.M.</b>	1155								
<b>FRAME</b>	145TC		<b>HZ</b>	60		<b>PH</b>	3		
<b>SER.F.</b>	1.15	<b>CODE</b>	J	<b>DES.</b>	B	<b>CLASS</b>	F		
<b>RATING</b>	40C AMB-CONT								
<b>SN</b>									
<b>DE</b>	6205		<b>ODE</b>	6205					
<b>NEMA NOM. EFF.</b>	82.5		<b>P.F.</b>	67					
<b>GUAR. MIN. EFF.</b>	80	<b>CC</b>	010A						
<b>T. CODE</b>	T4		<b>TEMP=</b>	135					

**NP3186**

<b>SPEC.</b>	05EE943X572G1		
<b>ABMA DE BRG</b>	25BC02X30X		
<b>ABMA ODE BRG</b>	25BC02X30X		
<b>GREASE</b>	POLYREX EM		
<b>MOTOR WEIGHT</b>	61	<b>ROTOR BARS</b>	27
		<b>STATOR BARS</b>	36
<b>MAX. R.P.M.</b>	1800	<b>MAX. KVAR</b>	
	SFA 1.86		
<b>INV.TYPE</b>	PWM		
<b>T=</b>	135		
<b>CHP</b>	60	<b>TO</b>	90
<b>CT</b>	2.0	<b>TO</b>	60
<b>VT</b>	-0	<b>TO</b>	60
<b>HTR-VOLTS</b>	N/A	<b>HTR-AMPS</b>	N/A
<b>HTR-WATTS</b>		<b>MAX. SPACE HEATER TEMP.</b>	N/A

**AC Induction Motor Performance Data**

Record # 82314

Typical performance - not guaranteed values

<b>Winding: 05WGX572-R001</b>		<b>Type: 0526M</b>		<b>Enclosure: TEFC</b>	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: Single Voltage Motor</b>		
<b>Rated Output (HP)</b>	1	<b>Full Load Torque</b>	4.48 LB-FT		
<b>Volts</b>	460	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	1.7	<b>Breakdown Torque</b>	11.9 LB-FT		
<b>R.P.M.</b>	1155	<b>Pull-up Torque</b>	7.06 LB-FT		
<b>Hz</b>	60	<b>Locked-rotor Torque</b>	8.62 LB-FT		
<b>NEMA Design Code</b>	B	<b>Starting Current</b>	9.06 A		
<b>Service Factor (S.F.)</b>	1.15	<b>No-load Current</b>	1.02 A		
<b>NEMA Nom. Eff.</b>	82.5	<b>Line-line Res. @ 25°C</b>	21.1 Ω		
<b>Rating - Duty</b>	40C	<b>Temp. Rise @ Rated Load</b>	46°C		
<b>S.F. Amps</b>	AMB-CONT	<b>Temp. Rise @ S.F. Load</b>	56°C		
		<b>Locked-rotor Power Factor</b>	48.3		
		<b>Rotor inertia</b>	0.189 lb-ft <sup>2</sup>		

**Load Characteristics 460 V, 60 Hz, 1 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	29	47	59	67	72	75	70
<b>Efficiency</b>	73.6	81.7	83.5	83.2	81.6	79.1	82.2
<b>Speed</b>	1193	1185	1178	1169	1159	1147	1163
<b>Line amperes</b>	1.07	1.21	1.41	1.67	1.98	2.35	1.86


ABB Motors and Mechanical Inc.

WINDING # 05WGX572

Typical performance - not guaranteed values.

1 HP 3 PH 60 HZ 1155 RPM 460 V 0526M

TORQUES (LB-FT): PO=11.9 PU=7.06 LR=8.62 LRA=9.06

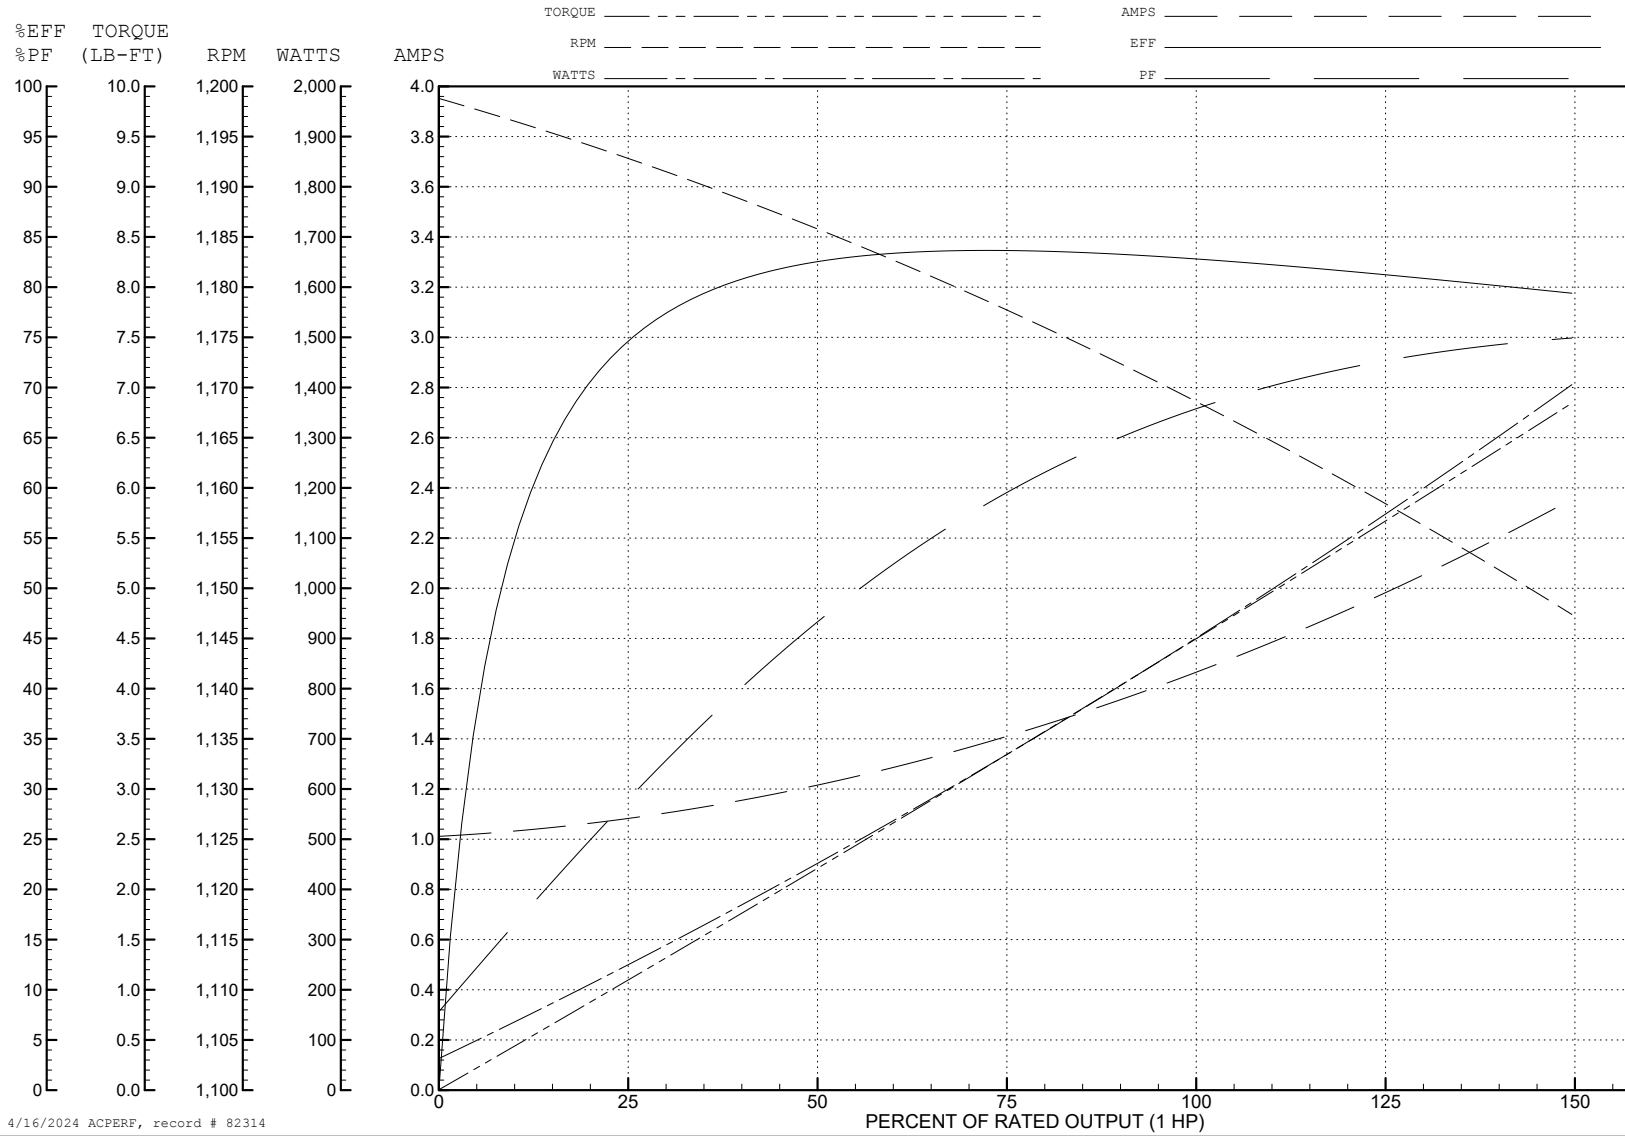

4/16/2024 ACPERF, record # 82314



**AC Induction Motor Performance Data**

Record # 99230

Typical performance - not guaranteed values

Winding: 05WGX572-R001		Type: 0526M		Enclosure: TEFC	
<b>Nameplate Data</b>			<b>368 V, 60 Hz: Single Voltage Motor</b>		
Rated Output (HP)	1	Full Load Torque	4.56 LB-FT		
Volts	368	Start Configuration	direct on line		
Full Load Amps	1.7	Breakdown Torque	7.6 LB-FT		
R.P.M.	1155	Pull-up Torque	4.4 LB-FT		
Hz	60 Phase	3	Locked-rotor Torque	5.4 LB-FT	
NEMA Design Code	B	KVA Code	J	Starting Current	7.2 A
Service Factor (S.F.)	1.15		No-load Current	0.79 A	
NEMA Nom. Eff.	82.5	Power Factor	67	Line-line Res. @ 25°C	21.1 Ω
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	57°C	
S.F. Amps	1.86		Temp. Rise @ S.F. Load	78°C	
			Locked-rotor Power Factor	48.3	
			Rotor inertia	0.189 lb-ft <sup>2</sup>	

**Load Characteristics 368 V, 60 Hz, 1 HP**

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	41	61	71	75	76	69	76
Efficiency	79.8	84	83.2	80.5	75.7	59.7	77.6
Speed	1189	1177	1165	1149	1125	1033	1135
Line amperes	0.88	1.13	1.48	1.93	2.52	4.09	2.28


ABB Motors and Mechanical Inc.

WINDING # 05WGX572


Typical performance - not guaranteed values.

1 HP 3 PH 60 HZ 1155 RPM 368 V 0526M




TORQUES (LB-FT): PO=7.6 PU=4.4 LR=5.4 LRA=7.2

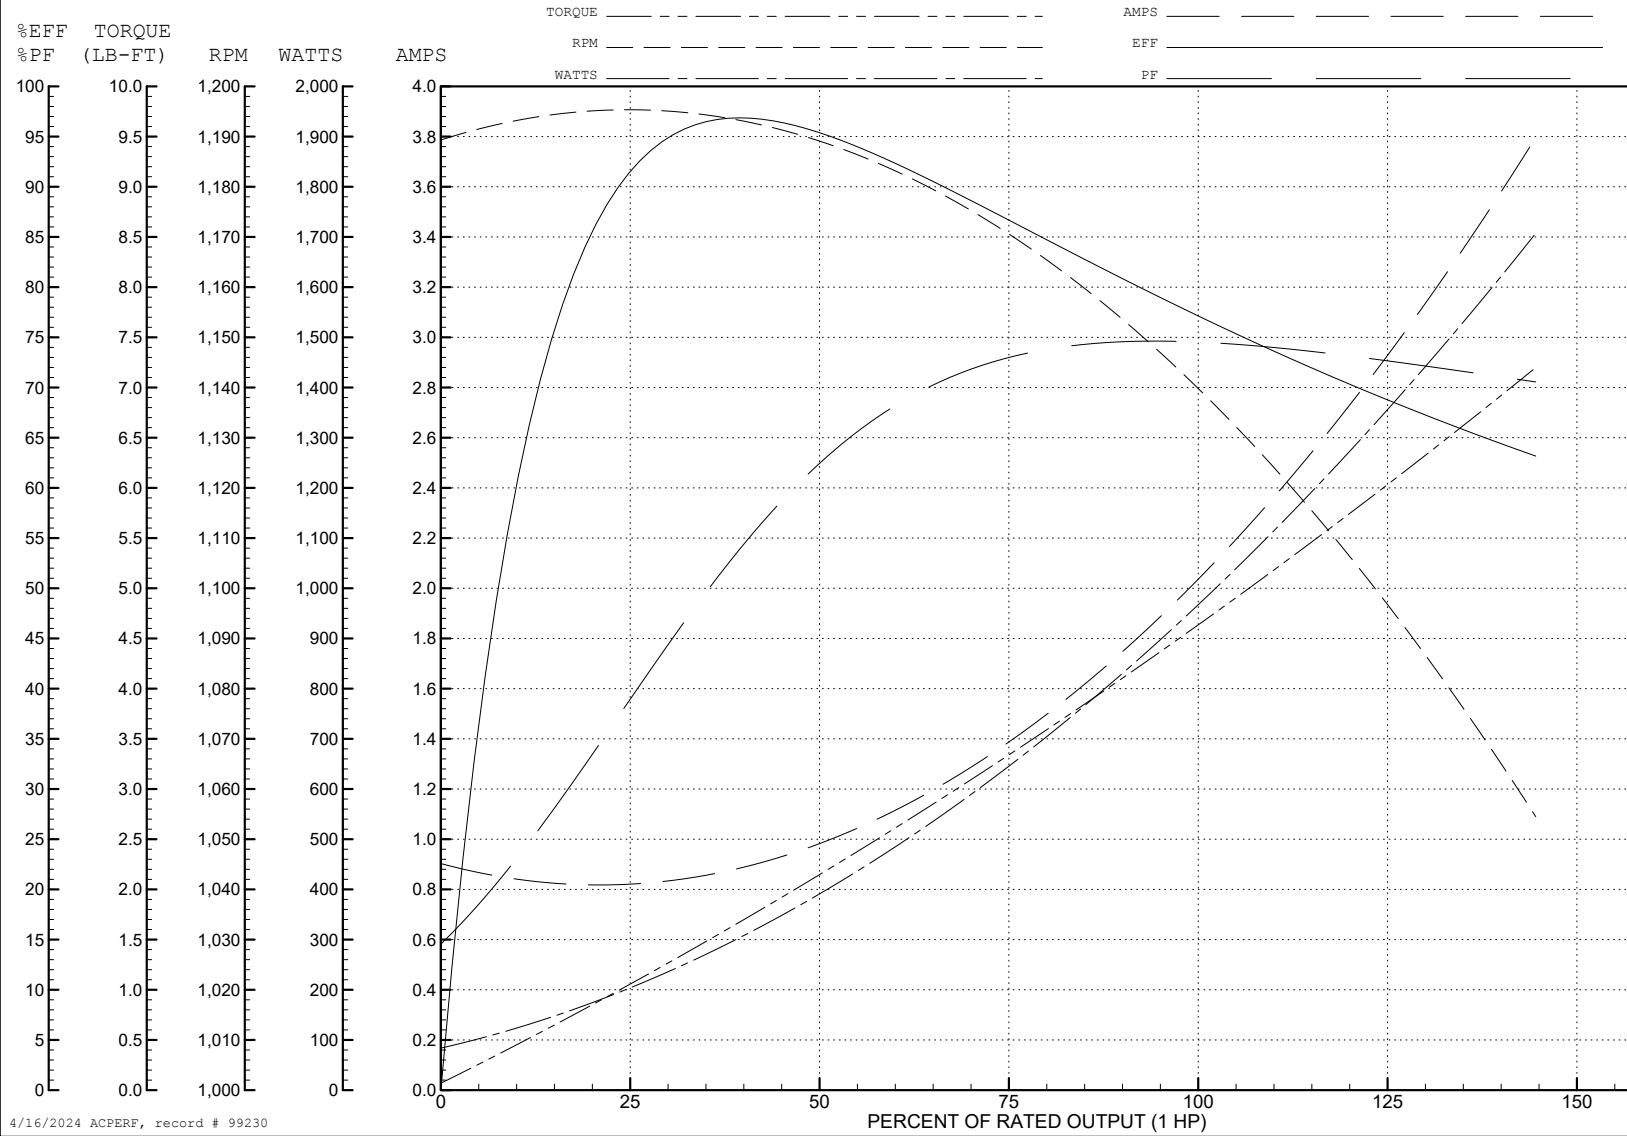

4/16/2024 ACPERF, record # 99230

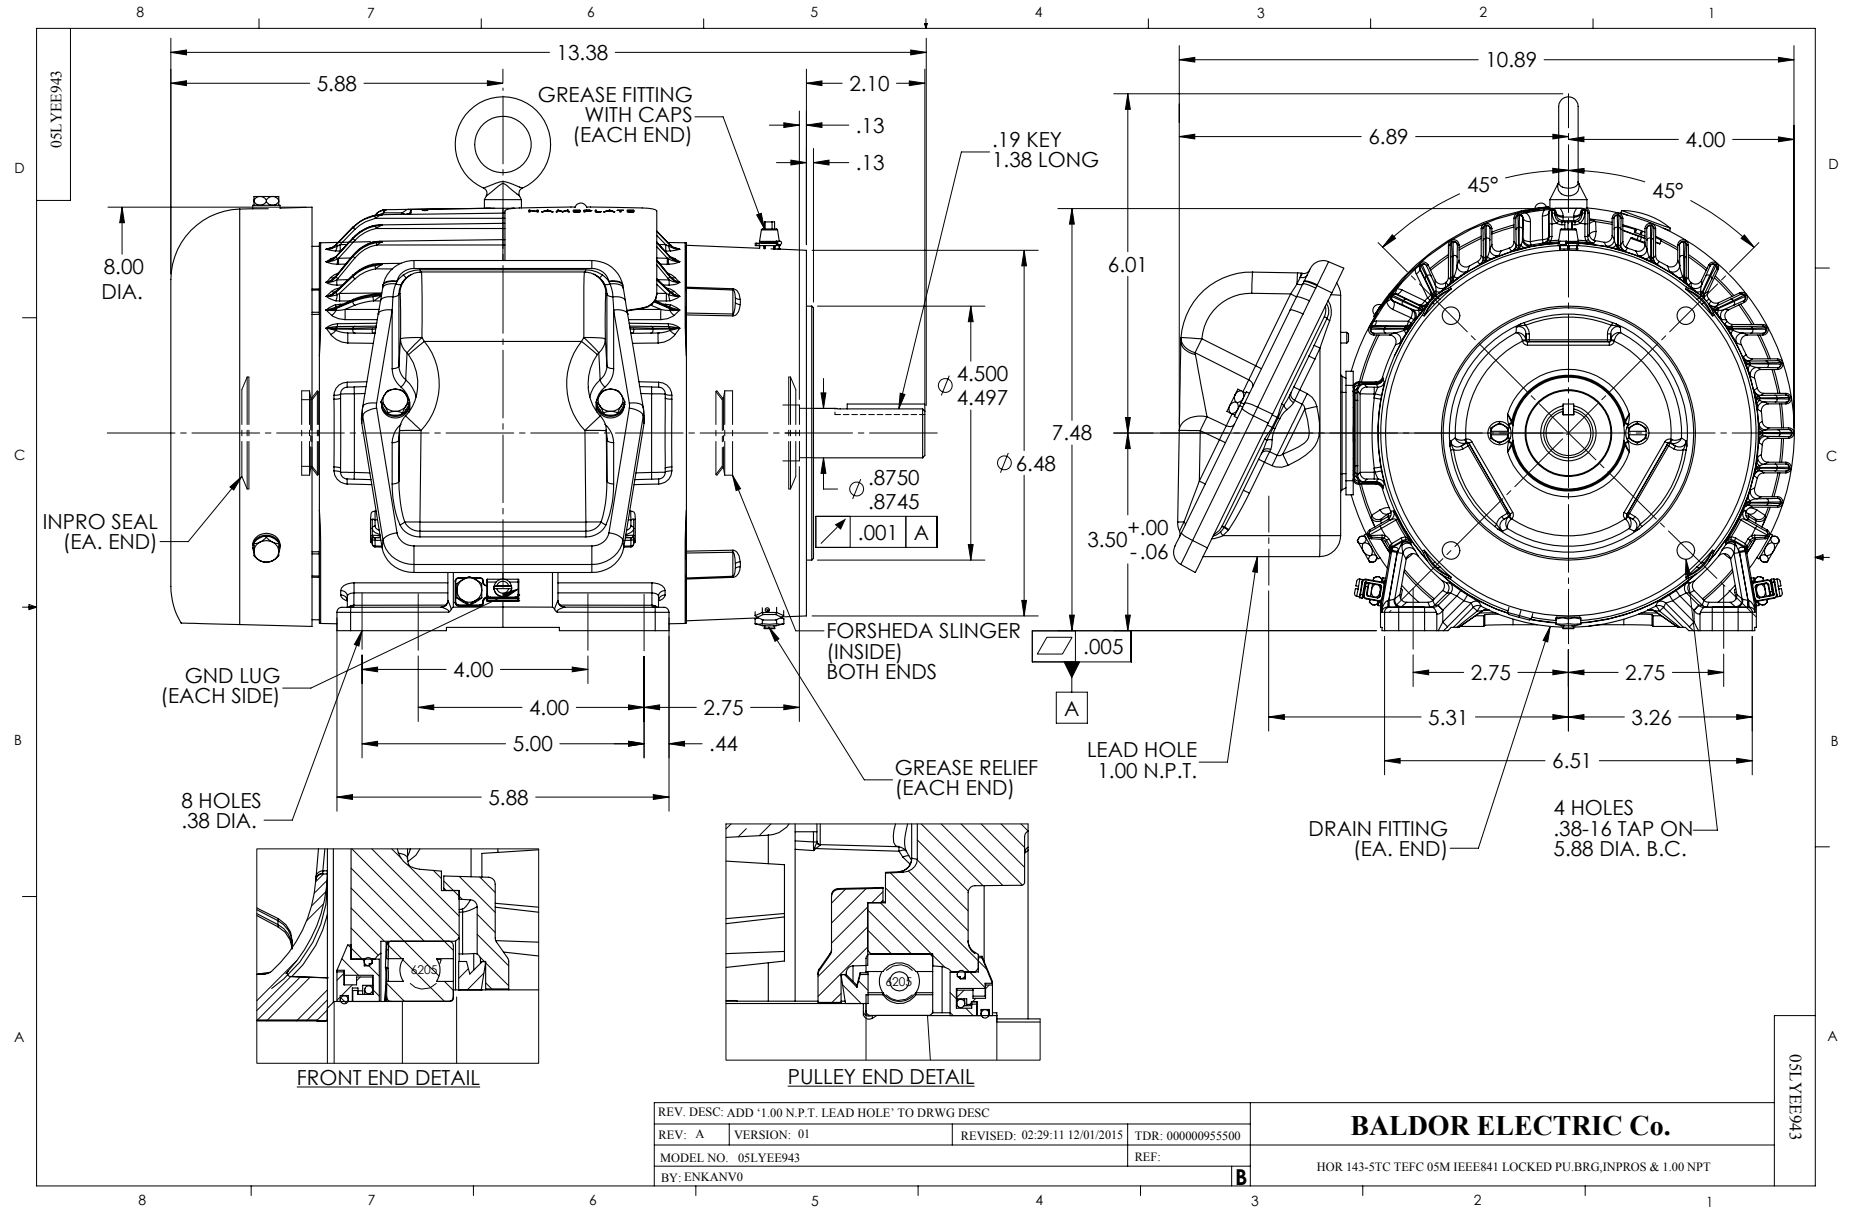

CD0006

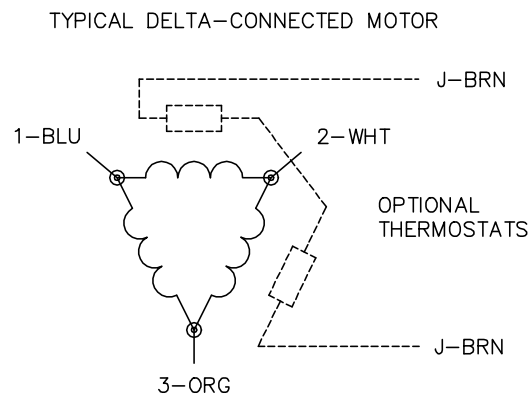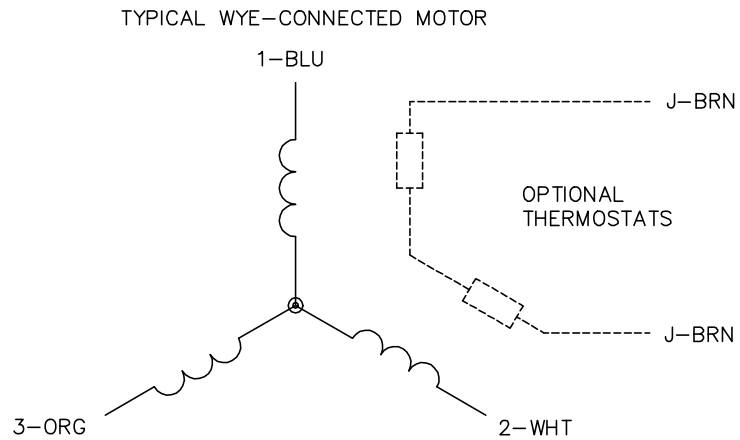

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIRO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1