

ABB BALDOR RELIANCE III

Customer information packet

CEM3120T

1.5HP, 3490RPM, 3PH, 60HZ, 143TC, 3518M, OPSB

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	143TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	NEMA PREMIUM NEMA PREMIUM (OLD LOGO) CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.000 A @ 460.0 V 4.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	84.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	2.0 a
Insulation Class	F

Part Detail

Revision	E
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	35WGM761
Layout	35LYBB102
Eff. date	01-02-2026
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	03-09-2020

Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3518M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	17.07 IN
Power Factor	83
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3490 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1259L											
CAT.NO.	CEM3120T										
SPEC.	35-0000-0671										
HP	1.5										
VOLTS	230/460										
AMP	4/2										
RPM	3490										
FRAME	143TC		HZ	60				PH	3		
SER.F.	1.15	CODE	L	DES	B	CL	F				
NEMA-NOM-EFF	84	PF	83								
RATING	40C AMB-CONT										
CC	010A										
DE	6205		ODE	6203							
ENCL	OPSB	SN									

AC Induction Motor Performance Data

Record # 53126

Typical performance - not guaranteed values

Winding: 35WGM761-R007			Type: 3518M		Enclosure: OPSB	
Nameplate Data			460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		1.5	Full Load Torque		2.26 LB-FT	
Volts		230/460	Start Configuration		direct on line	
Full Load Amps		4/2	Breakdown Torque		9.32 LB-FT	
R.P.M.		3490	Pull-up Torque		4.18 LB-FT	
Hz	60 Phase	3	Locked-rotor Torque		6.79 LB-FT	
NEMA Design Code		B	KVA Code		L	
Starting Current		17.2 A	No-load Current		1.05 A	
Service Factor (S.F.)		1.15	Line-line Res. @ 25°C		12.7 Ω	
NEMA Nom. Eff.		84	Power Factor		83	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		24°C	
S.F. Amps			Temp. Rise @ S.F. Load		28°C	
			Locked-rotor Power Factor		64	
			Rotor inertia		0.0493 lb-ft²	

Load Characteristics 460 V, 60 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	43	64	77	83	87	89	85
Efficiency	73.9	82.4	85.1	85.1	84.3	83.1	84.6
Speed	3574	3550	3524	3496	3465	3430	3477
Line amperes	1.14	1.35	1.63	1.99	2.41	2.84	2.24


ABB Motors and Mechanical Inc.

WINDING # 35WGM761

Typical performance - not guaranteed values.

1.5 HP 3 PH 60 HZ 3490 RPM 460 V 3518M

TORQUES (LB-FT): PO=9.32 PU=4.18 LR=6.79 LRA=17.2

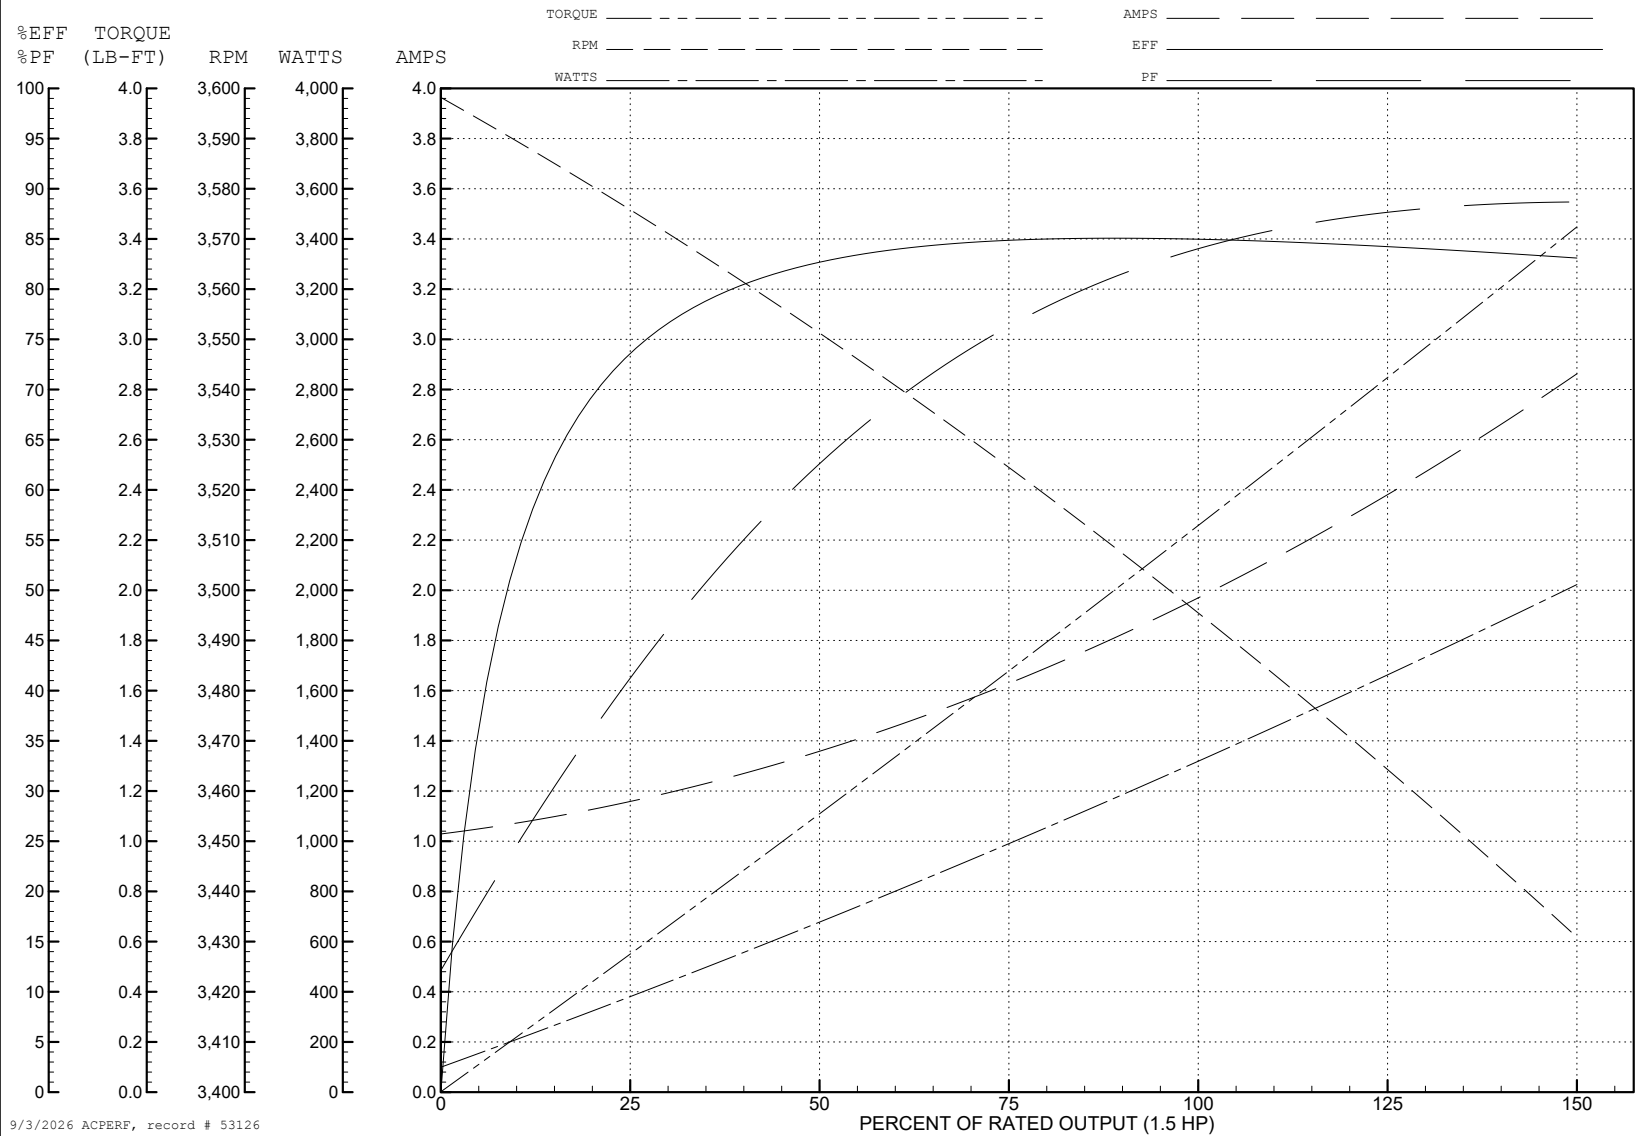



CD0005



- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005