

ABB BALDOR RELIANCE III

Customer information packet

CEM7053T-I

15//10HP, 3530//2940RPM, 3PH, 60//50HZ, 254T

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	XPFC
Frame	254TC
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ 10.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	190.0 V @ 50 HZ 230.0 V @ 60 HZ 380.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	UL CSA CSA EEV UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	14.500 A @ 380.0 V 17.200 A @ 460.0 V 29.000 A @ 190.0 V 34.400 A @ 230.0 V 37.000 A @ 208.0 V
Design Code	A

Part Detail

Revision	W
Type	AC
Mech. spec.	09F368
Base	
Status	PRD/A
Elec. spec.	09WGZ864
Layout	09LYF368
Eff. date	02-21-2024
CD Diagram	CD0180
Poles	02
Leads	9#12
Proprietary	False
Created date	11-21-2013

Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	14.5 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X0934M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	26.00 IN
Power Factor	88
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding

Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	2940 rpm
	3530 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP0977XPSLEV												
NO.								CC	010A			
SER.								TEMP CODE		T3C		
SPEC.	09F368Z864G1											
CAT.NO.	CEM7053T-I											
HP	15//10 NEMA MG-1 PT.5,IP55											
VOLTS	230/460//190/380											
AMPS	34.4/17.2//29/14.5											
RPM	3530//2940					MOTOR WEIGHT			349			
HERTZ	60//50	PH	3	CL	F	DE BRG		6309				
SER.F.	1.15	DES	A	CODE		H	ODE BRG		6208			
FRAME	254TC		GREASE		POLYREX EM							
RATING	40C AMB-CONT											
					NEMA-NOM-EFF				91		PF	88
	55C AMB @ 1.0 SF,60C RISE											

AC Induction Motor Performance Data

Record # 38686

Typical performance - not guaranteed values

Winding: 09WGZ864-R001			Type: 0934M		Enclosure: XPFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		15//10		Full Load Torque		22.2 LB-FT	
Volts		230/460//190/380		Start Configuration		direct on line	
Full Load Amps		34.4/17.2//29/14.5		Breakdown Torque		102 LB-FT	
R.P.M.		3530//2940		Pull-up Torque		32.9 LB-FT	
Hz	60//50	Phase	3	Locked-rotor Torque		40.8 LB-FT	
NEMA Design Code		A	KVA Code	H	Starting Current		128 A
Service Factor (S.F.)		1.15		No-load Current		5.9 A	
NEMA Nom. Eff.		91	Power Factor	88	Line-line Res. @ 25°C		0.591 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		56°C	
S.F. Amps				Temp. Rise @ S.F. Load		70°C	
				Locked-rotor Power Factor		29.4	
				Rotor inertia		0.868 LB-FT2	

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	57	78	86	89	90	90	90
Efficiency	86.2	90.8	91.7	91.6	91.3	90.5	91.5
Speed	3583	3567	3550	3533	3514	3493	3522
Line amperes	7.2	10	13.4	17.2	21.2	25.6	19.6


ABB Motors and Mechanical Inc.

WINDING # 09WGZ864

Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 3533 RPM 460 V 0934M

TORQUES (LB-FT): PO=102 PU=32.9 LR=40.8 LRA=128

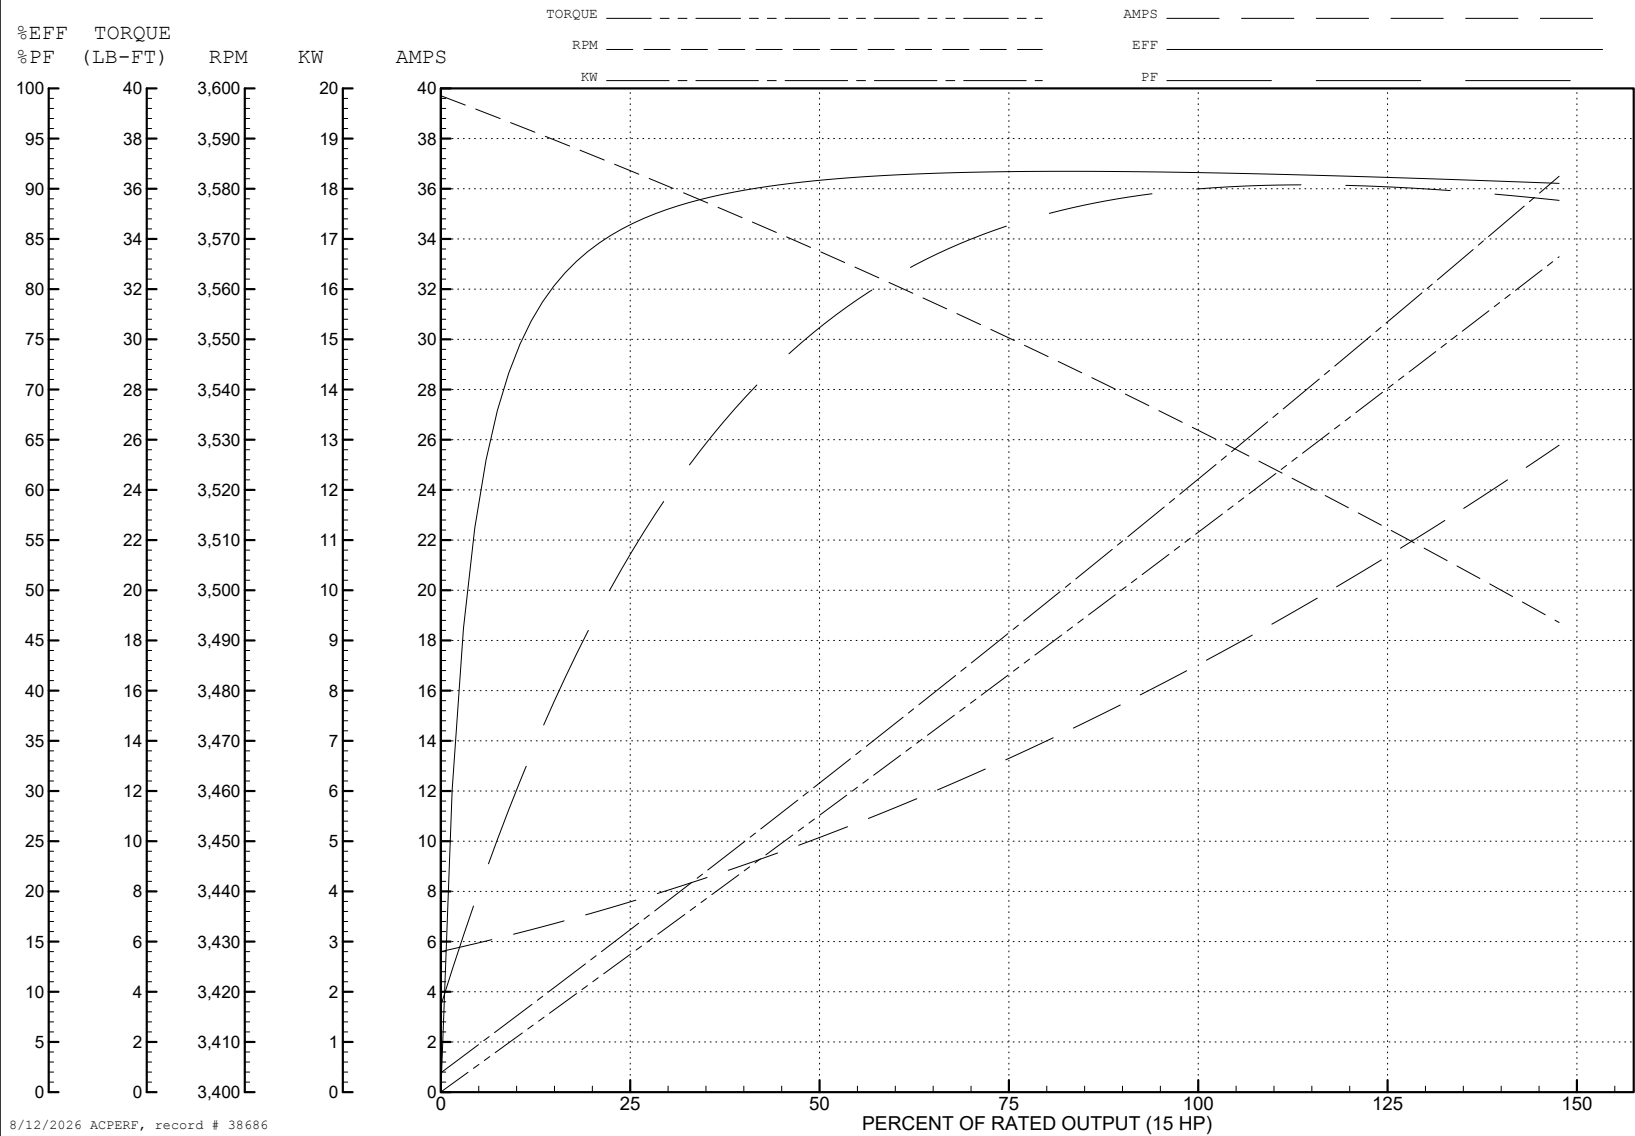

AC Induction Motor Performance Data

Record # 38687

Typical performance - not guaranteed values

Winding: 09WGZ864-R001			Type: 0934M		Enclosure: XPFC		
Nameplate Data				380 V, 50 Hz: High Voltage Connection			
Rated Output (HP)		15//10		Full Load Torque		17.7 LB-FT	
Volts		230/460//190/380		Start Configuration		direct on line	
Full Load Amps		34.4/17.2//29/14.5		Breakdown Torque		97.6 LB-FT	
R.P.M.		3530//2940		Pull-up Torque		34.9 LB-FT	
Hz	60//50	Phase	3	Locked-rotor Torque		43.2 LB-FT	
NEMA Design Code		A	KVA Code	H	Starting Current		125 A
Service Factor (S.F.)		1.15		No-load Current		5.79 A	
NEMA Nom. Eff.		91	Power Factor	88	Line-line Res. @ 25°C		0.591 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		42°C	
S.F. Amps				Temp. Rise @ S.F. Load		51°C	
				Locked-rotor Power Factor		33.3	
				Rotor inertia		0.868 LB-FT2	

Load Characteristics 380 V, 50 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	51	73	82	87	89	89	88
Efficiency	84.8	90.1	91.3	91.2	91	90.6	91.1
Speed	2986	2973	2959	2946	2931	2914	2937
Line amperes	6.62	8.7	11.3	14.2	17.3	20.7	16.1


ABB Motors and Mechanical Inc.


WINDING # 09WGZ864

Typical performance - not guaranteed values.




10 HP 3 PH 50 HZ 2946 RPM 380 V 0934M

TORQUES (LB-FT) : PO=97.6 PU=34.9 LR=43.2 LRA=125

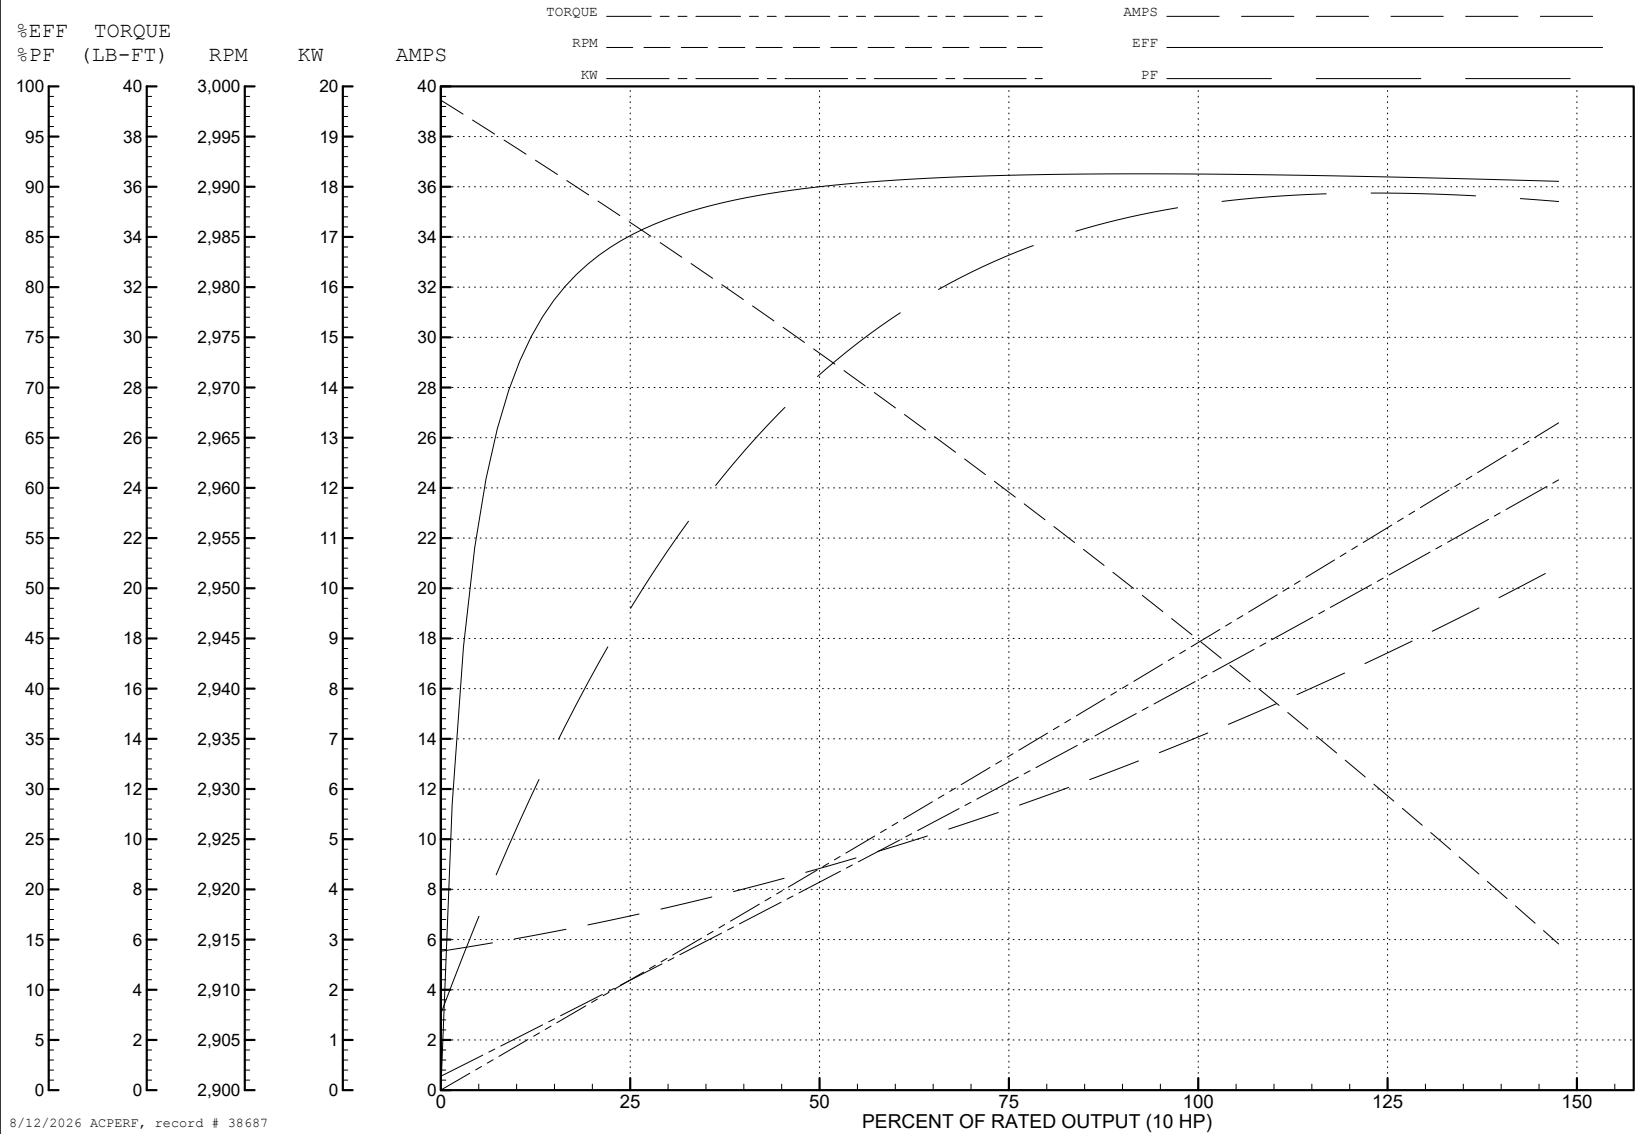

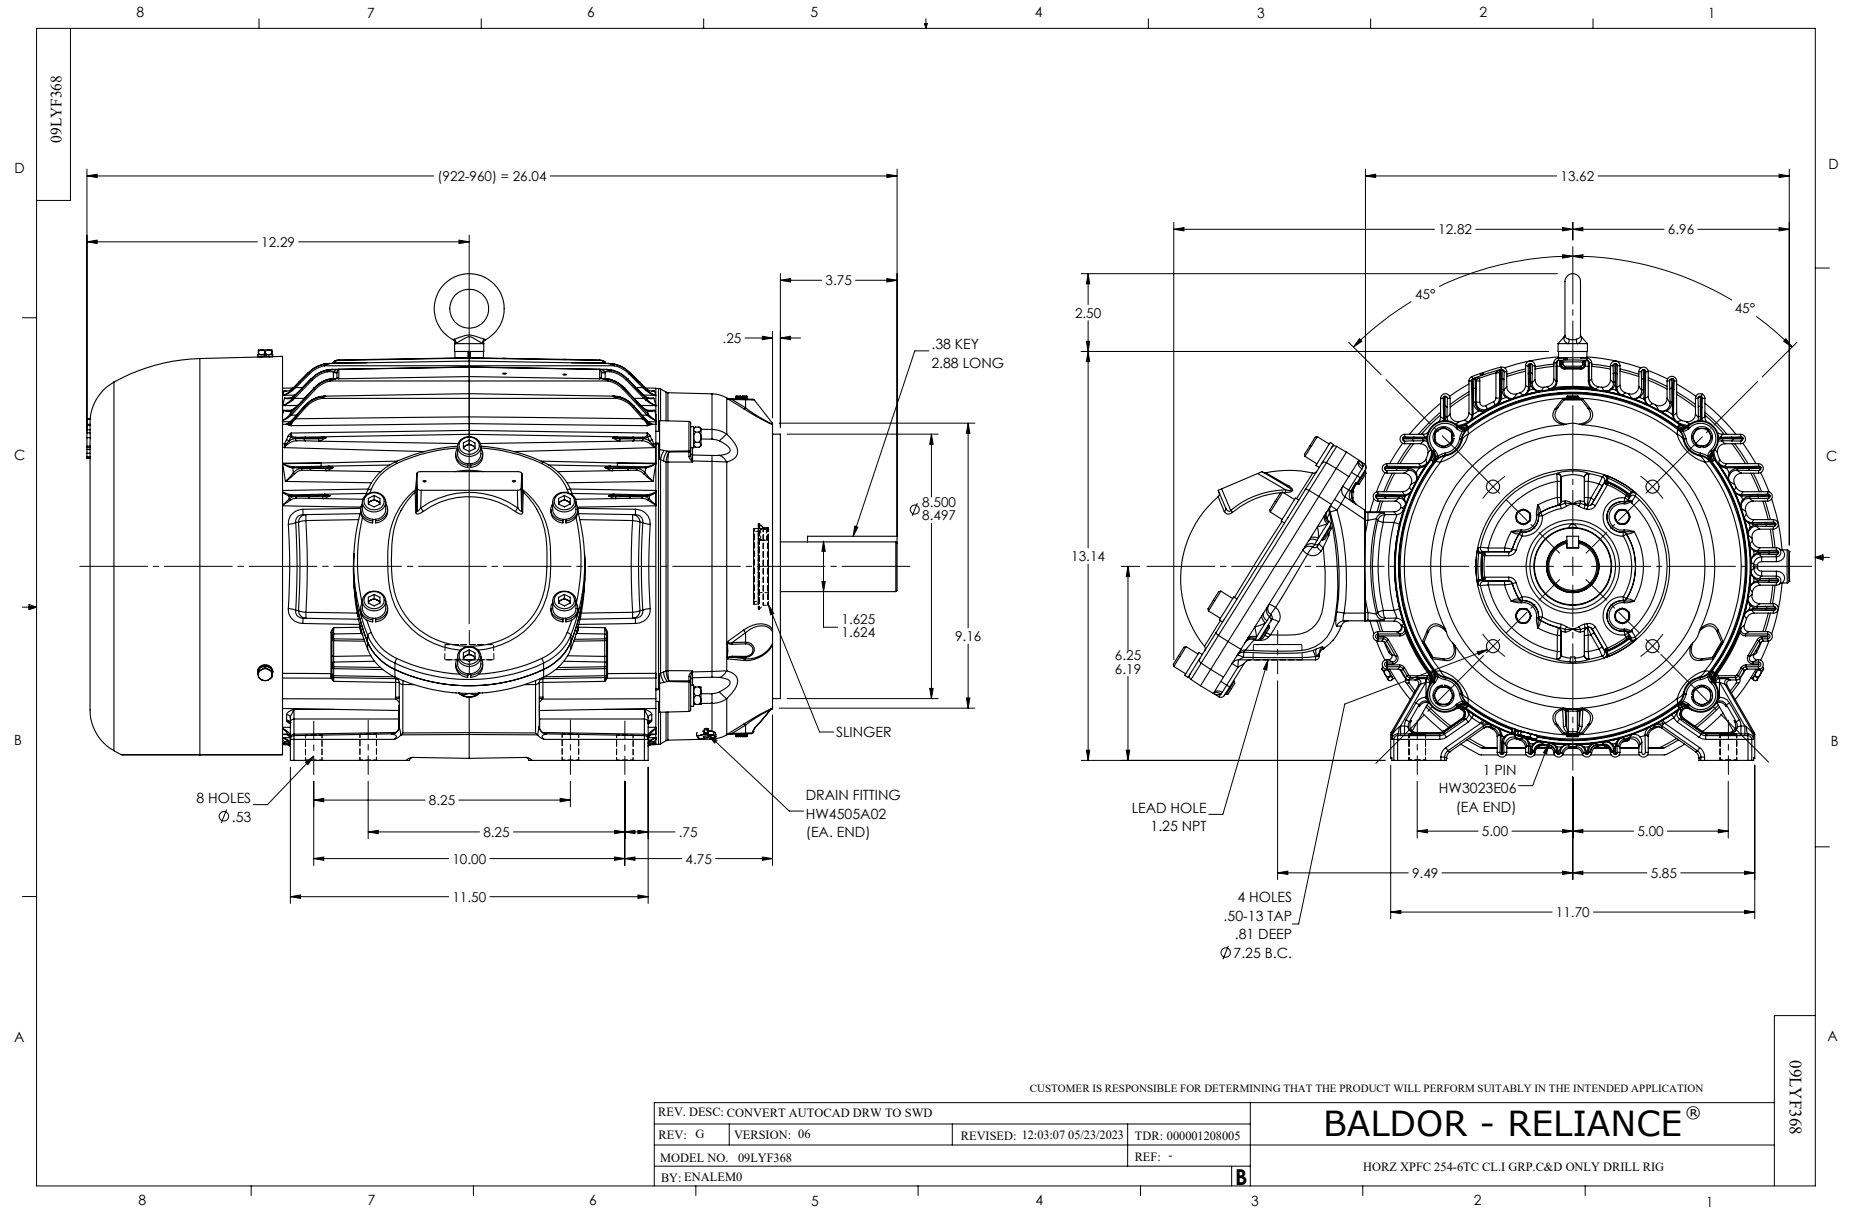

CD0180

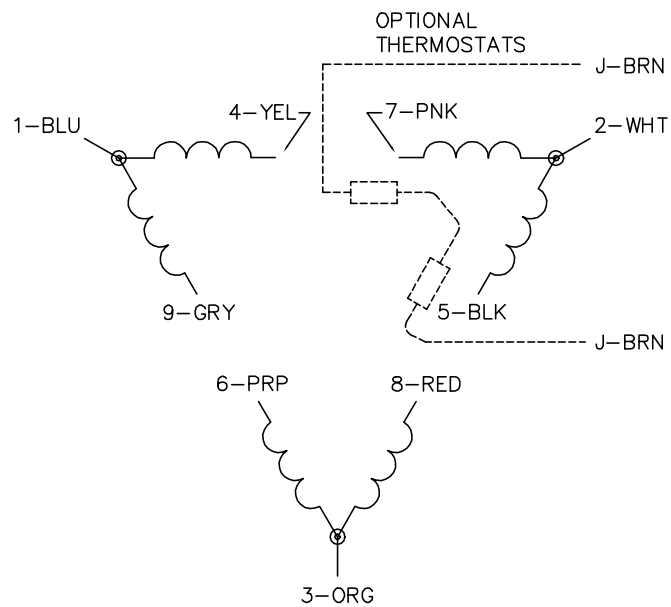
LOW VOLTAGE
(2D)

HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: -


BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1