

ABB BALDOR RELIANCE III

Customer information packet

CEM7056T-I

20//15 NEMA MG-1 PT.5, IP55HP, 1770//147

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	XPFC
Frame	256TC
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 50 HZ 20.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	48.000 A @ 230.0 V 52.000 A @ 208.0 V 44.000 A @ 190.0 V 24.000 A @ 460.0 V 22.000 A @ 380.0 V
Design Code	A
Drip Cover	No Drip Cover

Part Detail

Revision	P
Type	AC
Mech. spec.	09F368
Base	
Status	PRD/A
Elec. spec.	09WGT459
Layout	09LYF368
Eff. date	02-21-2024
CD Diagram	CD0180
Poles	04
Leads	9#10
Proprietary	False
Created date	11-20-2017

Duty Rating	CONT
Efficiency @ 100% Load	93.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	22.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X0960M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	26.00 IN
Power Factor	83
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible

Shaft Slinger Indicator	Shaft Slinger
Speed	1470 rpm 1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP0977XPSLEV												
NO.								CC	010A			
SER.								TEMP CODE		T3C		
SPEC.	09F368T459G1											
CAT.NO.	CEM7056T-I											
HP	20//15 NEMA MG-1 PT.5,IP55											
VOLTS	230/460//190/380											
AMPS	48/24//44/22											
RPM	1770//1470					MOTOR WEIGHT			339			
HERTZ	60//50	PH	3	CL	F	DE BRG	6309					
SER.F.	1.15	DES	A	CODE		J	ODE BRG		6208			
FRAME	256TC	GREASE		POLYREX EM								
RATING	40C AMB-CONT											
					NEMA-NOM-EFF			93		PF	83	
	55C AMB @ 1.0 SF,60C RISE											

AC Induction Motor Performance Data

Record # 68069

Typical performance - not guaranteed values

Winding: 09WGT459-R010			Type: 0960M		Enclosure: XPFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		20//15		Full Load Torque		59.27 LB-FT	
Volts		230/460//190/380		Start Configuration		direct on line	
Full Load Amps		48/24//44/22		Breakdown Torque		232 LB-FT	
R.P.M.		1770//1470		Pull-up Torque		126 LB-FT	
Hz	60//50	Phase	3	Locked-rotor Torque		141 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		198 A
Service Factor (S.F.)		1.15		No-load Current		10.4 A	
NEMA Nom. Eff.		93	Power Factor	83	Line-line Res. @ 25°C		0.33814 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		58°C	
S.F. Amps				Temp. Rise @ S.F. Load		70°C	
				Locked-rotor Power Factor		26.5	

Load Characteristics 460 V, 60 Hz, 20 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	45	67	78	83	86	87	85
Efficiency	89.2	93	93.7	93.6	93.1	92.4	93.3
Speed	1793.2	1786.4	1779.1	1771.9	1763.7	1755.3	1767
Line amperes	11.8	15	19.2	24	29.3	34.9	27.2


ABB Motors and Mechanical Inc.

WINDING # 09WGT459

Typical performance - not guaranteed values.

20 HP 3 PH 60 HZ 1771.9 RPM 460 V 0960M

TORQUES (LB-FT): PO=232 PU=126 LR=141 LRA=198

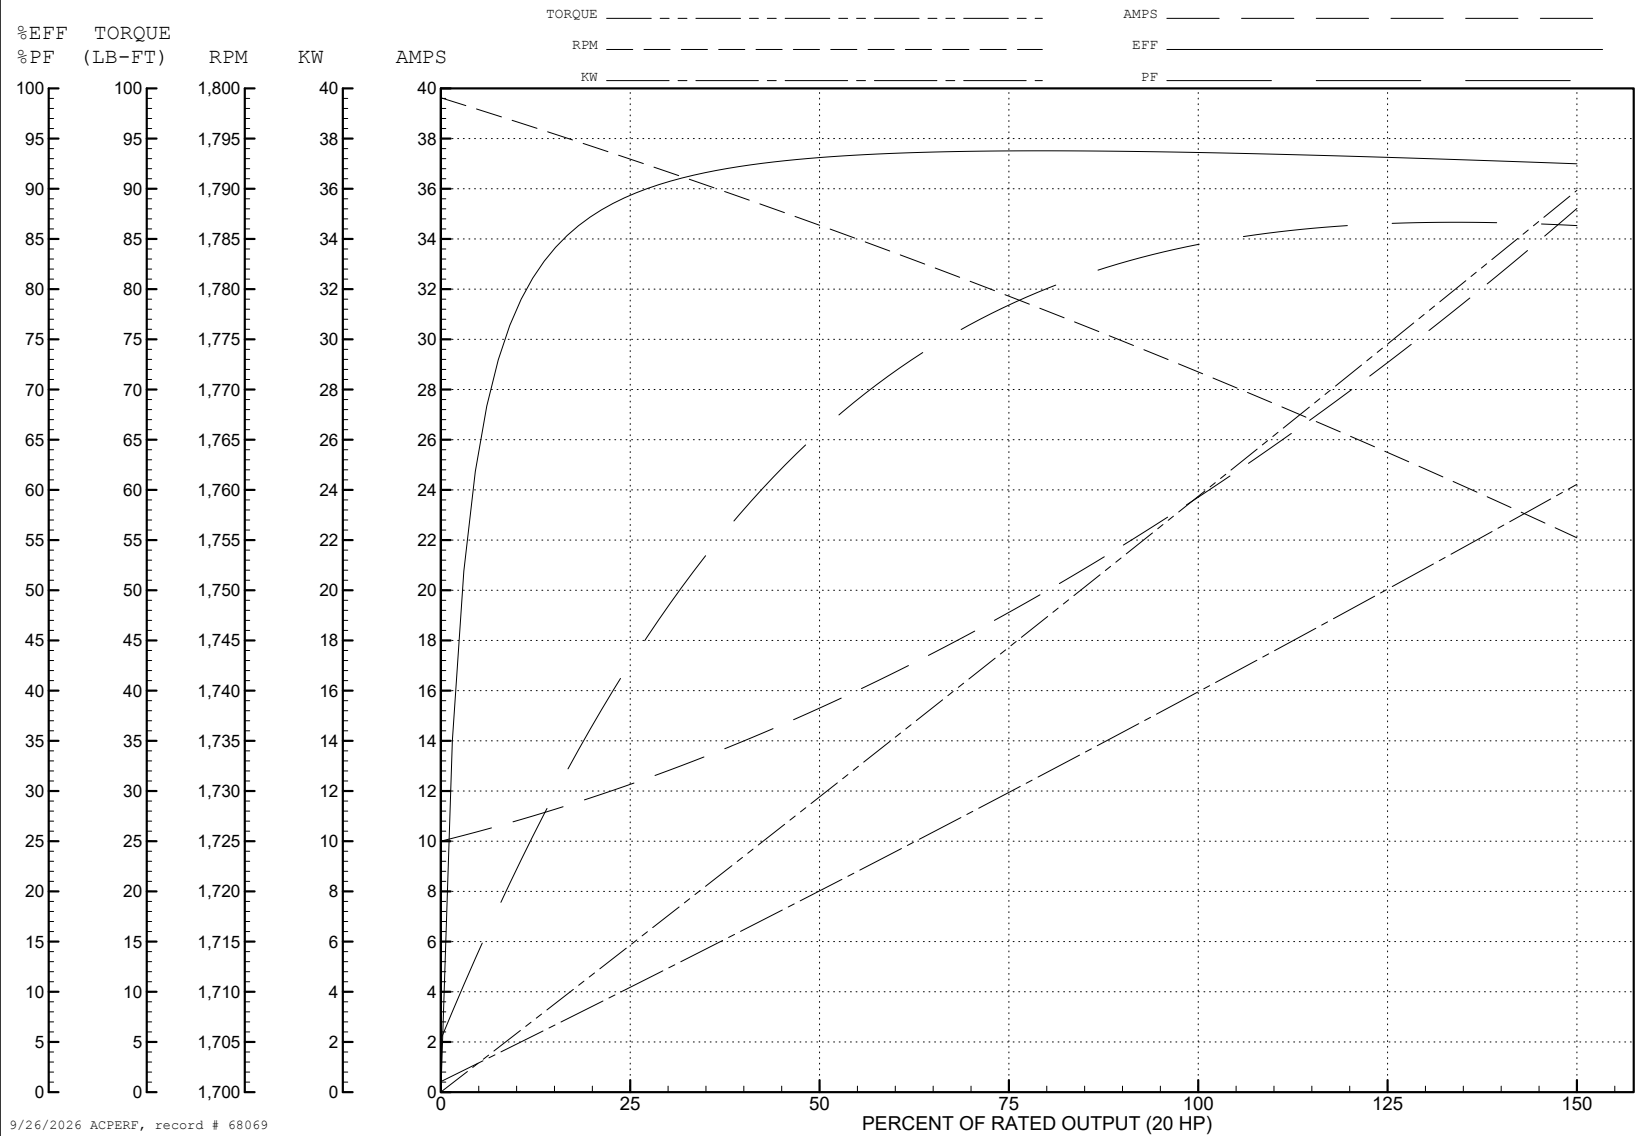

AC Induction Motor Performance Data

Record # 68070

Typical performance - not guaranteed values

Winding: 09WGT459-R010			Type: 0960M		Enclosure: XPFC		
Nameplate Data				380 V, 50 Hz: High Voltage Connection			
Rated Output (HP)		20//15		Full Load Torque		53.45 LB-FT	
Volts		230/460//190/380		Start Configuration		direct on line	
Full Load Amps		48/24//44/22		Breakdown Torque		224 LB-FT	
R.P.M.		1770//1470		Pull-up Torque		131 LB-FT	
Hz	60//50	Phase	3	Locked-rotor Torque		146 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		193 A
Service Factor (S.F.)		1.15		No-load Current		10.16 A	
NEMA Nom. Eff.		93	Power Factor	83	Line-line Res. @ 25°C		0.316 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		50°C	
S.F. Amps				Temp. Rise @ S.F. Load		61°C	
				Locked-rotor Power Factor		29.3	
				Rotor inertia		2.65 LB-FT2	

Load Characteristics 380 V, 50 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	43	66	77	83	86	87	85
Efficiency	88	92.2	93.1	93.1	92.5	91.8	92.7
Speed	1494	1488	1481	1475	1467	1460	1470
Line amperes	11.32	14.06	17.76	22.07	26.82	31.83	24.9


ABB Motors and Mechanical Inc.


WINDING # 09WGT459

Typical performance - not guaranteed values.




15 HP 3 PH 50 HZ 1475 RPM 380 V 0960M

TORQUES (LB-FT): PO=224 PU=131 LR=146 LRA=193

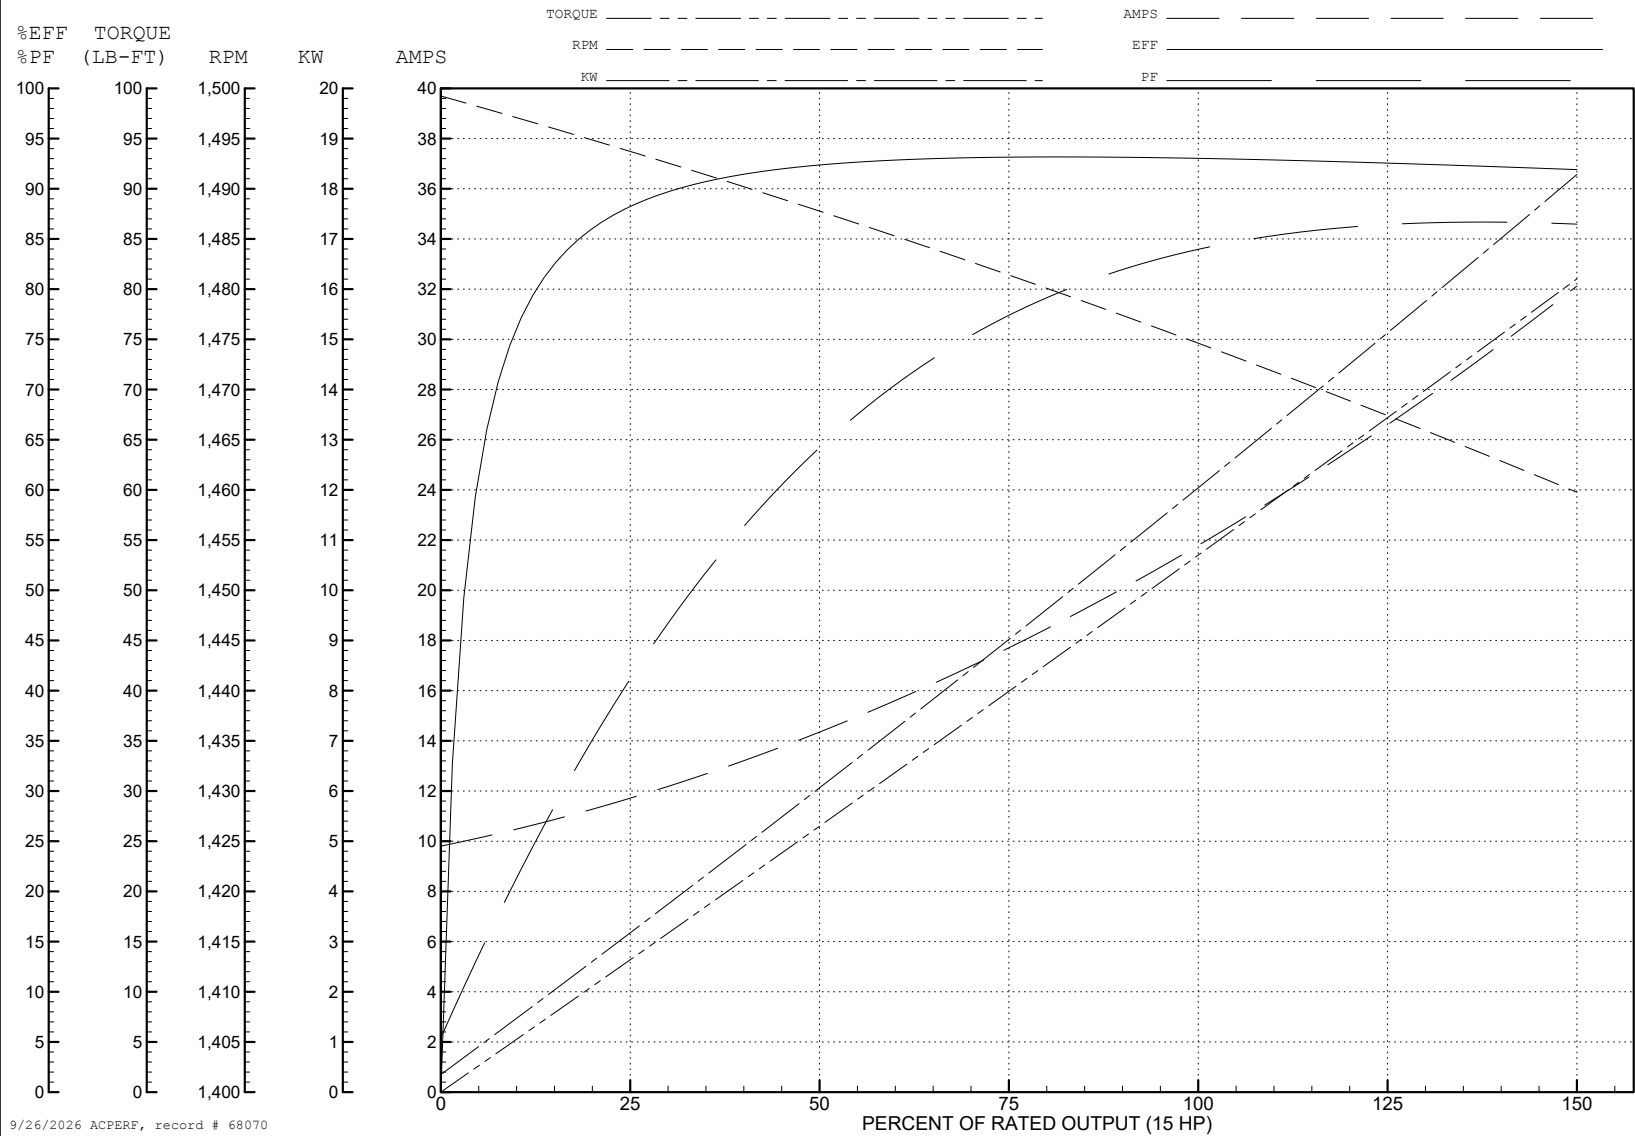

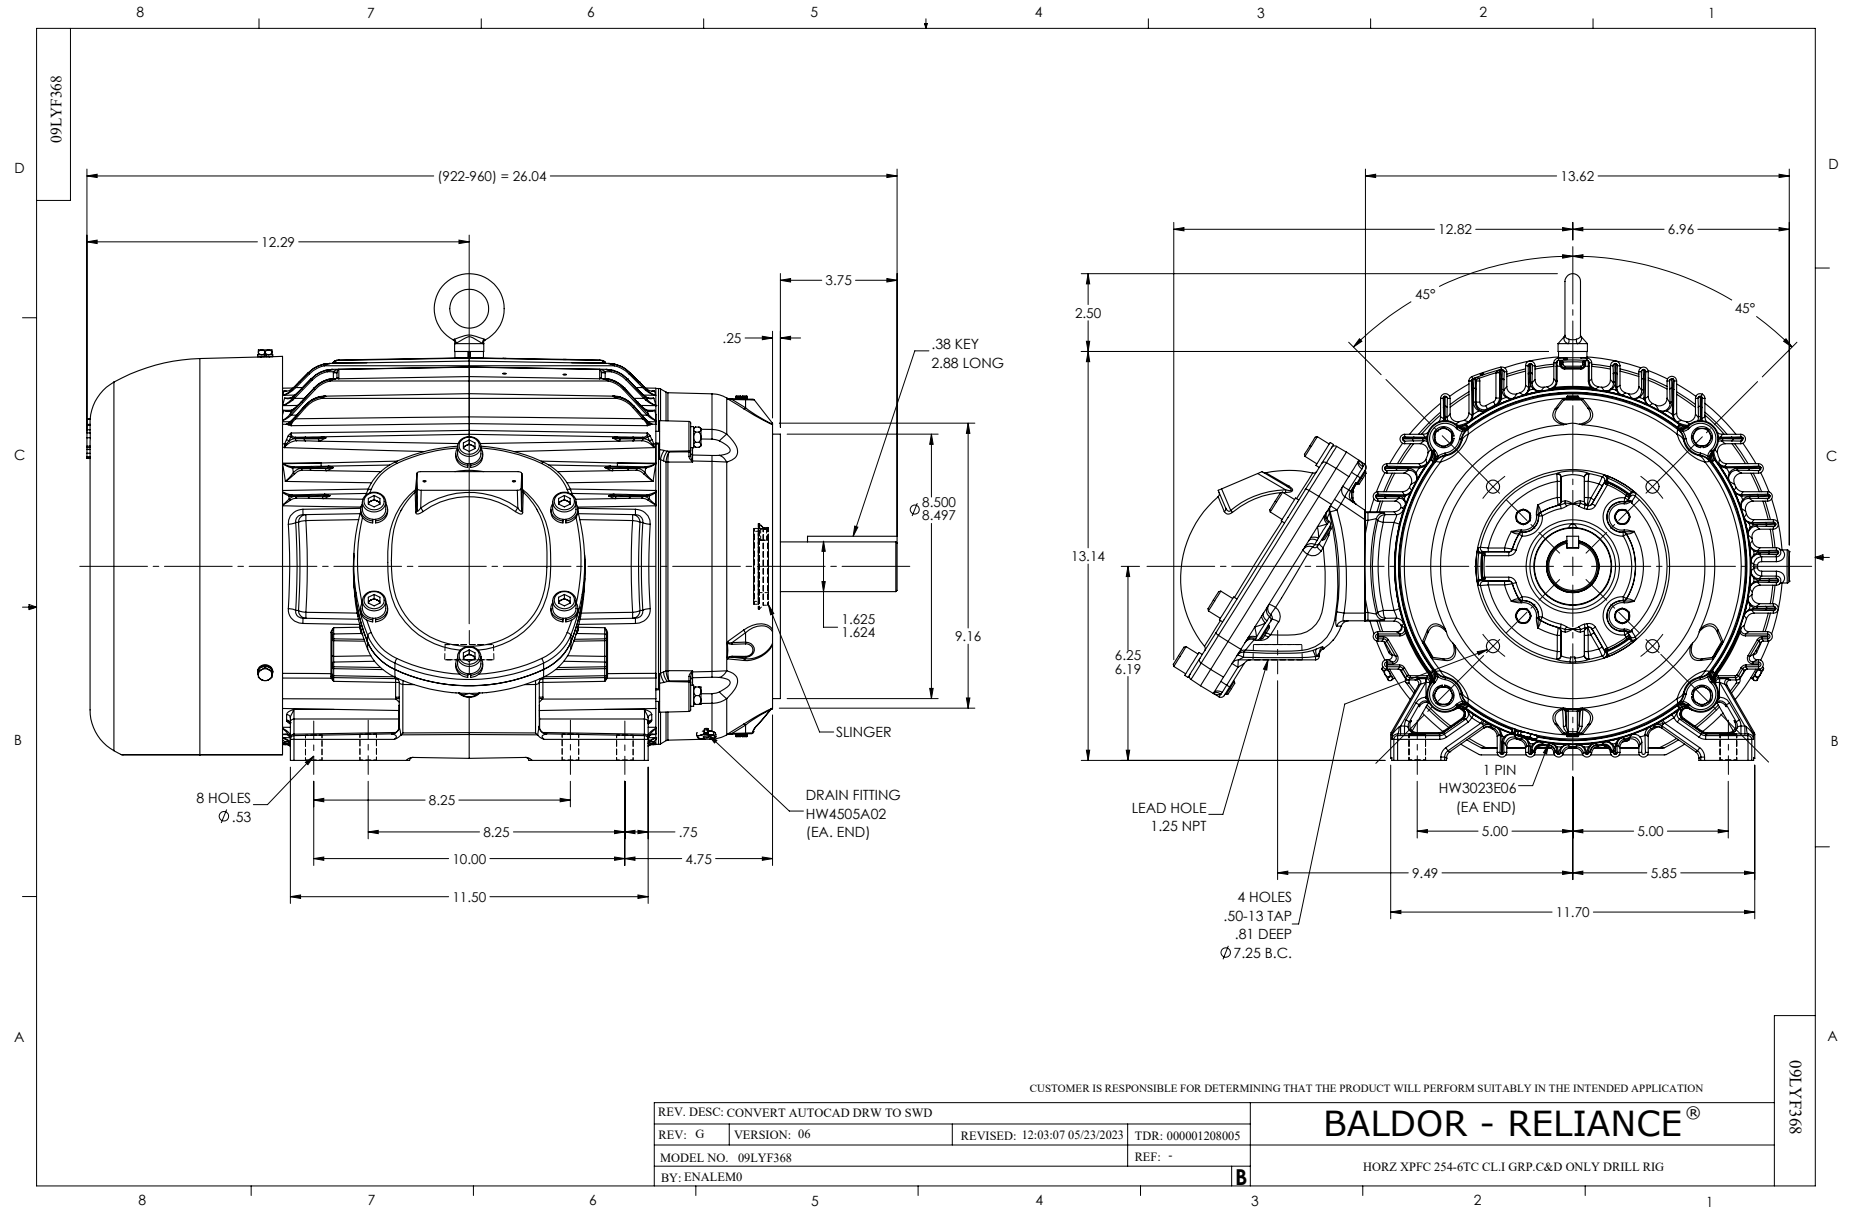

CD0180

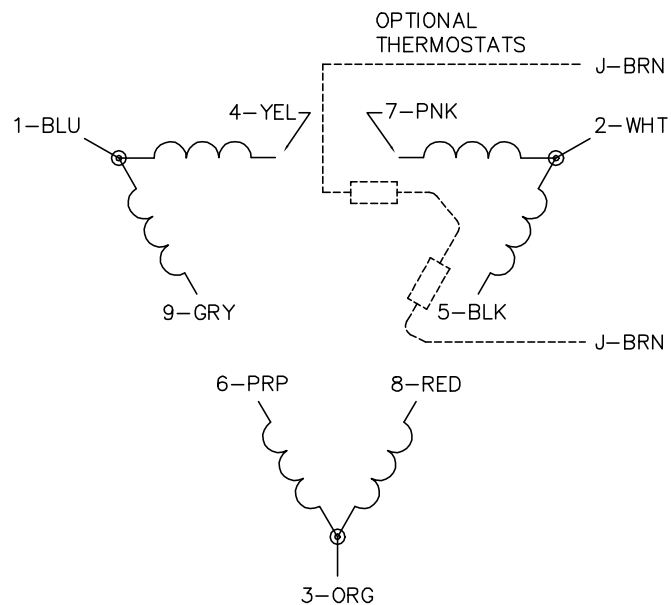
LOW VOLTAGE
(2D)

HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —


BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1