ABB BALDOR RELIANCE

Customer information packet

CEM7060T

30//25HP, 1770//1470RPM, 3PH, 60//50HZ, 286T
Class - CLI GP D; CLII GP F,G
Division - Division I

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/17/2026 11:25:25 PM

Specifications

Enclosure	XPFC
Frame	286TC
Frame Material	Iron
Frequency	50.00 Hz
	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 50 HZ
	30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	380.0 V @ 50 HZ
	230.0 V @ 60 HZ
	190.0 V @ 50 HZ
Agency Approvals	CSA
	UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	76.000 A @ 208.0 V
	74.000 A @ 190.0 V
	72.000 A @ 230.0 V
	37.000 A @ 380.0 V
	36.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT

Part Detail

Revision	V
Type	AC
Mech. spec.	10E251
Base	
Status	PRD/A
Elec. spec.	10WGY758
Layout	10LYE251
Eff. date	02-15-2024
CD Diagram	CD0005
Poles	04
Leads	9#10
Proprietary	False
Created date	06-10-2010

Efficiency @ 100% Load	93.6 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	36.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X1056M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	28.61 IN
Power Factor	83
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger

Speed	1470 rpm
	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1426XPSLEV							
NO.		**CC**	010A				
SER.							
SPEC.	10E251Y758G1						
CAT.NO.	CEM7060T						
HP	30//25	**T. CODE**	T3C				
VOLTS	230/460//190/380						
AMPS	72/36//74/37						
RPM	1770//1470						
HZ	60//50	**PH**	3	**CL**	F		
SER.F.	1.00	**DES**	A	**CODE**	G		
RATING	40C AMB-CONT						
FRAME	286TC			**NEMA-NOM-EFF**	93.6		
		PF	83				
BLANK							

AC Induction Motor Performance Data
Record # 53248
Typical performance - not guaranteed values

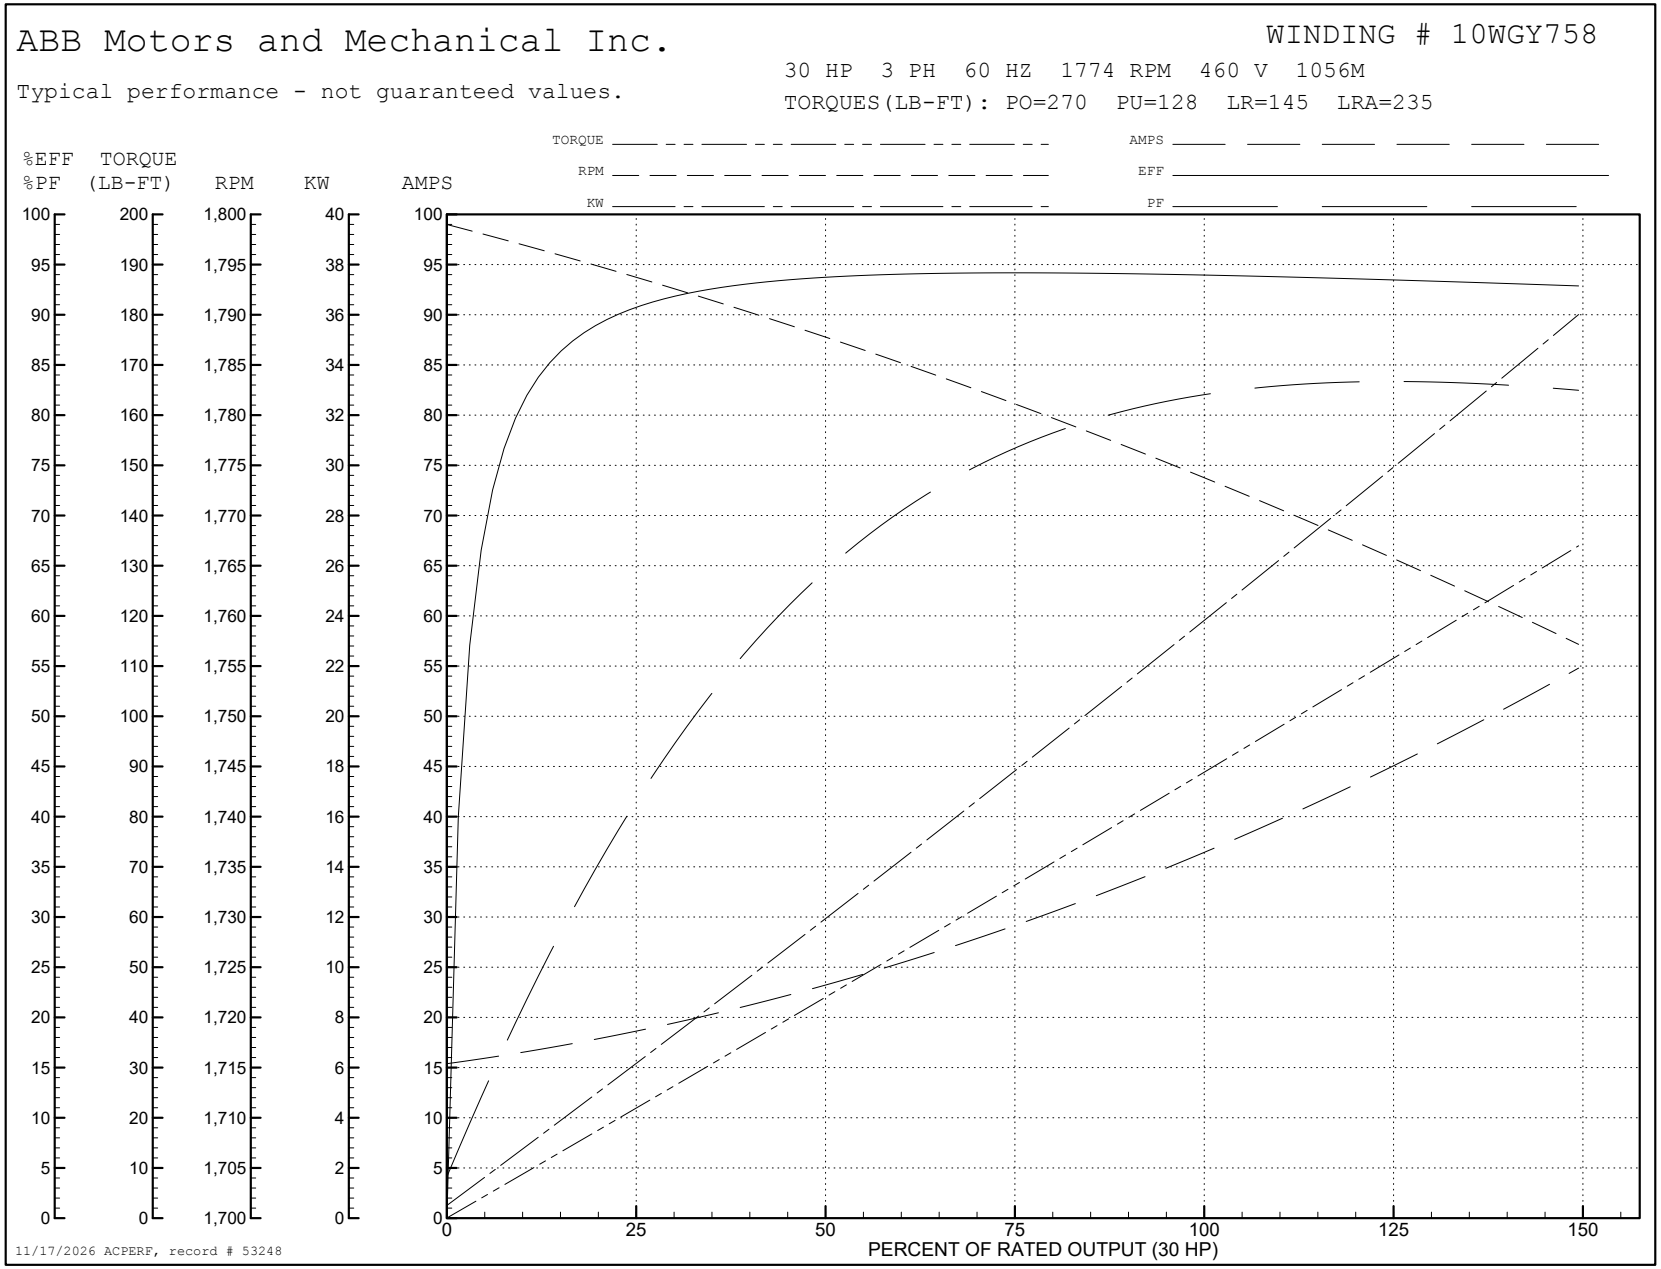
Winding: 10WGY758-R017	**Type:** 1056M	**Enclosure:** XPFC

Nameplate Data			
Rated Output (HP)			30//25
Volts			230/460//190/380
Full Load Amps			72/36//74/37
R.P.M.			1770//1470
Hz	60//50	**Phase**	3
NEMA Design Code	B	**KVA Code**	G
Service Factor (S.F.)			1
NEMA Nom. Eff.	93.6	**Power Factor**	83
Rating - Duty			40C AMB-CONT

460 V, 60 Hz: High Voltage Connection	
Full Load Torque	89.1 LB-FT
Start Configuration	direct on line
Breakdown Torque	270 LB-FT
Pull-up Torque	128 LB-FT
Locked-rotor Torque	145 LB-FT
Starting Current	235 A
No-load Current	15.9 A
Line-line Res. @ 25ºC	0.226 Ω
Temp. Rise @ Rated Load	57°C
Locked-rotor Power Factor	32
Rotor inertia	4.45 LB-FT2

Load Characteristics 460 V, 60 Hz, 30 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	44	66	75	83	83	83
Efficiency	90.6	93.7	94.3	94	93.2	93
Speed	1794	1787	1781	1774	1766	1757
Line amperes	17.9	23	30.1	36.2	45.3	54.5


ABB Motors and Mechanical Inc.
WINDING # 10WGY758
Typical performance - not guaranteed values.
30 HP 3 PH 60 HZ 1774 RPM 460 V 1056M
TORQUES(LB-FT): PO=270 PU=128 LR=145 LRA=235
TORQUE
RPM
KW
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
KW
AMPS
PERCENT OF RATED OUTPUT (30 HP)
11/17/2026 ACPERF, record # 53248

AC Induction Motor Performance Data
Record # 53249
Typical performance - not guaranteed values

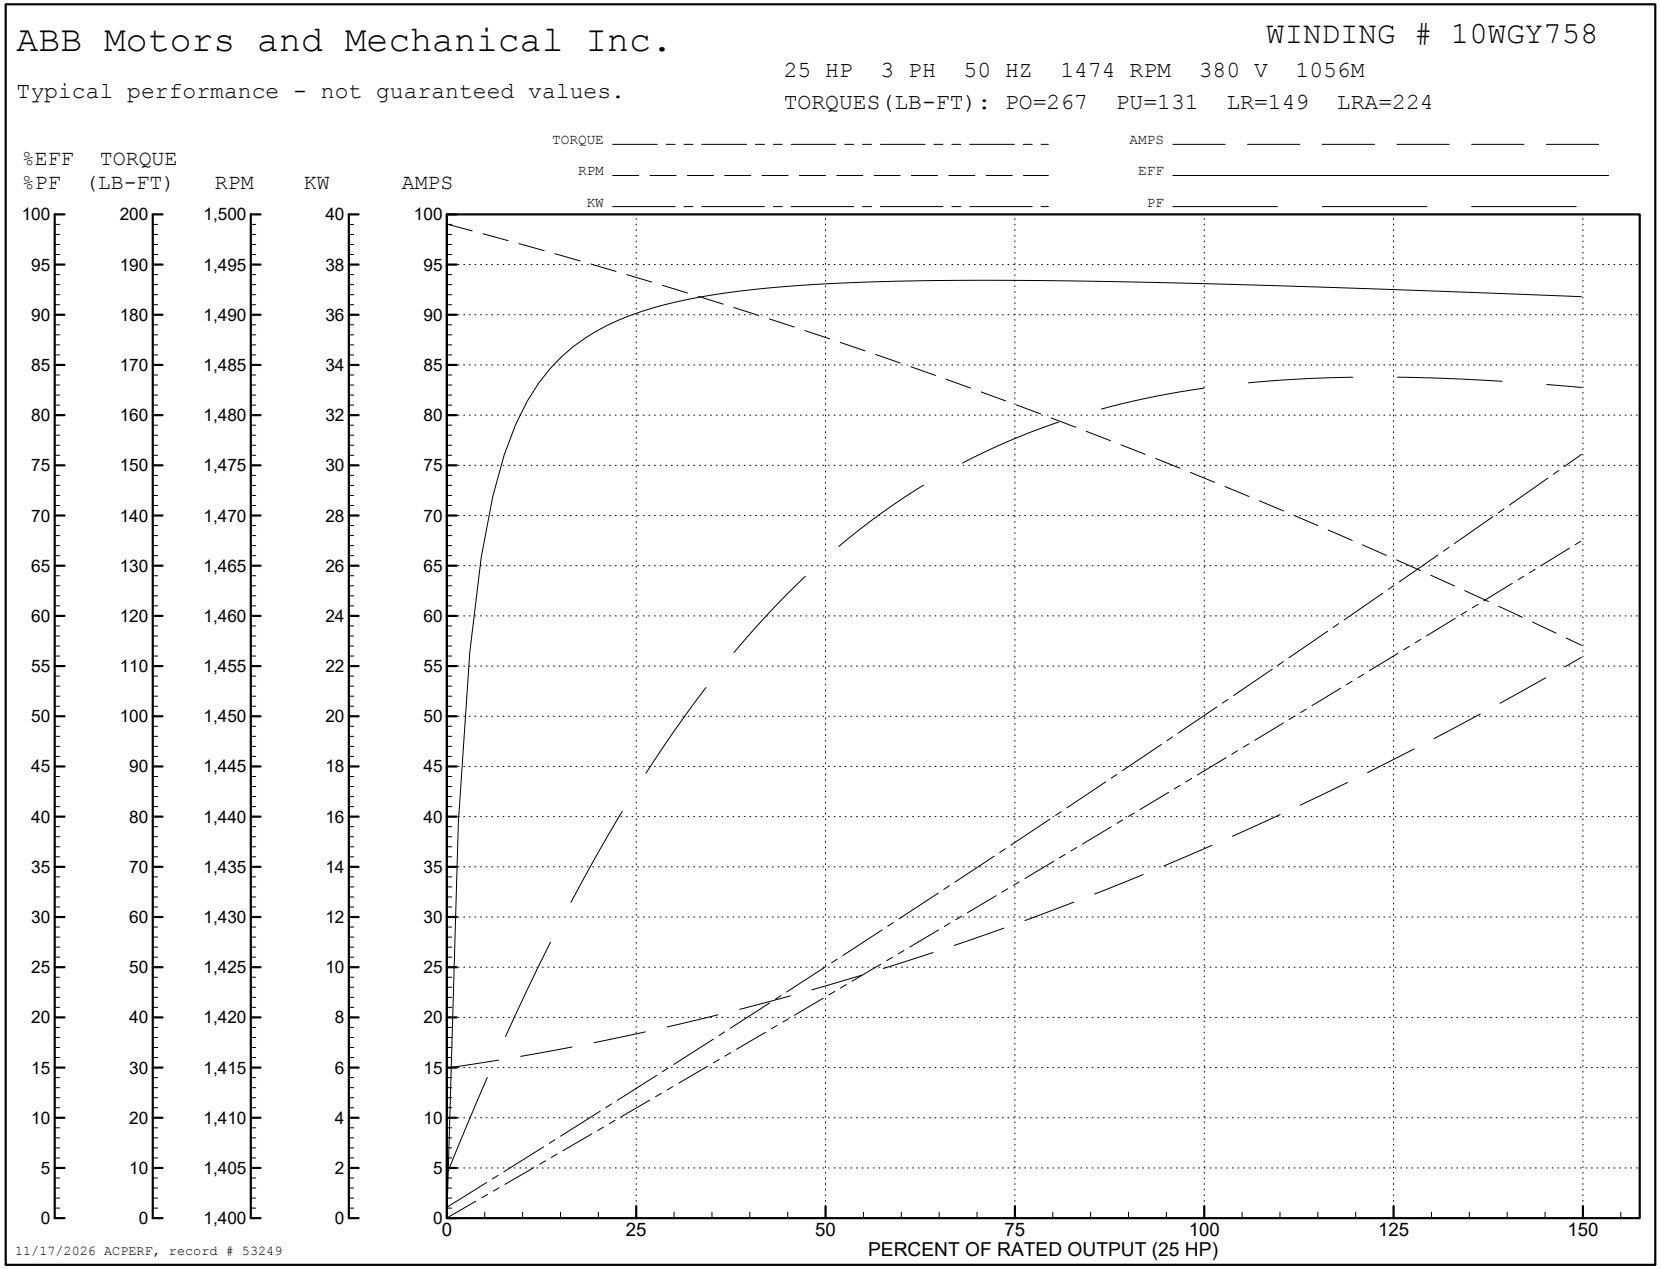
Winding: 10WGY758-R017	**Type:** 1056M	**Enclosure:** XPFC

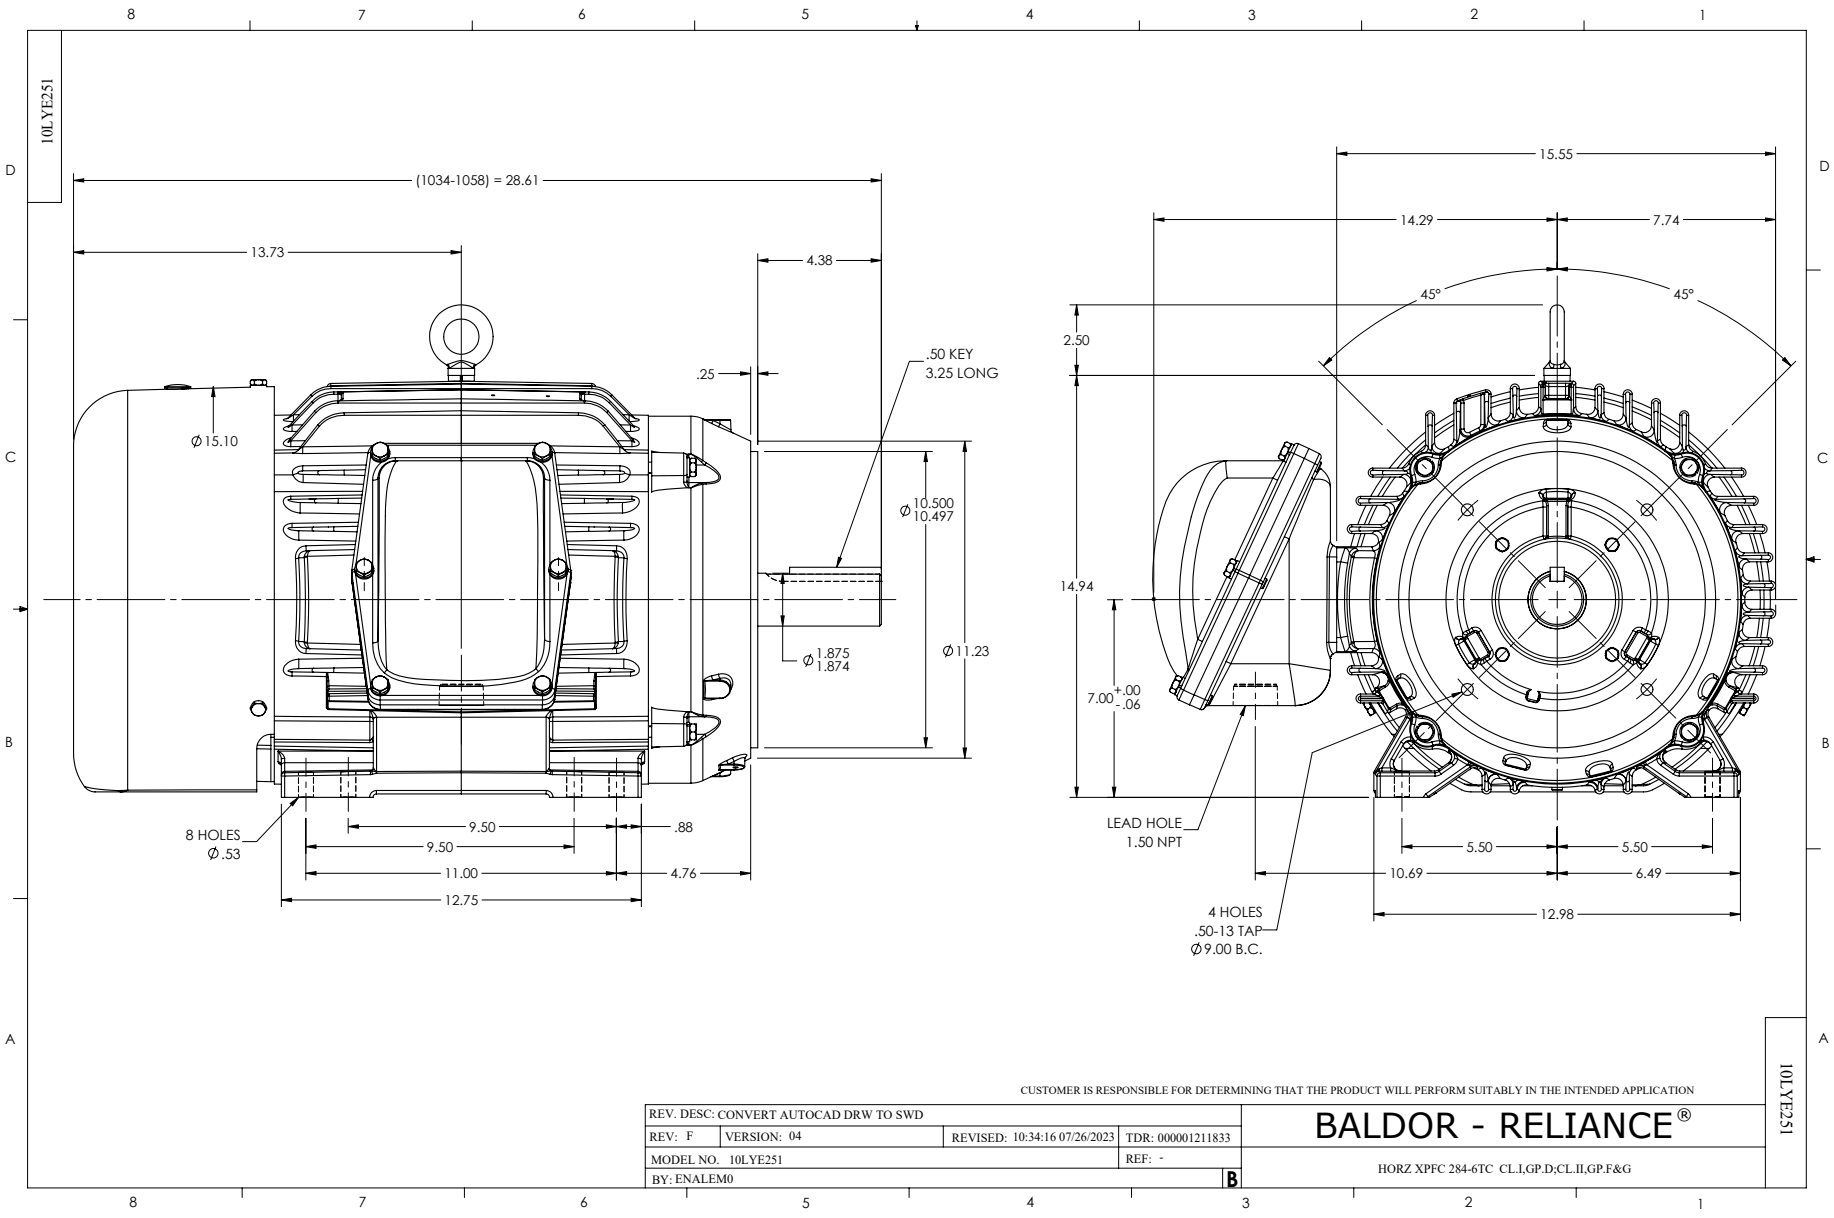
Nameplate Data			
Rated Output (HP)			30//25
Volts			230/460//190/380
Full Load Amps			72/36//74/37
R.P.M.			1770//1470
Hz	60//50	**Phase**	3
NEMA Design Code	B	**KVA Code**	G
Service Factor (S.F.)			1
NEMA Nom. Eff.	93.6	**Power Factor**	83
Rating - Duty			40C AMB-CONT

380 V, 50 Hz: High Voltage Connection	
Full Load Torque	89.3 LB-FT
Start Configuration	direct on line
Breakdown Torque	267 LB-FT
Pull-up Torque	131 LB-FT
Locked-rotor Torque	149 LB-FT
Starting Current	224 A
No-load Current	15.5 A
Line-line Res. @ 25ºC	0.226 Ω
Temp. Rise @ Rated Load	57°C
Locked-rotor Power Factor	35
Rotor inertia	4.45 LB-FT2

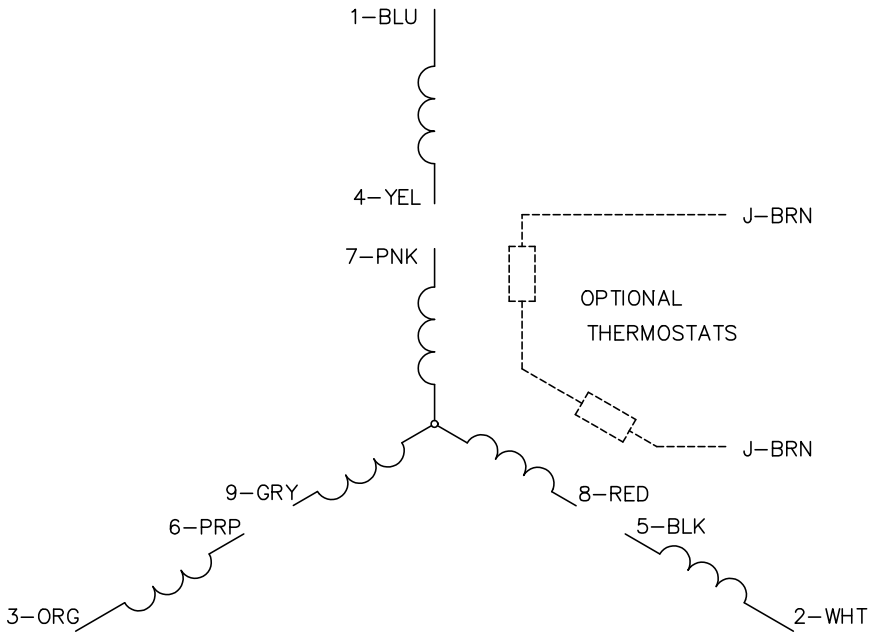
Load Characteristics 380 V, 50 Hz, 25 HP

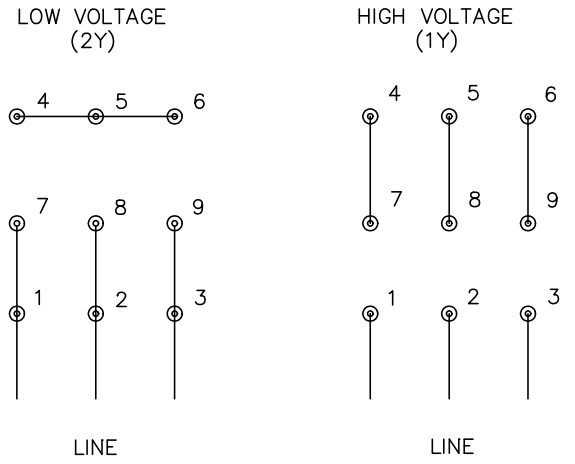
% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	45	67	76	83	83	83
Efficiency	90	93.2	93.7	93.4	91.9	92
Speed	1494	1487	1481	1474	1466	1457
Line amperes	17.6	22.9	30.2	36.5	45.9	55.5


ABB Motors and Mechanical Inc.
WINDING # 10WGY758
Typical performance - not guaranteed values.
25 HP 3 PH 50 HZ 1474 RPM 380 V 1056M
TORQUES(LB-FT): PO=267 PU=131 LR=149 LRA=224
TORQUE
RPM
KW
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
KW
AMPS
PERCENT OF RATED OUTPUT (25 HP)
11/17/2026 ACPERF, record # 53249


10LYE251
(1034-1058) = 28.61
13.73
4.38
.25
.50 KEY
3.25 LONG
Ø15.10
Ø 10.500
10.497
Ø 1.875
1.874
Ø11.23
8 HOLES
Ø.53
9.50
9.50
.88
11.00
4.76
12.75
15.55
14.29
7.74
45°
45°
2.50
14.94
7.00 +.00 -.06
LEAD HOLE
1.50 NPT
5.50
5.50
10.69
6.49
12.98
4 HOLES
.50-13 TAP
Ø9.00 B.C.
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERT AUTOCAD DRW TO SWD
REV: F
VERSION: 04
REVISED: 10:34:16 07/26/2023
TDR: 000001211833
MODEL NO. 10LYE251
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
HORZ XPFC 284-6TC CL.I,GP.D;CL.II,GP.F&G
10LYE251

CD0005





NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS