



---

# Customer information packet

## CESWDNM3558-5

2HP, 1760RPM, 3PH, 60HZ, 56C, 3540M, TENV, F1, N

Class - None

Division - Not Applicable

## Specifications

Enclosure	TENV
Frame	56C
Frame Material	Stainless Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
XP Class and Group	None
XP Division	Not Applicable
Agency Approvals	NEMA PREMIUM NEMA_PREMIUM UR CSA EEV
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.200 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	87.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.2 a
Insulation Class	F

## Part detail

Revision	A
Type	AC
Mech. spec.	35S630
Base	
Status	PRD/A
Elec. spec.	35WGG440
Layout	35LYS630
Eff. date	02-14-2024
CD Diagram	CD0006
Poles	04
Leads	3#18
Proprietary	False
Created date	03-11-2022

Inverter Code	Inverter Ready
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3540M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	14.32 IN
Power Factor	77
Product Family	Wash Down Paint Free
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

**Nameplate**

<b>NP1669L</b>									
<b>CAT.NO.</b>	CESWDNM3558-5								
<b>SPEC.</b>	35S630G440G1								
<b>HP</b>	2								
<b>VOLTS</b>	575								
<b>AMP</b>	2.2								
<b>RPM</b>	1760								
<b>FRAME</b>	56C		<b>HZ</b>	60		<b>PH</b>	3		
<b>SER.F.</b>	1.15	<b>CODE</b>	M	<b>DES</b>	B	<b>CLASS</b>	F		
<b>NEMA-NOM-EFF</b>	87.5	<b>PF</b>	77						
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>	010A								
<b>DE</b>	6205		<b>ODE</b>	6203					
<b>ENCL</b>	TENV	<b>SN</b>							
<b>BLANK</b>	SFA 2.45								

**AC Induction Motor Performance Data**

Record # 91765

Typical performance - not guaranteed values

<b>Winding:</b> 35WGG440-R001		<b>Type:</b> 3540M		<b>Enclosure:</b> TENV	
<b>Nameplate Data</b>			<b>575 V, 60 Hz: Single Voltage Motor</b>		
<b>Rated Output (HP)</b>		2	<b>Full Load Torque</b>		5.96 LB-FT
<b>Volts</b>		575	<b>Start Configuration</b>		direct on line
<b>Full Load Amps</b>		2.2	<b>Breakdown Torque</b>		25.18 LB-FT
<b>R.P.M.</b>		1760	<b>Pull-up Torque</b>		15.43 LB-FT
<b>Hz</b>	60 Phase	3	<b>Locked-rotor Torque</b>		19.59 LB-FT
<b>NEMA Design Code</b>	B KVA Code	M	<b>Starting Current</b>		21.29 A
<b>Service Factor (S.F.)</b>		1.15	<b>No-load Current</b>		1.21 A
<b>NEMA Nom. Eff.</b>	87.5 Power Factor	77	<b>Line-line Res. @ 25°C</b>		11.8 Ω
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>		78°C
<b>S.F. Amps</b>		2.45	<b>Temp. Rise @ S.F. Load</b>		93°C
			<b>Locked-rotor Power Factor</b>		51.7438
			<b>Rotor inertia</b>		0.289 lb-ft <sup>2</sup>

**Load Characteristics 575 V, 60 Hz, 2 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	36	56	70	77	82	84	80
<b>Efficiency</b>	81	87.2	88.4	88	86.9	85.4	87.3
<b>Speed</b>	1788	1780	1771	1761	1749	1737	1754
<b>Line amperes</b>	1.3	1.51	1.83	2.2	2.63	3.11	2.46


ABB Motors and Mechanical Inc.

WINDING # 35WGG440


2 HP 3 PH 60 HZ 1760 RPM 575 V 3540M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=25.18 PU=15.43 LR=19.59 LRA=21.29

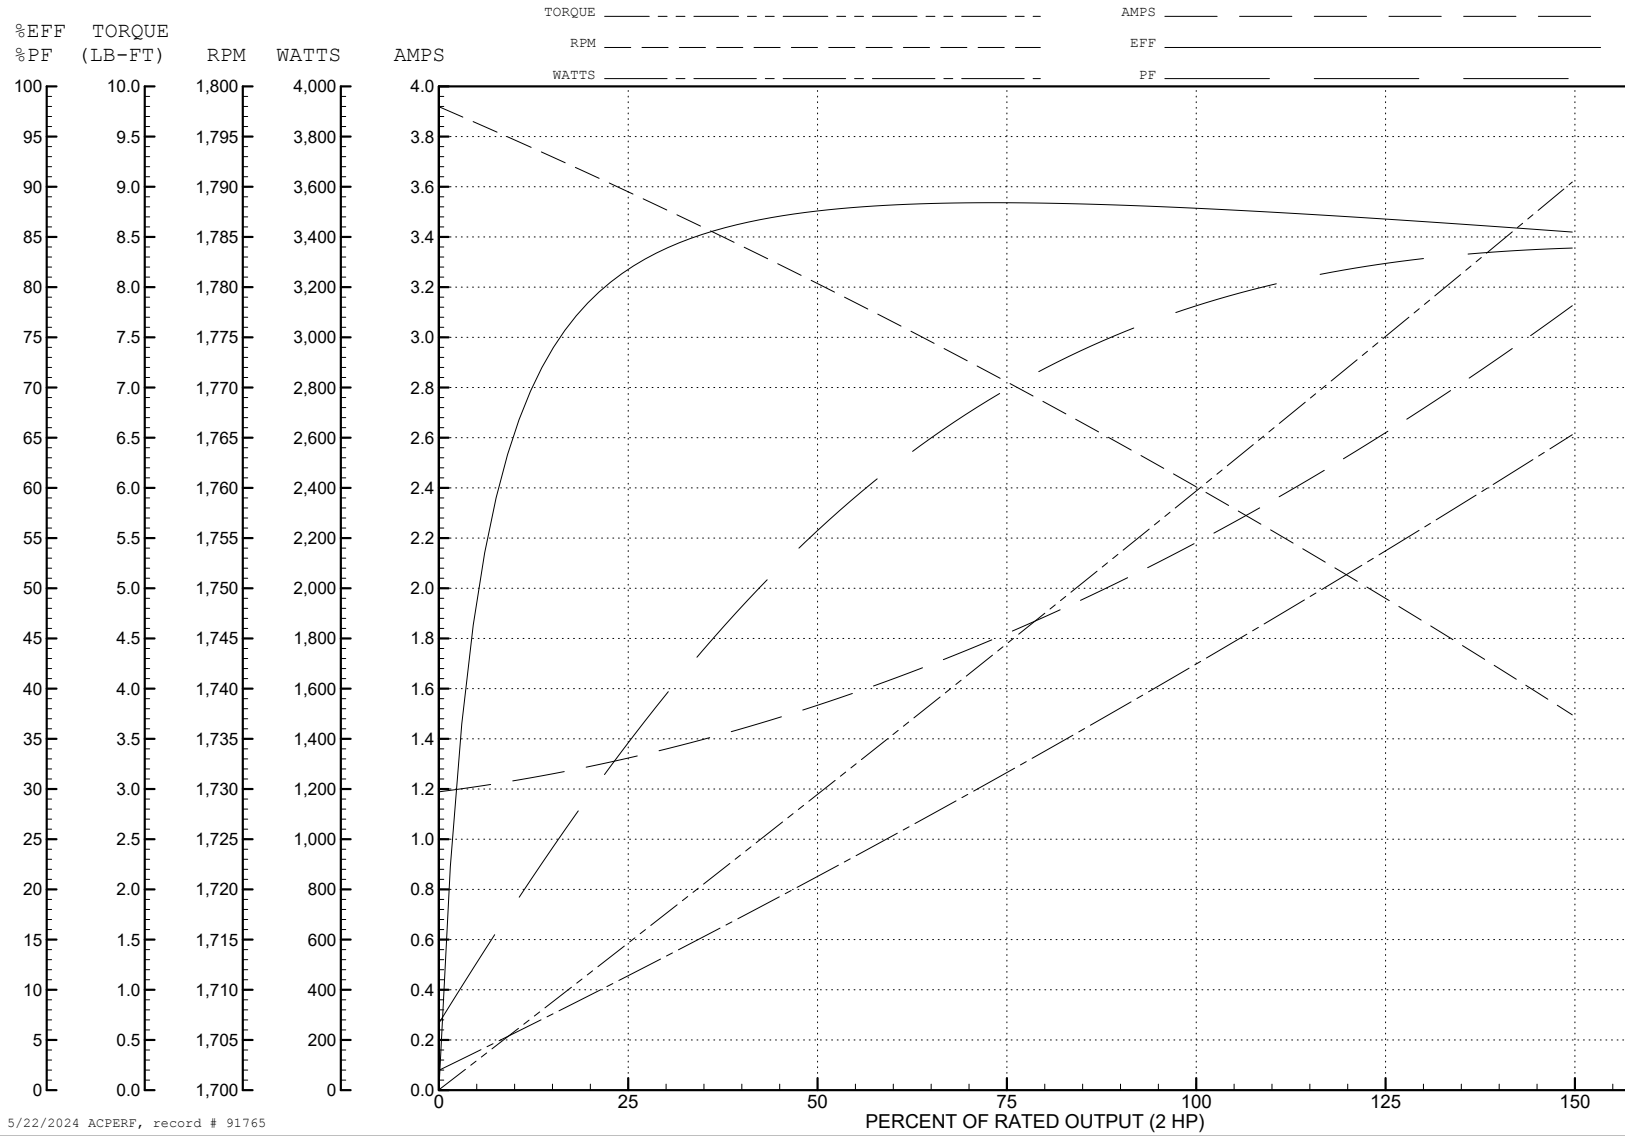

5/22/2024 ACPERF, record # 91765

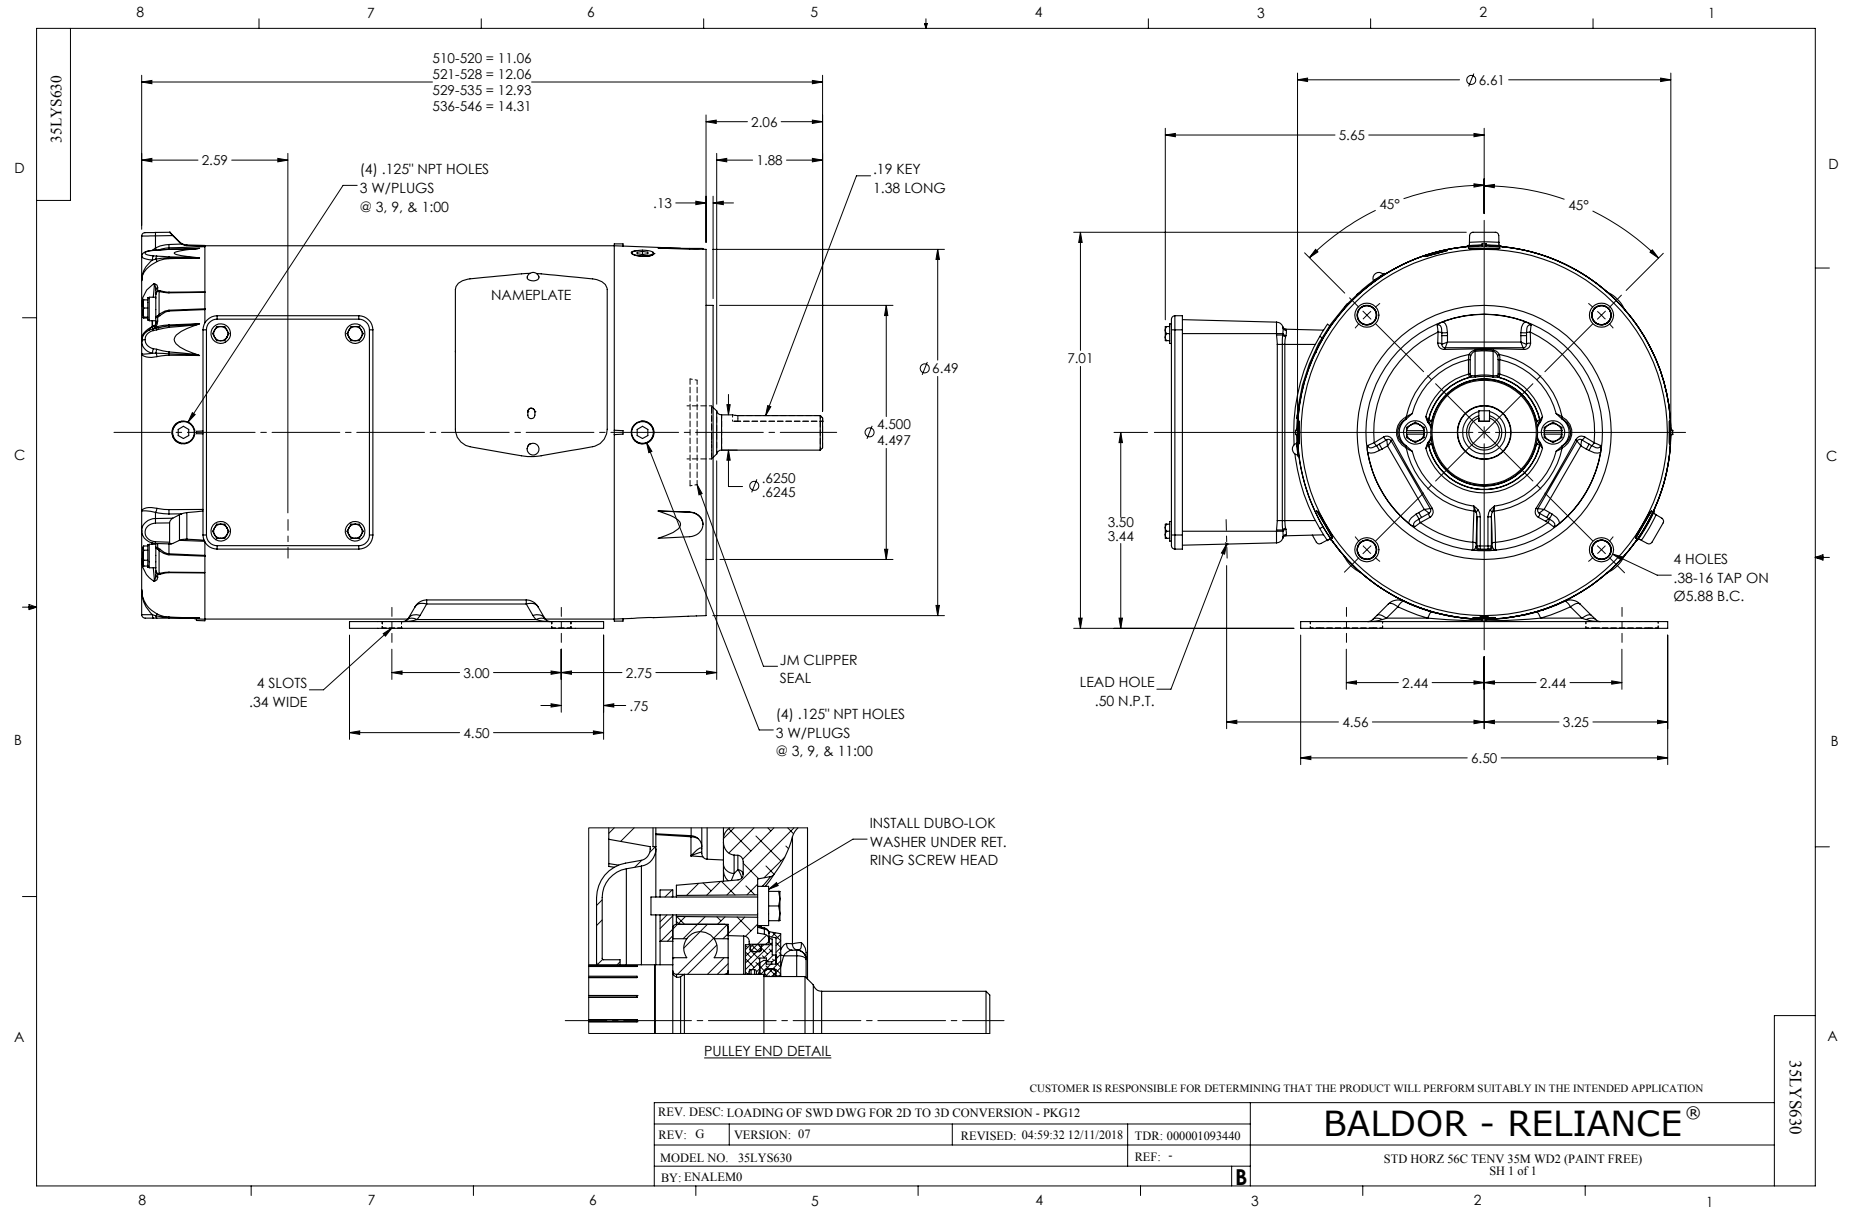

CD0006



NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIRO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1