ABB BALDOR RELIANCE

Customer information packet

CEWDM3550-H

1.5HP, 3500RPM, 3PH, 60HZ, 56HC, TENV, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/16/2026 4:30:38 PM

Specifications

Enclosure	TENV
Frame	56HC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CSA
	CSA EEV
	NEMA PREMIUM
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.000 A @ 230.0 V
	2.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	2.0 a

Part Detail

Revision	C
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	35WGR445
Layout	35LY-000-259
Eff. date	02-14-2024
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	06-26-2019

Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	IP55
KVA Code	N
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3528M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	12.06 IN
Power Factor	87
Product Family	Wash Down
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L								
CAT.NO.	CEWDM3550-H							
SPEC.	35-0000-0231							
HP	1.5							
VOLTS	230/460							
AMP	4/2							
RPM	3500							
FRAME	56HC	**HZ**	60			**PH**	3	
SER.F.	1.15	**CODE**	N	**DES**	B	**CLASS**	F	
NEMA-NOM-EFF	85.5	**PF**	87					
RATING	40C AMB-CONT							
CC	010A							
DE	6205	**ODE**	6203					
ENCL	TENV	**SN**						
BLANK								

AC Induction Motor Performance Data
Record # 67482
Typical performance - not guaranteed values

Winding: 35WGR445-R020	**Type:** 3528M	**Enclosure:** TENV

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			1.5	**Full Load Torque**	2.3 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			4/2	**Breakdown Torque**	12 LB-FT
R.P.M.			3500	**Pull-up Torque**	8.2 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	11 LB-FT
NEMA Design Code	B	**KVA Code**	N	**Starting Current**	23.5 A
Service Factor (S.F.)			1.15	**No-load Current**	0.9 A
NEMA Nom. Eff.	85.5	**Power Factor**	87	**Line-line Res. @ 25ºC**	6.95 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	73°C
S.F. Amps				**Temp. Rise @ S.F. Load**	84°C
				Locked-rotor Power Factor	48.4

Load Characteristics 460 V, 60 Hz, 1.5 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	51	71	81	87	90	91	89
Efficiency	73.8	82.5	85.2	86.1	86	85.4	86
Speed	3568	3544	3519	3493	3466	3434	3477
Line amperes	1.1	1.3	1.6	1.9	2.3	2.8	2.14


ABB Motors and Mechanical Inc.

WINDING # 35WGR445


1.5 HP 3 PH 60 HZ 3500 RPM 460 V 3528M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=12 PU=8.2 LR=11 LRA=23.5

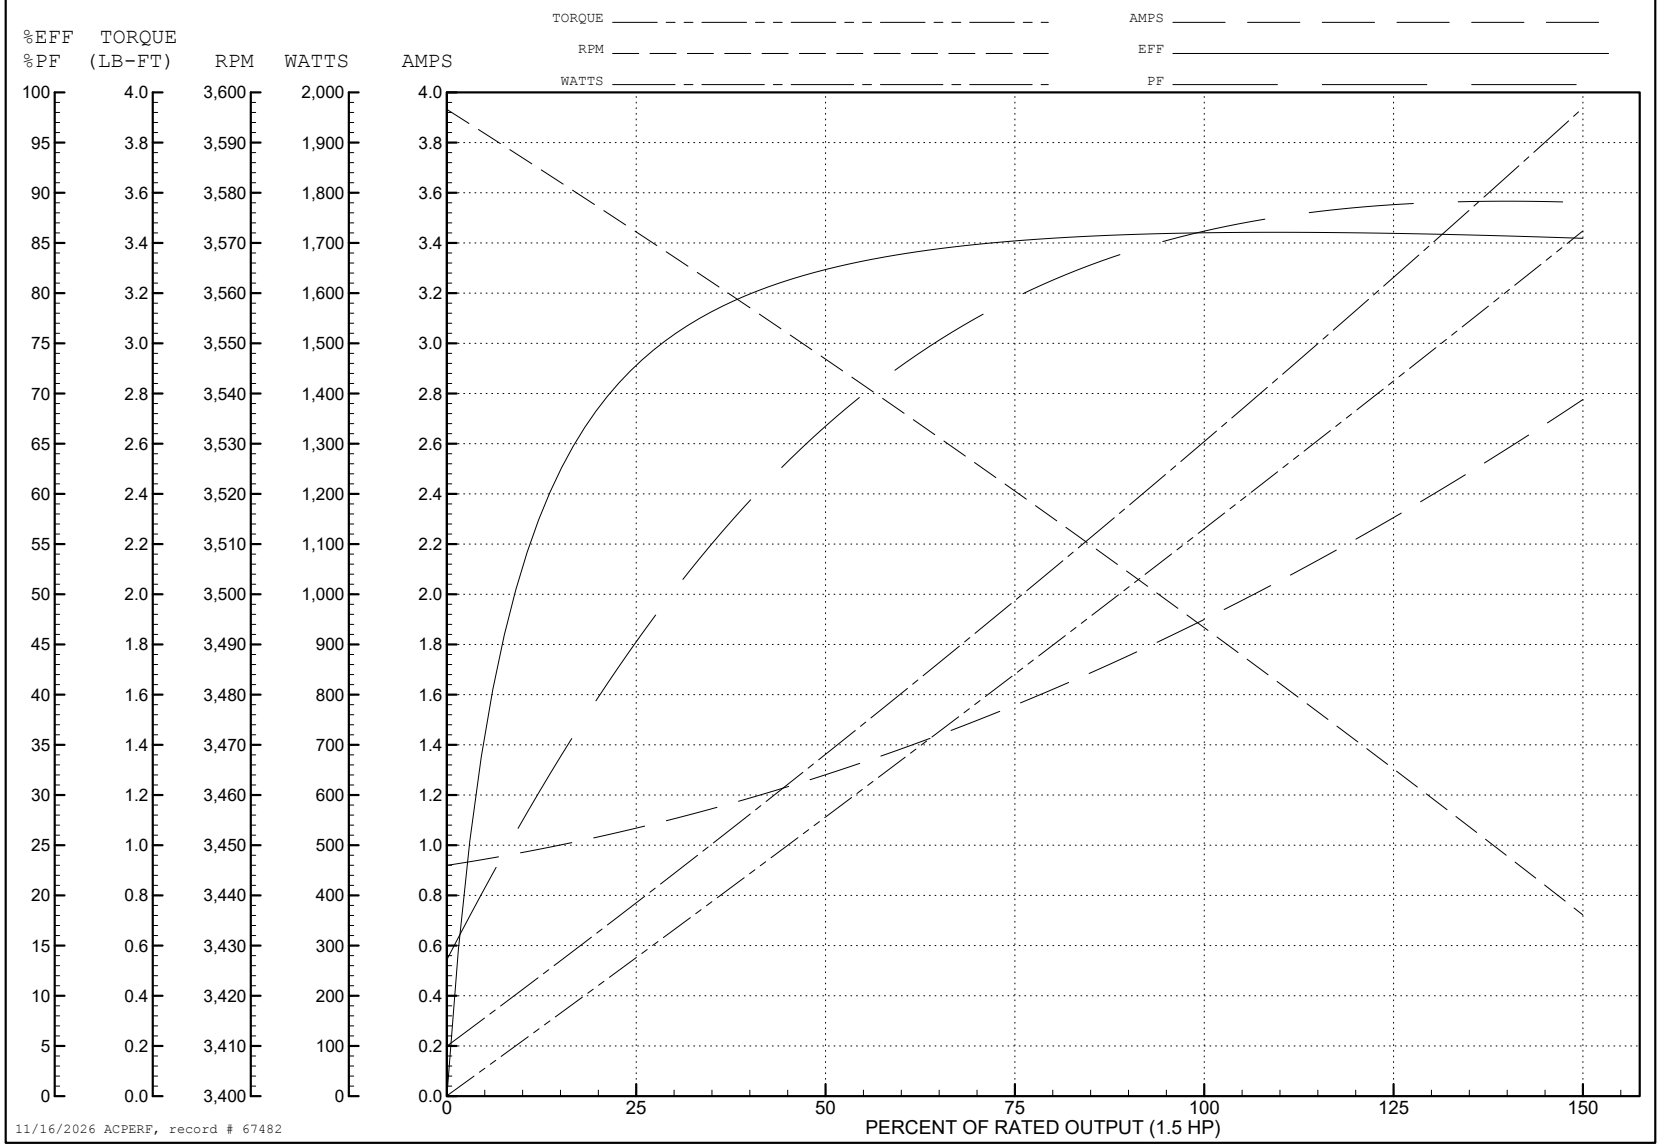

35LY-000-259

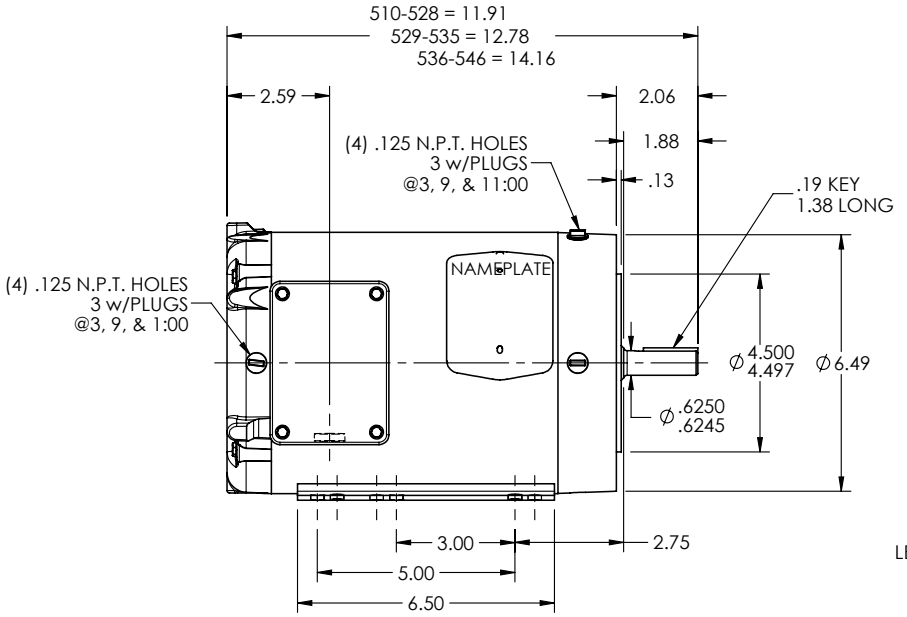

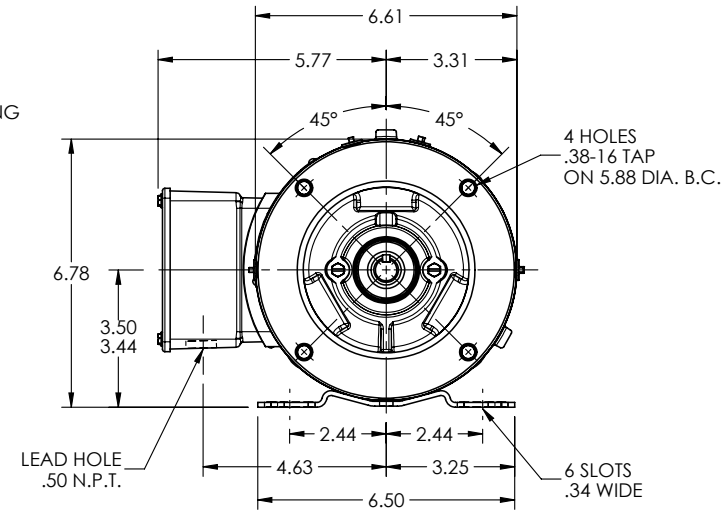

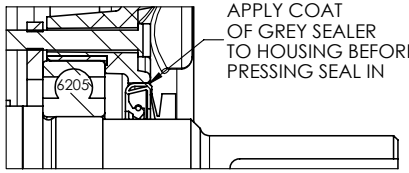


PULLEY END DETAIL


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: UPDATE MATE ERRORS IN 3D MODEL				BALDOR - RELIANCE®
REV: A	VERSION: 01	REVISED: 08:47:50 04/21/2022	TDR: 000001188385	
35LY-000-259	MODEL NO. 35LY-000-259		REF: -	STD HORZ 56HC TENV 35M WD
	BY: USBUFRA			

35LY-000-259

CD0005

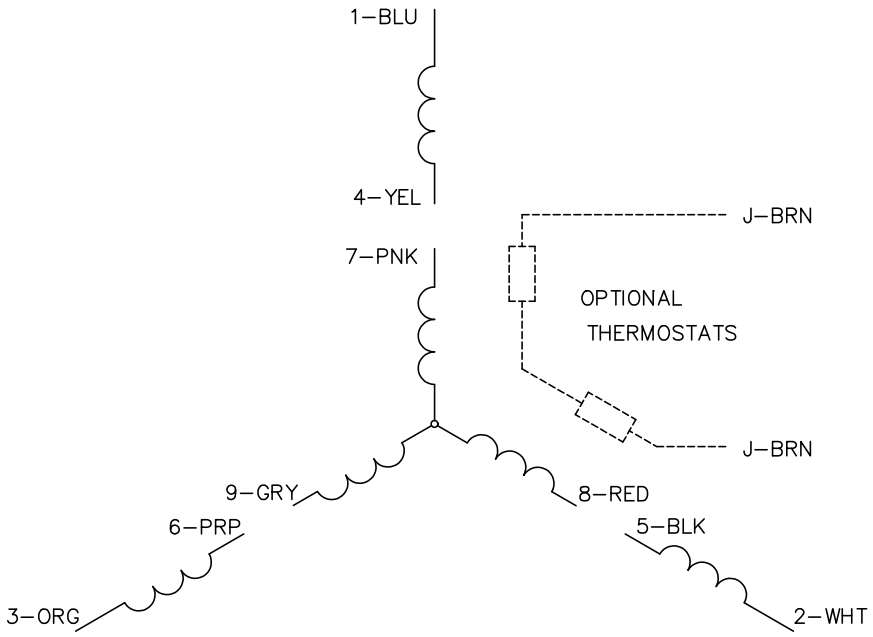

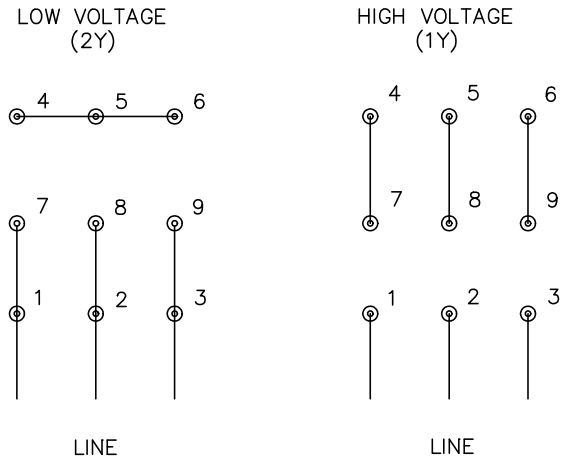

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS