

ABB BALDOR RELIANCE III

Customer information packet

CJL1205A

.33HP, 3450RPM, 1PH, 60HZ, 56J, 3416L, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56J
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.330 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.100 A @ 230.0 V 6.200 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	58.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Terminal Panel
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	3.1 a

Part Detail

Revision	AA
Type	AC
Mech. spec.	34F040
Base	
Status	PRD/A
Elec. spec.	34WG2534
Layout	34LYF040
Eff. date	09-03-2025
CD Diagram	CD0307
Poles	02
Leads	5#18,1#16 #1TH
Proprietary	False
Created date	01-01-0001

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Terminal Panel Or Lead Hole
Motor Lead Quantity/Wire Size	5 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3416L
Mounting Arrangement	F1
Number of Poles	2
Overall Length	11.91 IN
Power Factor	61
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Ext Thread
Rodent Screen	None
Service Factor	1.75
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Fixed Opposite Standard
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	SB

Nameplate

NP1257L												
CAT.NO.	CJL1205A											
SPEC.	34F40-2534											
HP	.33											
VOLTS	115/230											
AMP	6.2/3.1											
RPM	3450											
FRAME	56J			HZ		60		PH		1		
SER.F.	1.75	CODE	L	DES		N	CL		B			
NEMA-NOM-EFF	58	PF	61									
RATING	40C AMB-CONT											
CC												
DE	6203		ODE		6203							
ENCL	OPEN	SN										
	SFA 7.6/3.8											

AC Induction Motor Performance Data

Record # 6650

Typical performance - not guaranteed values

Winding: 34WG2534-R001			Type: 3416L		Enclosure: OPEN	
Nameplate Data			230 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		.33	Full Load Torque		0.5 LB-FT	
Volts		115/230	Start Configuration		direct on line	
Full Load Amps		6.2/3.1	Breakdown Torque		1.7 LB-FT	
R.P.M.		3450	Pull-up Torque		1.5 LB-FT	
Hz	60 Phase	1	Locked-rotor Torque		1.6 LB-FT	
NEMA Design Code		N	KVA Code		L	
Starting Current		14.5 A	No-load Current		2.55 A	
Service Factor (S.F.)		1.75	Line-line Res. @ 25°C		4.92 Ω A Ph 3.95 Ω B Ph	
NEMA Nom. Eff.		58	Power Factor		61	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		31°C	
S.F. Amps		7.6/3.8	Temp. Rise @ S.F. Load		43°C	

Load Characteristics 230 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	39	48	56	63	69	73	81
Efficiency	26	40.6	49.5	55.3	59.1	61.6	66.7
Speed	3561	3544	3525	3505	3484	3461	3442
Line amperes	2.6	2.75	2.9	3.05	3.3	3.55	3.8


ABB Motors and Mechanical Inc.


WINDING # 34WG2534

Typical performance - not guaranteed values.


0.33 HP 1 PH 60 HZ 3450 RPM 230 V 3416L

TORQUES (LB-FT): PO=1.7 PU=1.5 LR=1.6 LRA=14.5

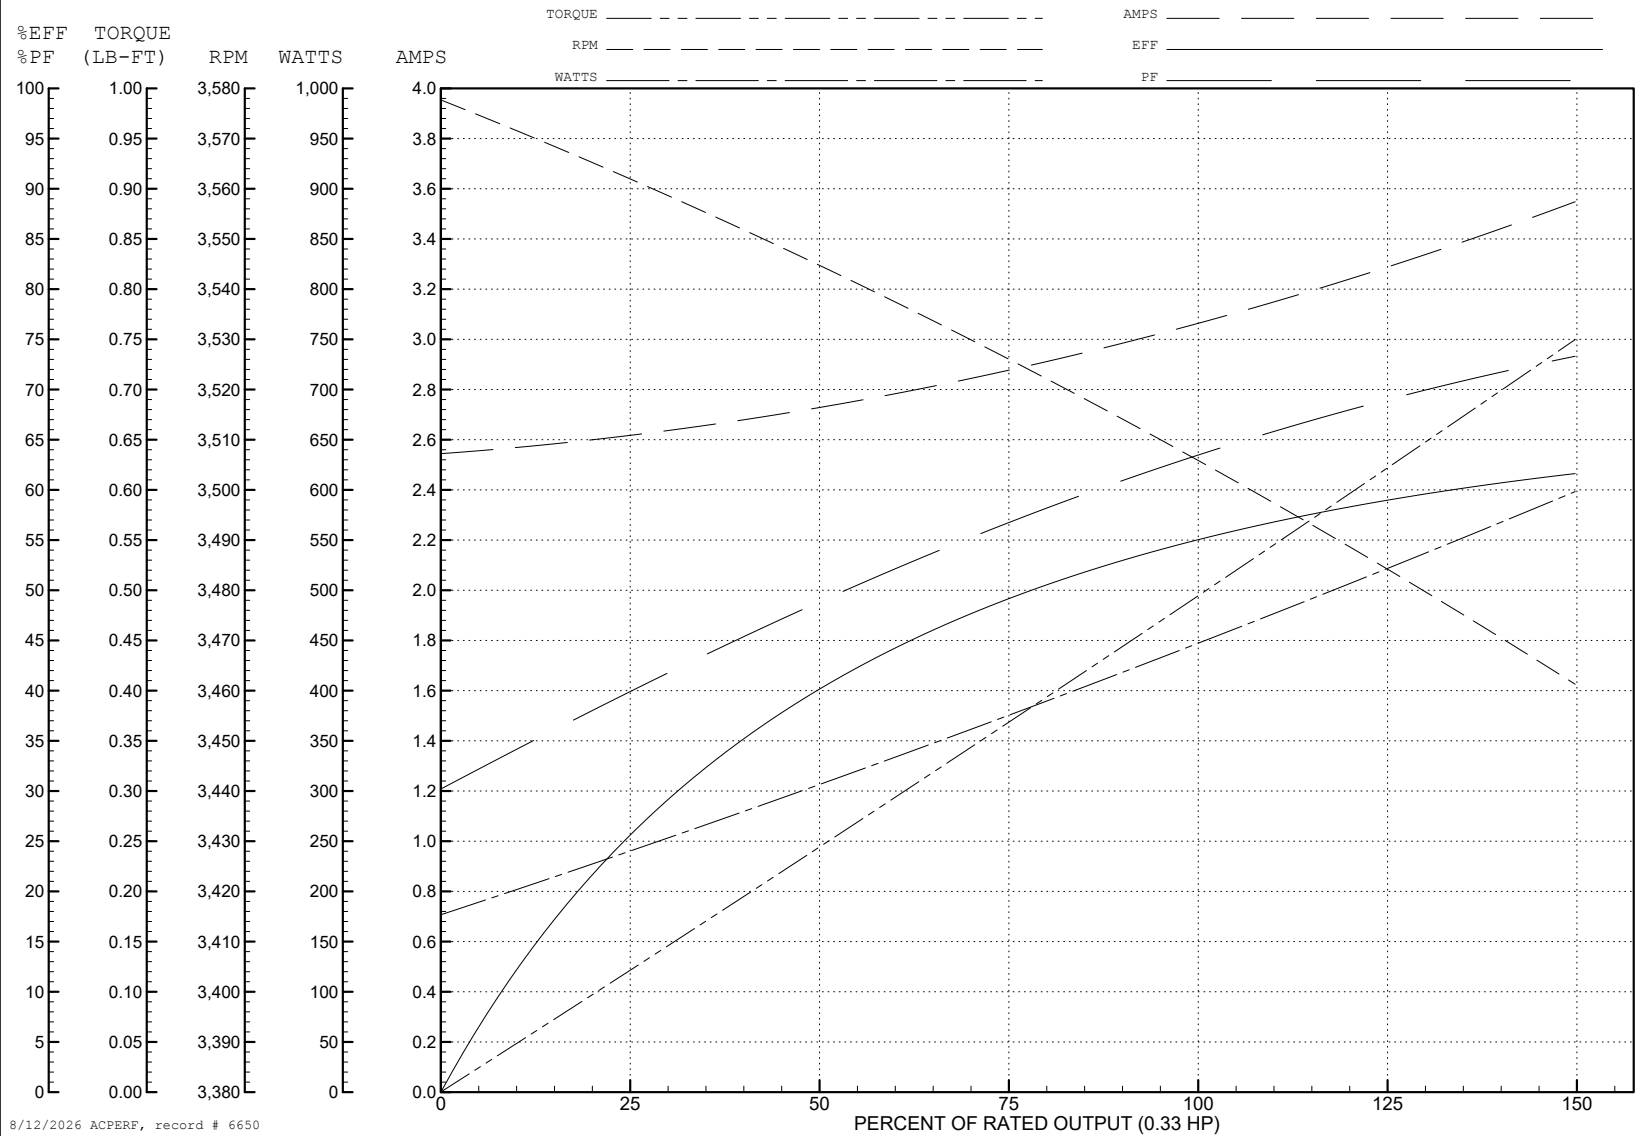

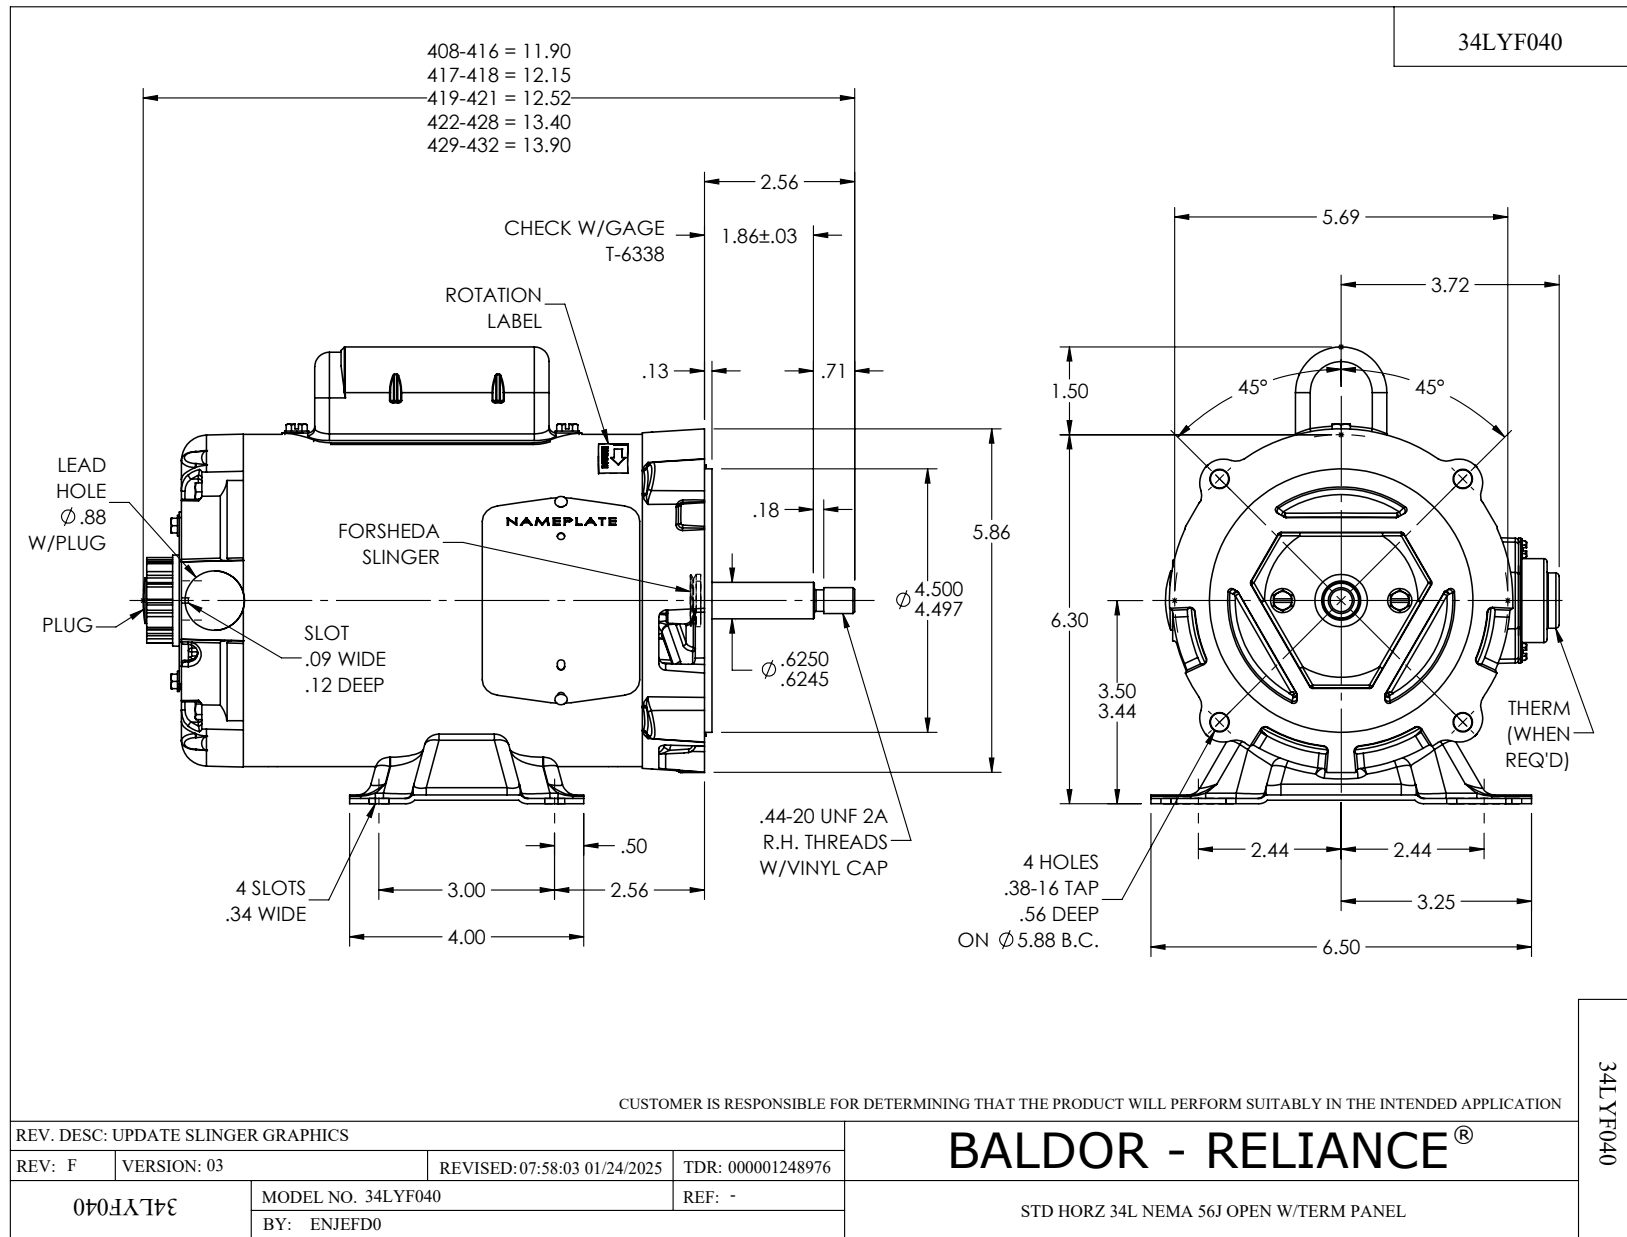

CD0307

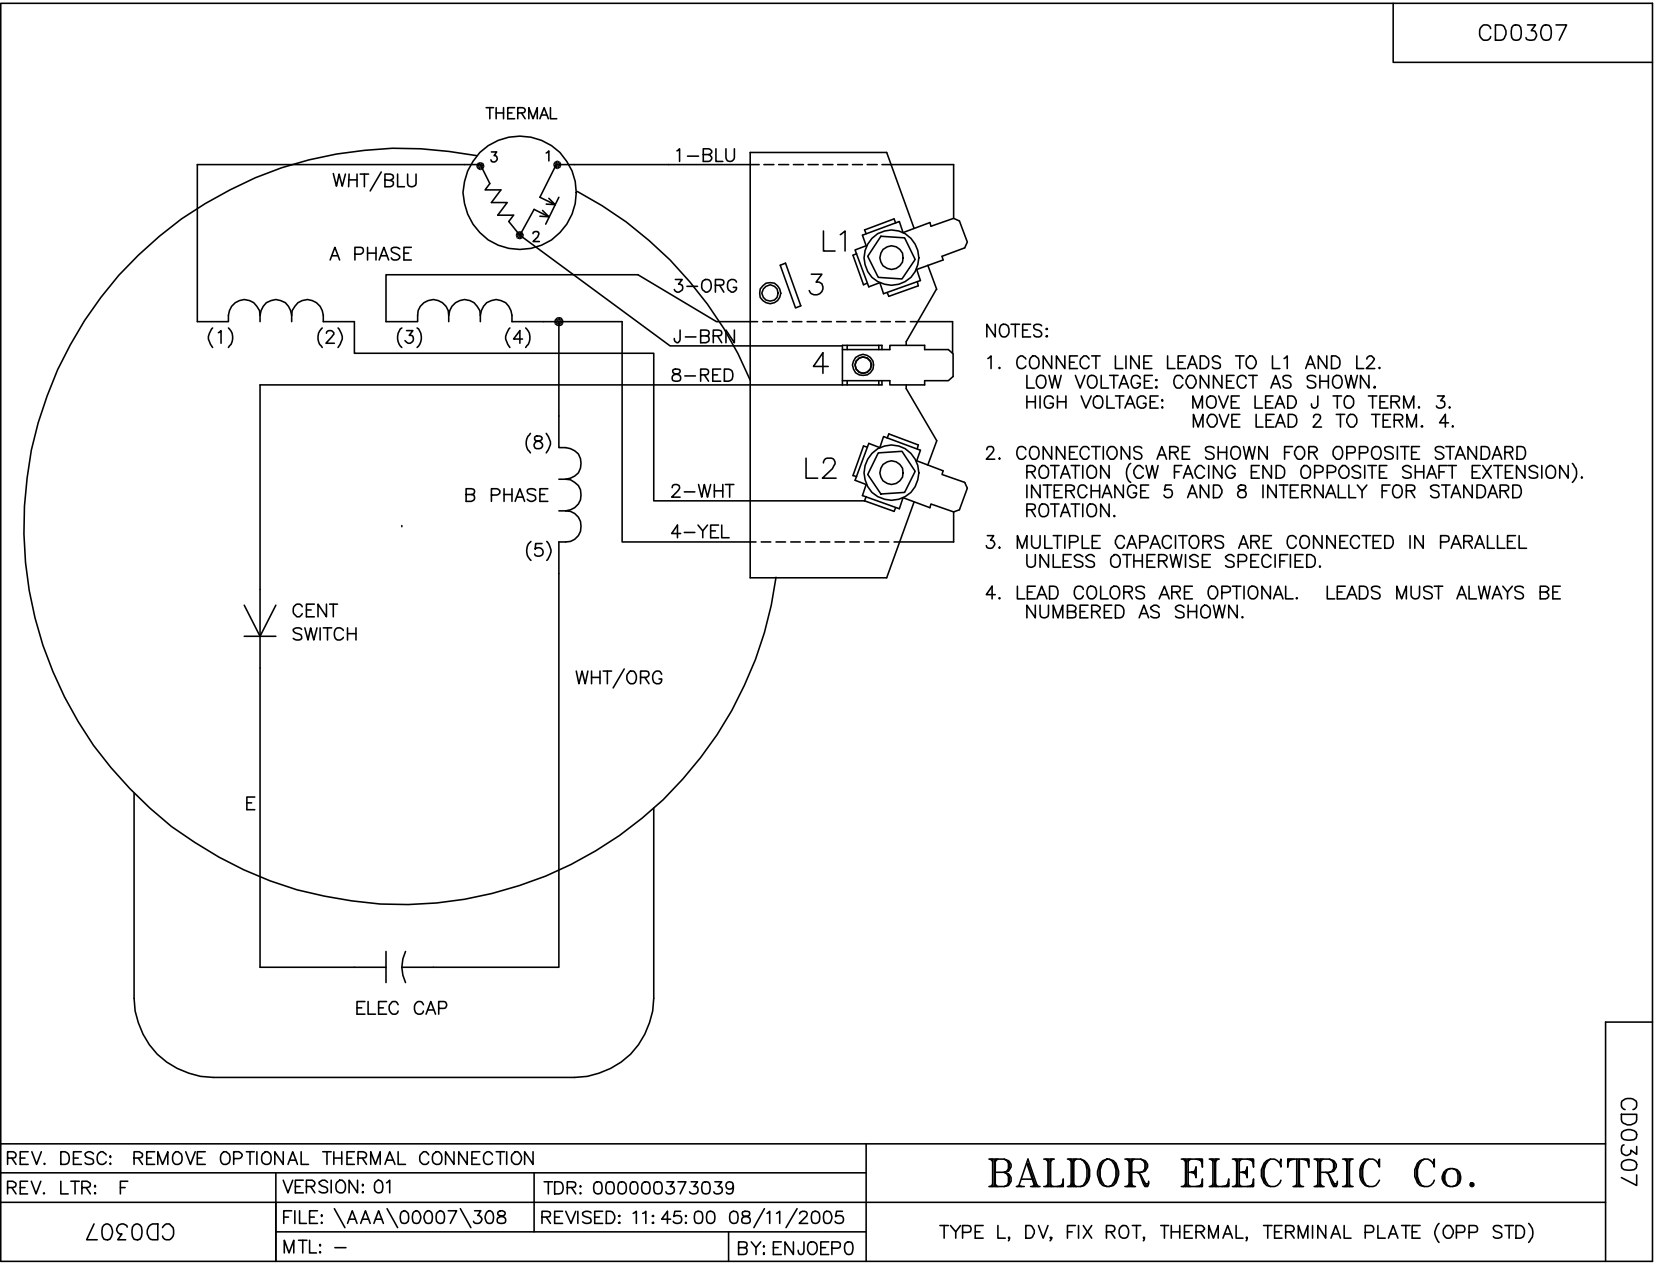

CD0307

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION		
REV. LTR: F	VERSION: 01	TDR: 000000373039
CD0307	FILE: \AAA\00007\308	REVISED: 11:45:00 08/11/2005
	MTL: -	BY: ENJOEP0

BALDOR ELECTRIC Co.

TYPE L, DV, FIX ROT, THERMAL, TERMINAL PLATE (OPP STD)