

ABB BALDOR RELIANCE III

Customer information packet

CJM3111

.75HP, 3450RPM, 3PH, 60HZ, 56J, 3416M, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56J
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	208.0 V @ 60 HZ 230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.000 A @ 208.0 V 3.200 A @ 208.0 V 3.000 A @ 230.0 V 1.500 A @ 460.0 V
Design Code	B
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	74.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Drip Cover Mounting

Part Detail

Revision	Z
Type	AC
Mech. spec.	34F029
Base	
Status	PRD/A
Elec. spec.	34WG2719
Layout	34LYF029
Eff. date	12-31-2024
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	01-01-0001

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3416M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	11.72 IN
Power Factor	66
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Ext Thread
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.50
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Vibration Sensor Indicator

No Vibration Sensor

Nameplate

NP1256L											
CAT.NO.	CJM3111										
SPEC.	34F29-2719										
HP	.75										
VOLTS	208-230/460										
AMP	3.2-3/1.5										
RPM	3450										
FRAME	56J		HZ	60			PH	3			
SER.F.	1.50		CODE	M	DES	B	CLASS	B			
NEMA-NOM-EFF	74		PF	66							
RATING	40C AMB-CONT										
CC											
DE	6203		ODE	6203							
ENCL	OPEN		SN								
	SFA 4-3.8/1.9										

AC Induction Motor Performance Data

Record # 6656

Typical performance - not guaranteed values

Winding: 34WG2719-R001			Type: 3416M		Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		.75	Full Load Torque		1.1 LB-FT	
Volts		208-230/460	Start Configuration		direct on line	
Full Load Amps		3.2-3/1.5	Breakdown Torque		6.2 LB-FT	
R.P.M.		3450	Pull-up Torque		5.2 LB-FT	
Hz	60 Phase	3	Locked-rotor Torque		5.4 LB-FT	
NEMA Design Code		B KVA Code	Starting Current		11.4 A	
Service Factor (S.F.)		1.5	No-load Current		1.3 A	
NEMA Nom. Eff.		74 Power Factor	Line-line Res. @ 25°C		16.4 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		55°C	
S.F. Amps		4-3.8/1.9	Temp. Rise @ S.F. Load		78°C	

Load Characteristics 460 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	30	43	55	63	70	74	0
Efficiency	47.6	62.6	69.8	73	74.4	74.8	0
Speed	3569	3544	3518	3492	3463	3433	0
Line amperes	1.3	1.3	1.4	1.5	1.7	1.9	1.9


ABB Motors and Mechanical Inc.

WINDING # 34WG2719


Typical performance - not guaranteed values.

0.75 HP 3 PH 60 HZ 3450 RPM 460 V 3416M

TORQUES (LB-FT) : PO=6.2 PU=5.2 LR=5.4 LRA=11.4

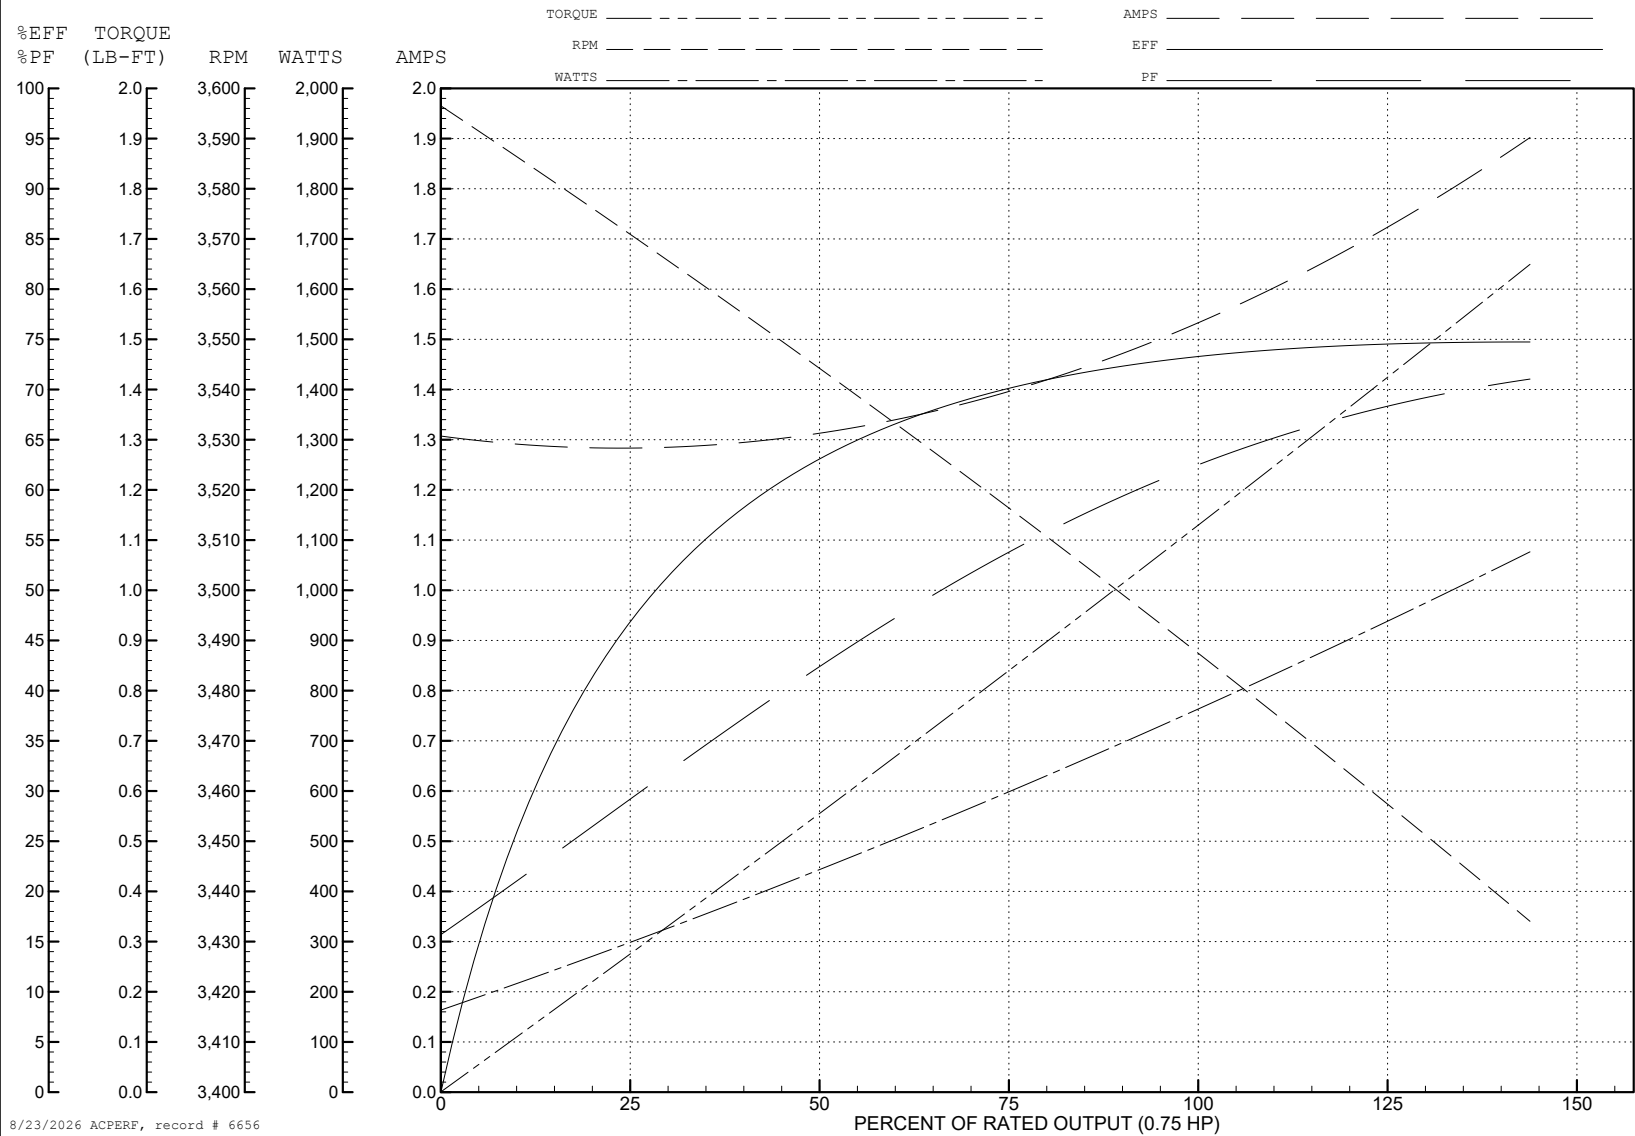

34LYF029

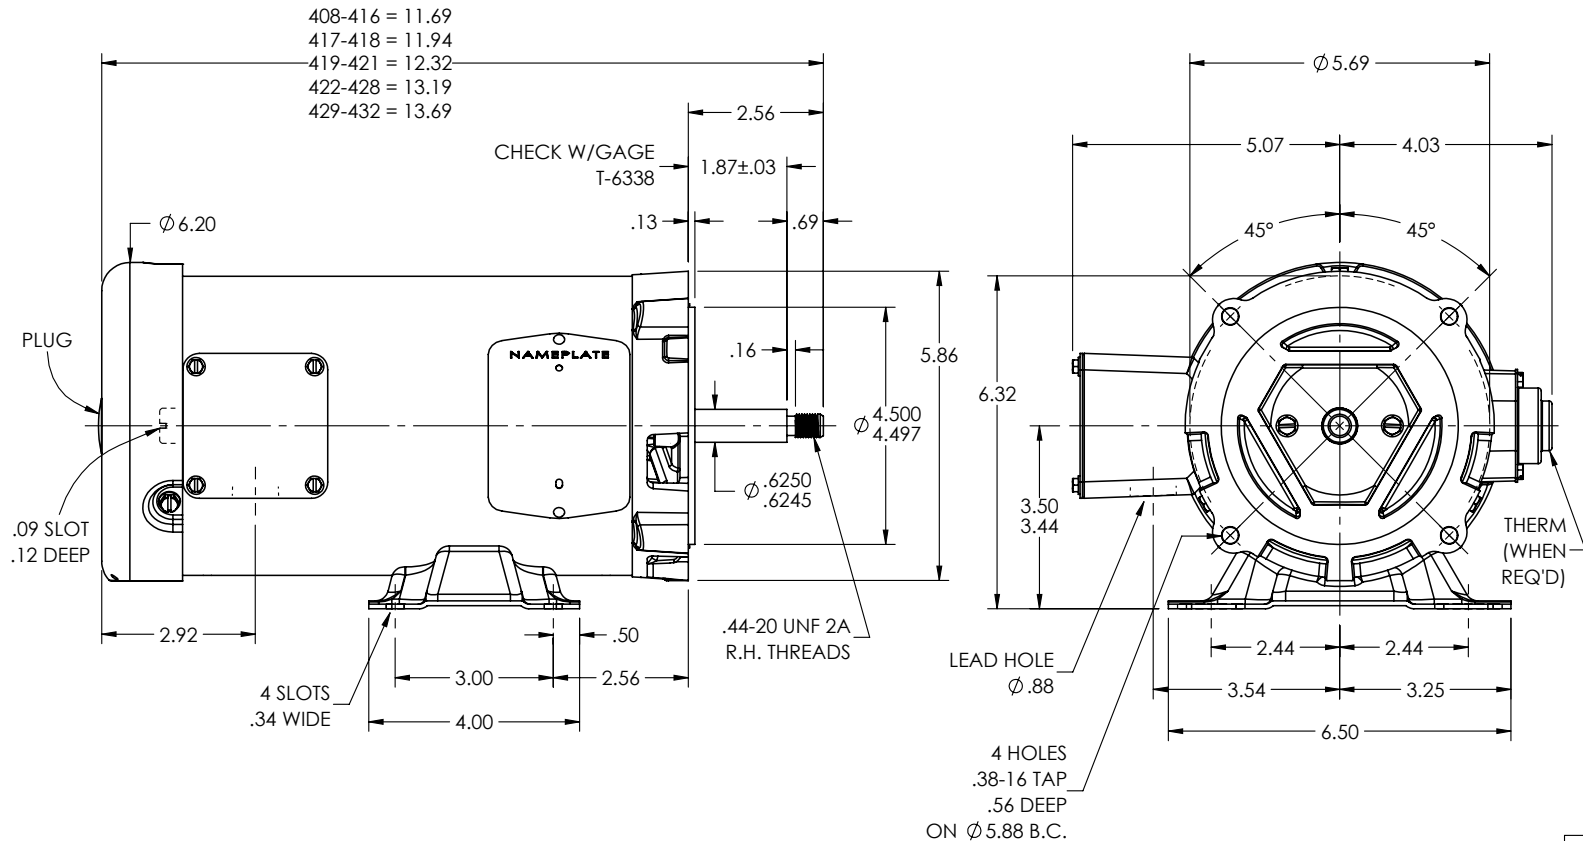

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CLEAN UP DIMENSIONING

REV: N

VERSION: 04

REVISED: 01:53:09 08/29/2025

TDR: 000001262510

34LYF029

MODEL NO. 34LYF029

BY: ENJEFD0

REF: -

BALDOR - RELIANCE®

STD HOR 56J OPEN 34M W/DRIP CVR

34LYF029

