

ABB BALDOR RELIANCE III

Customer information packet

CJM3120

1.5HP, 3450RPM, 3PH, 60HZ, 56J, 3424M, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56J
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.700 A @ 208.0 V 4.000 A @ 230.0 V 2.000 A @ 460.0 V
Design Code	B
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	81.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Drip Cover Mounting
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	U
Type	AC
Mech. spec.	34F029
Base	
Status	PRD/A
Elec. spec.	34WGX480
Layout	34LYF029
Eff. date	12-31-2024
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	01-01-0001

High Voltage Full Load Amps	2.0 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3424M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	13.22 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Ext Thread
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Nameplate

NP1256L											
CAT.NO.	CJM3120										
SPEC.	34F029X480G1										
HP	1.5										
VOLTS	230/460										
AMP	4/2										
RPM	3450										
FRAME	56J			HZ	60				PH	3	
SER.F.	1.30		CODE	L	DES	B		CLASS		B	
NEMA-NOM-EFF	81.5		PF	89							
RATING	40C AMB-CONT										
CC											
DE	6203			ODE	6203						
ENCL	OPEN		SN								
	SFA 4.4/2.2										

AC Induction Motor Performance Data

Record # 7395

Typical performance - not guaranteed values

Winding: 34WGX480-R001			Type: 3424M		Enclosure: OPEN			
Nameplate Data			460 V, 60 Hz: High Voltage Connection					
Rated Output (HP)		1.5	Full Load Torque		2.3 LB-FT			
Volts		230/460	Start Configuration		direct on line			
Full Load Amps		4/2	Breakdown Torque		10.1 LB-FT			
R.P.M.		3450	Pull-up Torque		7.7 LB-FT			
Hz	60 Phase	3	Locked-rotor Torque		10 LB-FT			
NEMA Design Code		B	KVA Code	L	Starting Current		17 A	
Service Factor (S.F.)		1.15	No-load Current		1 A			
NEMA Nom. Eff.		81.5	Power Factor		89	Line-line Res. @ 25°C		0.922 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		35°C	
S.F. Amps		4.4/2.2	Temp. Rise @ S.F. Load		40°C			

Load Characteristics 460 V, 60 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	50	71	83	89	92	94	0
Efficiency	68	78.4	81.2	81.6	80.9	79.4	0
Speed	3545	3504	3460	3413	3364	3307	0
Line amperes	1.1	1.3	1.6	2	2.4	2.9	2.2


ABB Motors and Mechanical Inc.

WINDING # 34WGX480


Typical performance - not guaranteed values.

1.5 HP 3 PH 60 HZ 3450 RPM 460 V 3424M

TORQUES (LB-FT): PO=10.1 PU=7.7 LR=10 LRA=17

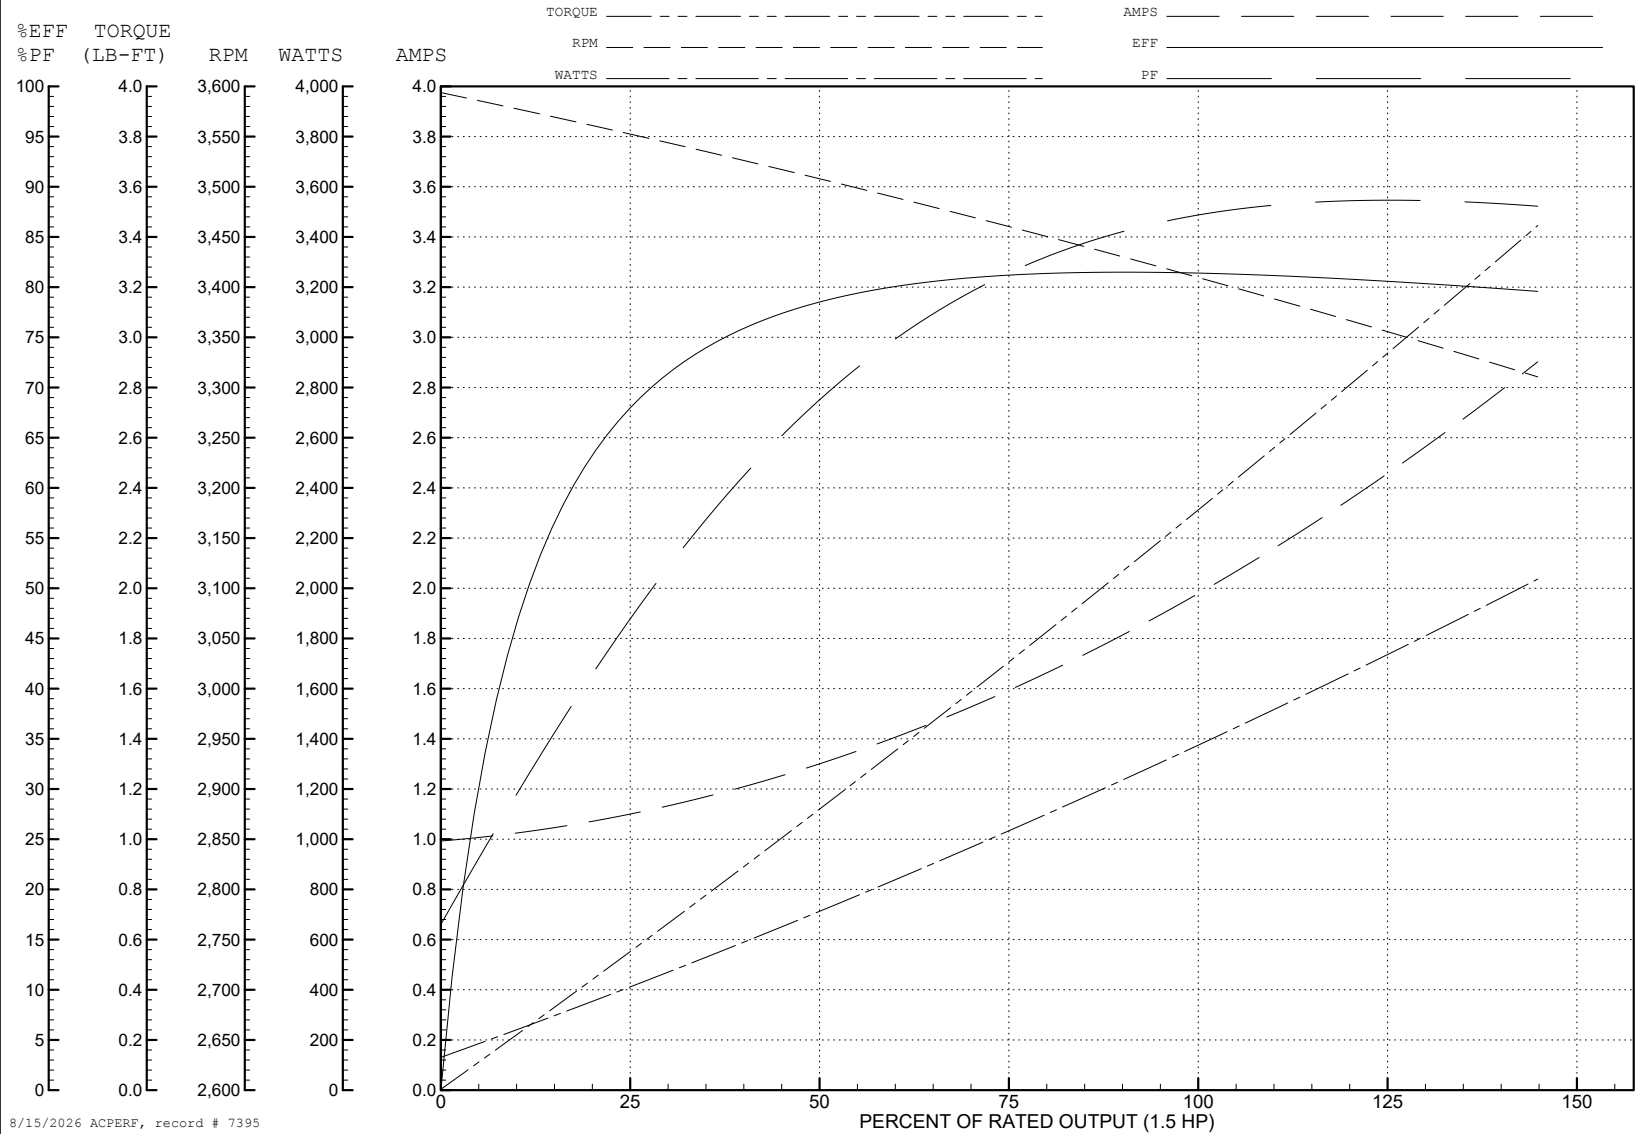

34LYF029

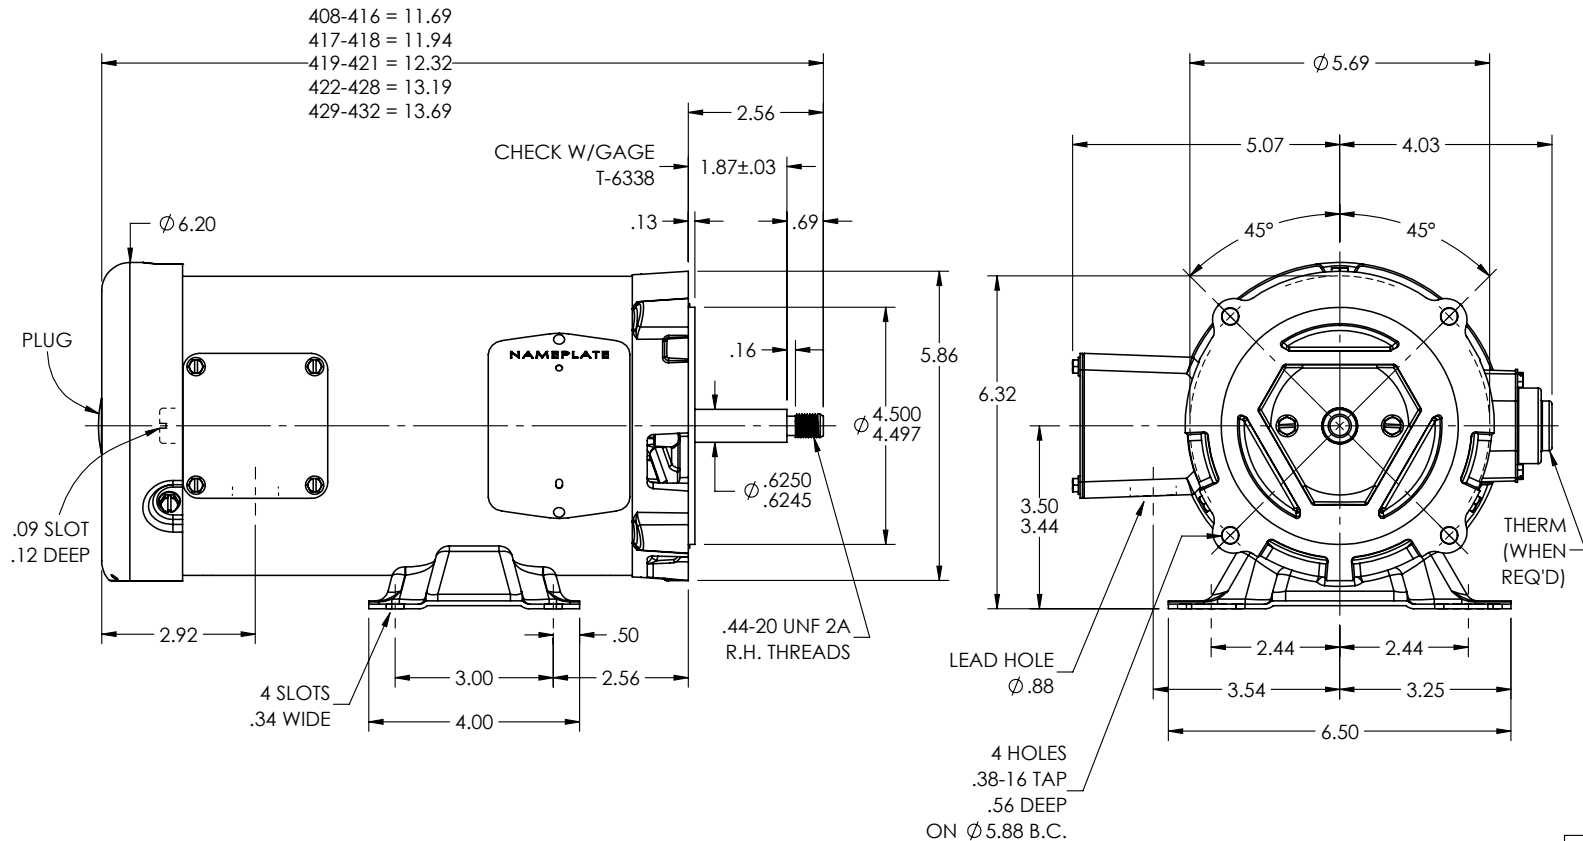

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CLEAN UP DIMENSIONING

REV: N VERSION: 04 REVISED: 01:53:09 08/29/2025 TDR: 000001262510

34LYF029

MODEL NO. 34LYF029

BY: ENJEFD0

REF: -

BALDOR - RELIANCE®

STD HOR 56J OPEN 34M W/DRIP CVR

34LYF029



Page 8 of 8