Customer information packet

CJM3542

.75HP, 1725RPM, 3PH, 60HZ, 56J, 3420M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/14/2026 12:46:00 PM

Specifications

Enclosure	TEFC
Frame	56J
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	208.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CSA
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.600 A @ 208.0 V
	3.200 A @ 208.0 V
	3.000 A @ 230.0 V
	1.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	75.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part Detail

Revision	X
Type	AC
Mech. spec.	34K039
Base	
Status	PRD/A
Elec. spec.	34WG0883
Layout	34LYK039
Eff. date	10-28-2024
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	01-01-0001

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3420M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.84 IN
Power Factor	60
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Ext Thread
Rodent Screen	None
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Nameplate

NP1256L											
CAT.NO.	CJM3542										
SPEC.	34K39-883										
HP	.75										
VOLTS	208-230/460										
AMP	3.2-3/1.5										
RPM	1725										
FRAME	56J	**HZ**	60			**PH**	3				
SER.F.	1.25	**CODE**	K	**DES**	B	**CLASS**	B				
NEMA-NOM-EFF	75.5	**PF**	60								
RATING	40C AMB-CONT										
CC											
DE	6203	**ODE**	6203								
ENCL	TEFC	**SN**									
	SFA 3.6-3.4/1.7										

Accessories

Part number	Description	Multiplier
34-171	C FACE KIT	A8

AC Induction Motor Performance Data
Record # 6605
Typical performance - not guaranteed values

Winding: 34WG0883-R001	**Type:** 3420M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			.75	**Full Load Torque**	2.25 LB-FT
Volts			208-230/460	**Start Configuration**	direct on line
Full Load Amps			3.2-3/1.5	**Breakdown Torque**	10 LB-FT
R.P.M.			1725	**Pull-up Torque**	8.5 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	8.8 LB-FT
NEMA Design Code	B	**KVA Code**	K	**Starting Current**	10 A
Service Factor (S.F.)			1.25	**No-load Current**	1.2 A
NEMA Nom. Eff.	75.5	**Power Factor**	60	**Line-line Res. @ 25ºC**	18.3 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	74°C
S.F. Amps			3.6-3.4/1.7	**Temp. Rise @ S.F. Load**	87°C
				Locked-rotor Power Factor	57.5
				Rotor inertia	0.0476 LB-FT2

Load Characteristics 460 V, 60 Hz, 0.75 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	27	42	54	61	70	75	71
Efficiency	56.1	70	74.8	76.2	76	75.3	76.1
Speed	1783	1766	1749	1731	1711	1693	1711
Line amperes	1.2	1.2	1.3	1.5	1.6	1.8	1.6


ABB Motors and Mechanical Inc.

WINDING # 34WG0883


0.75 HP 3 PH 60 HZ 1725 RPM 460 V 3420M

Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=10 PU=8.5 LR=8.8 LRA=10

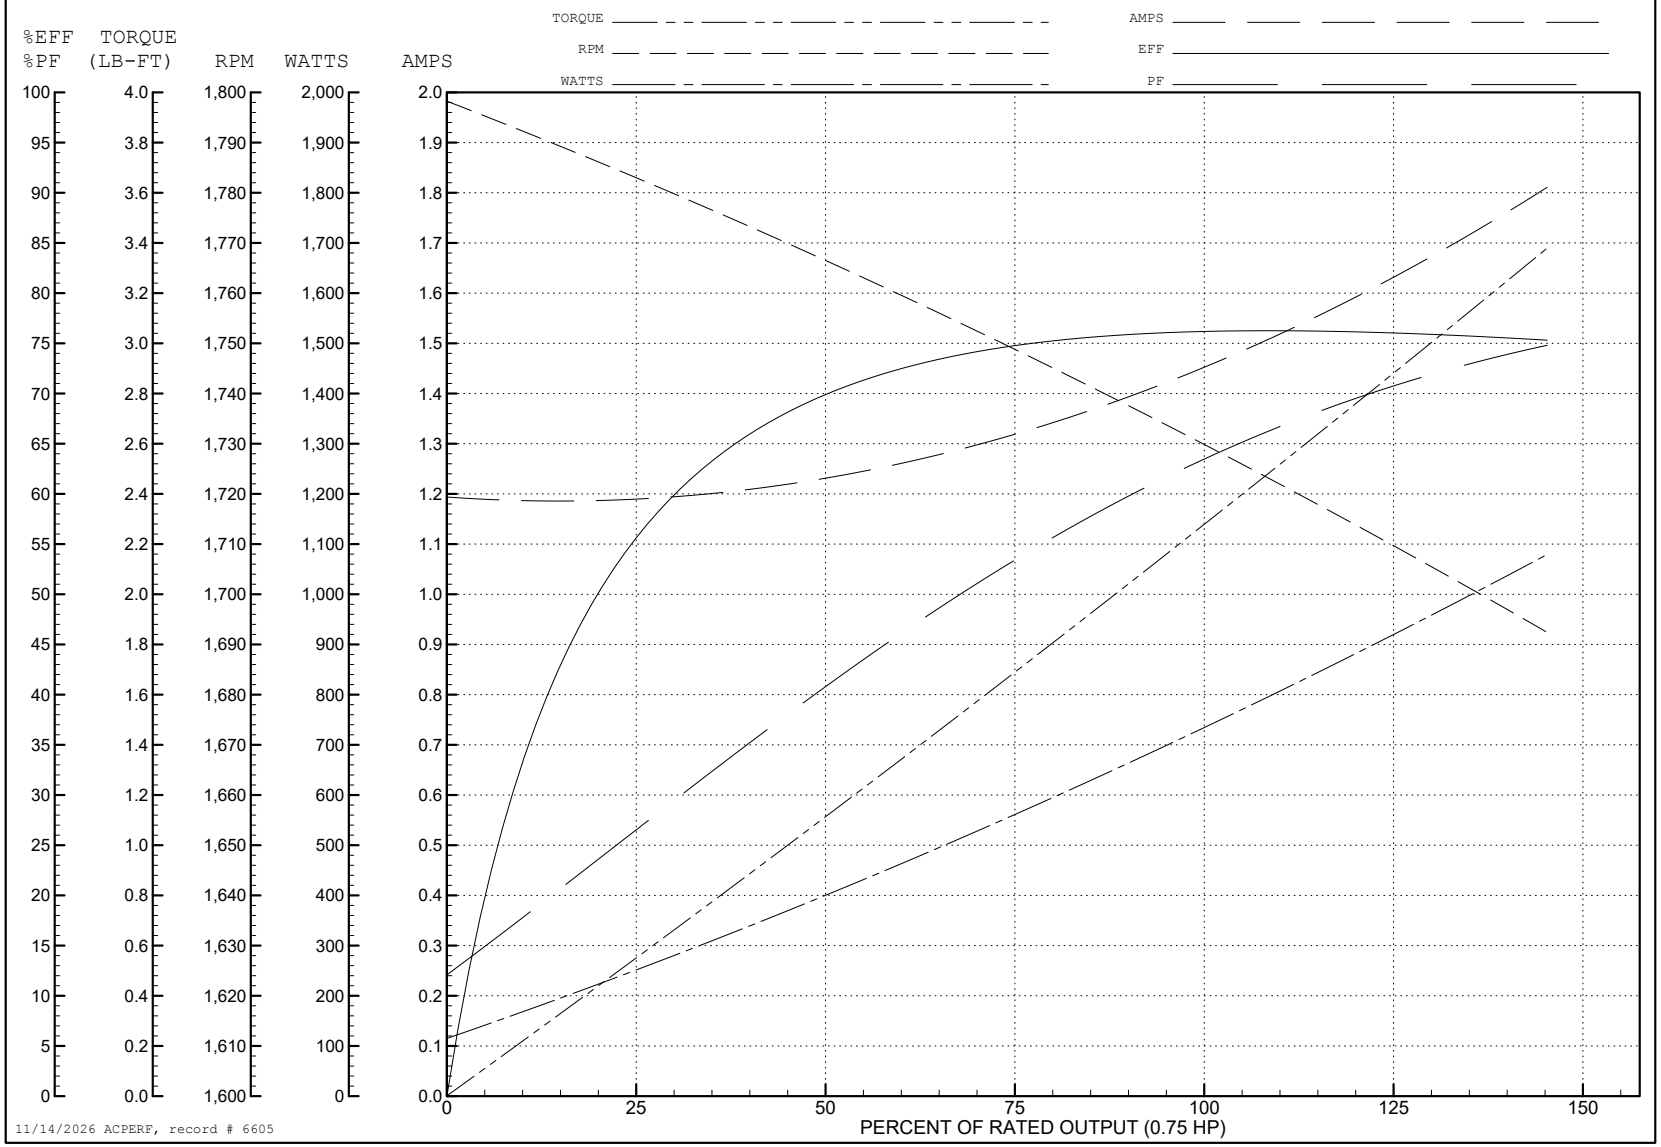

34LYK039

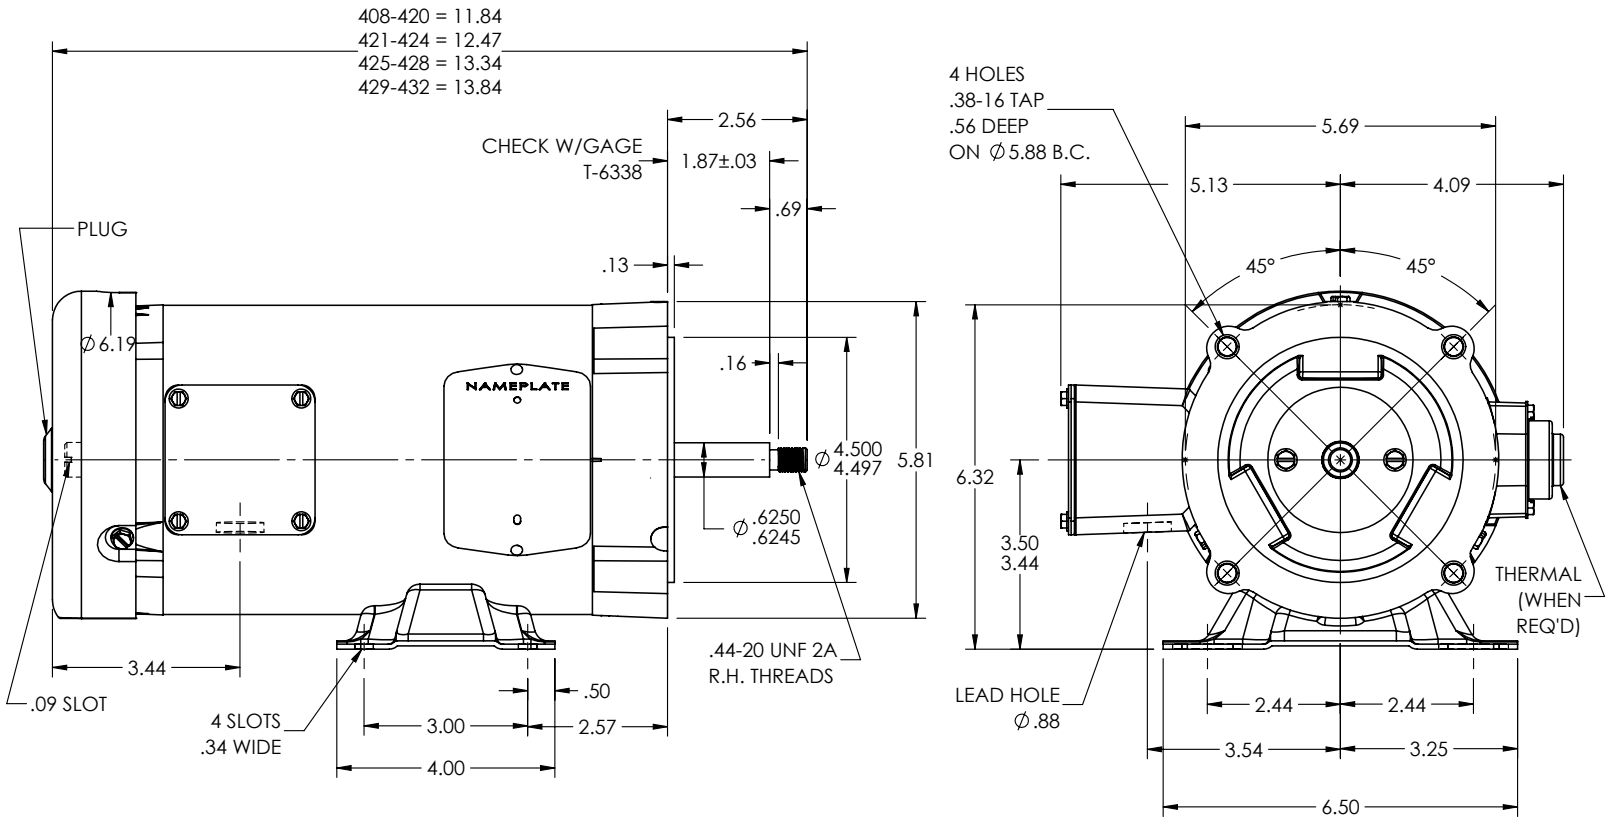

34LYK039


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION


REV. DESC: CORRECT "A" LENGTH TO 11.84 FROM 13.84			
REV: K	VERSION: 05	REVISED: 12:27:42 10/20/2023	TDR: 000001218969
34LYK039	MODEL NO. 34LYK039		REF: -
	BY: ENADAF0		

BALDOR - RELIANCE®

STD HORZ MODEL 34M NEMA 56J TEFC

CD0005

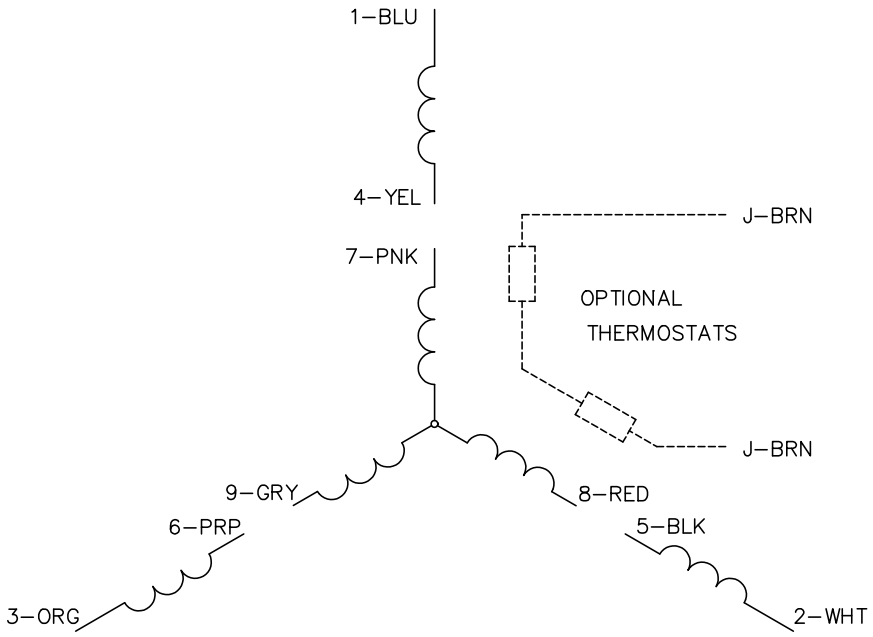

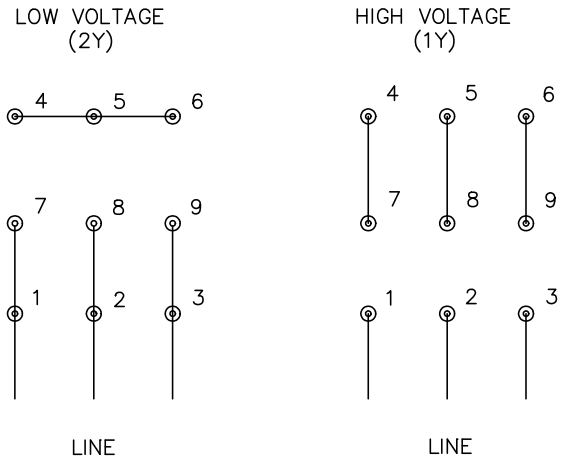

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS