

ABB BALDOR RELIANCE III

Customer information packet

CM3542-5

.75HP, 1725RPM, 3PH, 60HZ, 56C, 3420M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.200 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	75.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.2 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	K

Part Detail

Revision	T
Type	AC
Mech. spec.	34A062
Base	
Status	PRD/A
Elec. spec.	34WG0908
Layout	34LYA062
Eff. date	12-30-2024
CD Diagram	CD0006
Poles	04
Leads	3#18
Proprietary	False
Created date	01-01-0001

Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3420M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.35 IN
Power Factor	60
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	CM3542-5								
SPEC.	34A062-0908								
HP	.75								
VOLTS	575								
AMP	1.2								
RPM	1725								
FRAME	56C		HZ	60			PH	3	
SER.F.	1.25	CODE	K	DES	B	CLASS		B	
NEMA-NOM-EFF	75.5	PF	60						
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	TEFC	SN							
	SFA 1.4								

AC Induction Motor Performance Data

Record # 33219

Typical performance - not guaranteed values

Winding: 34WG0908-R001			Type: 3420M		Enclosure: TEFC			
Nameplate Data			575 V, 60 Hz: Single Voltage Motor					
Rated Output (HP)		.75	Full Load Torque		2.25 LB-FT			
Volts		575	Start Configuration		direct on line			
Full Load Amps		1.2	Breakdown Torque		10 LB-FT			
R.P.M.		1725	Pull-up Torque		8.5 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		8.8 LB-FT		
NEMA Design Code		B	KVA Code	K	Starting Current		8 A	
Service Factor (S.F.)		1.25	No-load Current		0.9 A			
NEMA Nom. Eff.		75.5	Power Factor		60	Line-line Res. @ 25°C		27.8 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		48°C	
S.F. Amps		1.4	Temp. Rise @ S.F. Load		59°C			

Load Characteristics 575 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	26	41	51	61	69	77	69
Efficiency	56.1	70	74.8	76.2	76	75.3	76
Speed	1783	1766	1749	1731	1711	1693	1711
Line amperes	1	1	1.1	1.2	1.3	1.4	1.3


ABB Motors and Mechanical Inc.


WINDING # 34WG0908

0.75 HP 3 PH 60 HZ 1725 RPM 575 V 3420M



Typical performance - not guaranteed values.

TORQUES (LB-FT) : PO=10 PU=8.5 LR=8.8 LRA=8

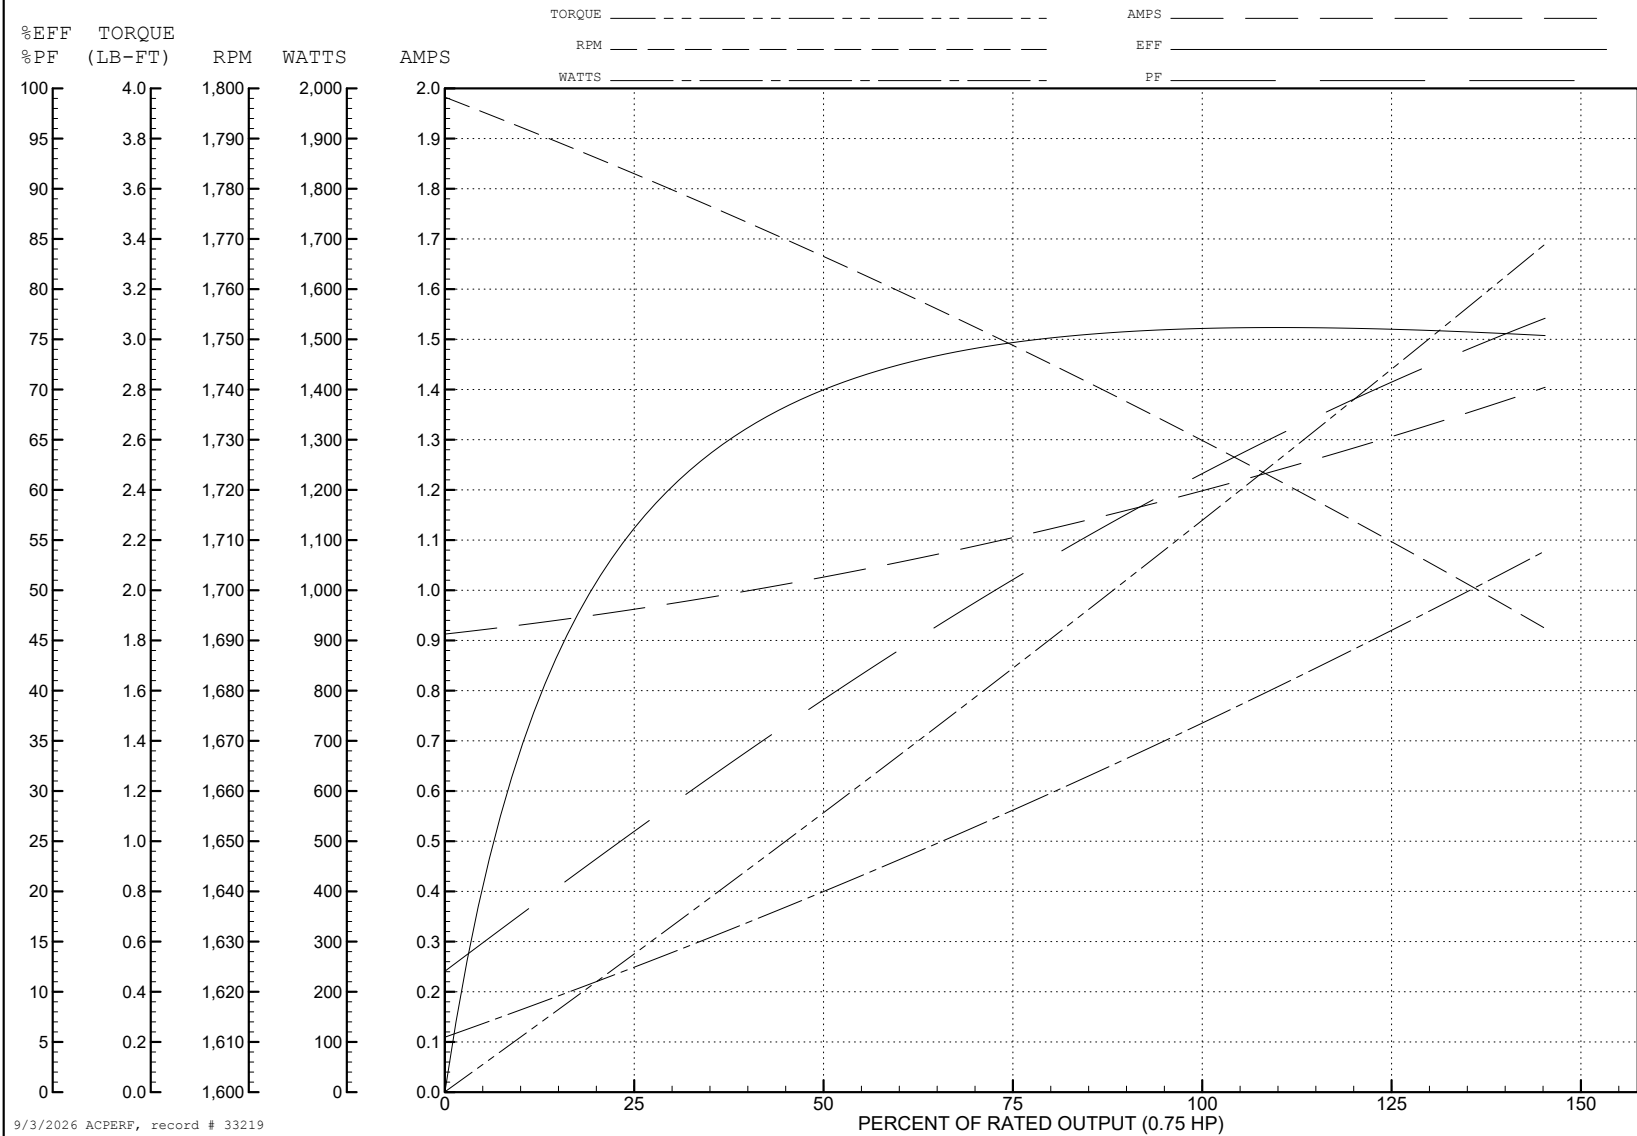



CD0006

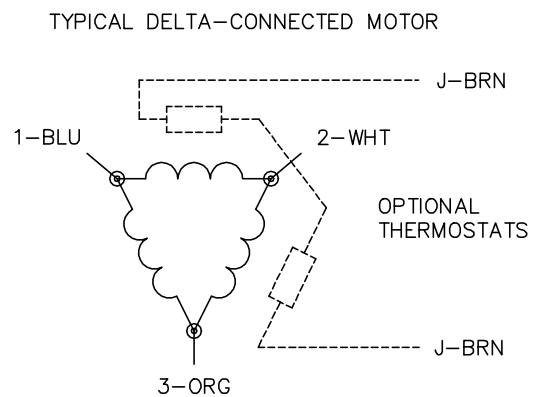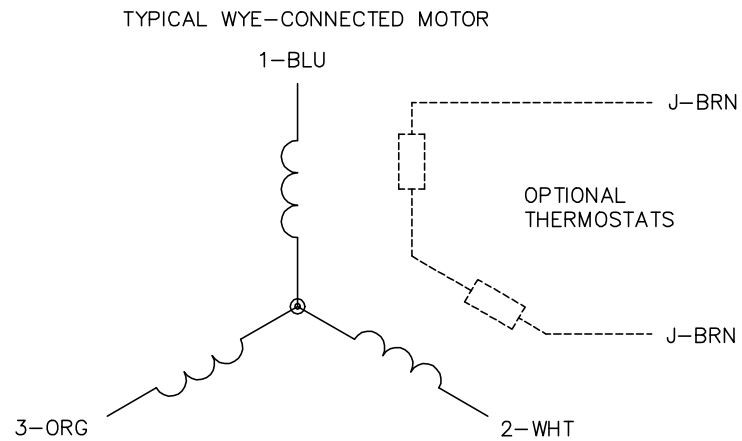
NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: -


BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1