
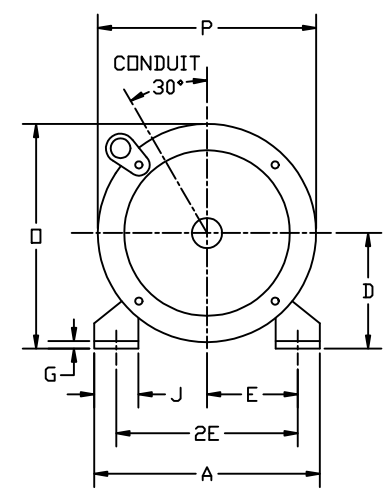
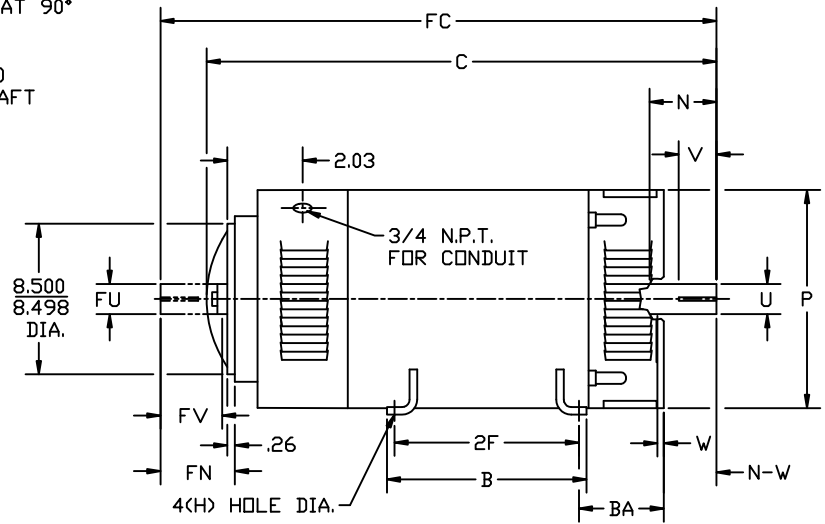


CUSTOMER NAME		MODEL NO.			MTG.		REMARKS:	
CUSTOMER P.O.		FRAME	R.P.M.	VOLTS	PHASE		INSUL	
CERTIFIED BY		H.P.	TYPE	ENCL	FREQ.		AMB.	

UNITS: INCH	SCALE: NONE	PROPORTION: NONE	PART NUMBER	875	DWG.SIZE	A
----------------	----------------	---------------------	-------------	-----	----------	---

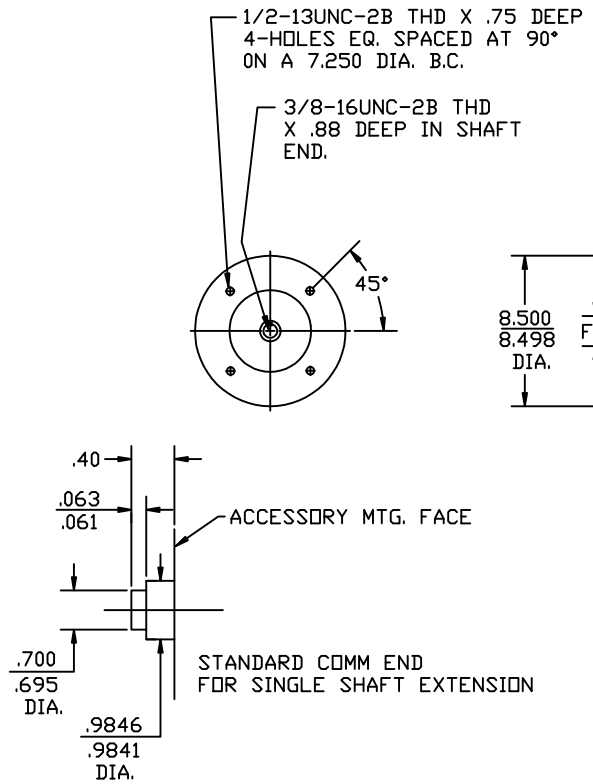

	FOOT MOUNTING						D.E. SHAFT EXTENSION					DRIVE KEY		ACC SHAFT EXTENSION			ACC KEY		FRAME								ARM APPROX. WK ² LBS.FT. ²	APPROXIMATE WEIGHT
FRAME	BA	E	2F	G	H	J	N	N-W	U	V	W	KEY-SQ.	KEY-LONG	FN	FU	FV	KEY-SQ.	KEY-LONG	A	B	C	FC	D	O	P			
L182AT	2.75	3.75	4.50	.38	.406	1.50	2.90	2.77	1.125	2.50 ³	.13	.250	1.38	2.28	.875	2.03	.188	1.38	8.81	5.75	15.81	17.37	4.50 ²	8.94	8.88	.28	84 ⁵	
L186AT	2.75	3.75	7.00	.38	.406	1.50	2.90	2.77	1.125	2.50 ³	.13	.250	1.38	2.28	.875	2.03	.188	1.38	8.81	8.25	19.31	20.87	4.50 ²	8.94	8.88	.67	159 ⁵	
1810AT	2.75	3.75	11.00	.38	.406	1.50	2.90	2.77	1.125	2.50 ³	.13	.250	1.38	2.28	.875	2.03	.188	1.38	8.81	12.25	22.21	23.78	4.50 ²	9.00	9.00	1.0	195 ⁵	

- 1) SHAFT DIAMETERS TO 1.500 TOLERANCE +.0000 -.0005
SHAFT DIAMETERS ABOVE 1.500 TOLERANCE +.0000 -.0010
SHAFT DIAMETERS TO 1.625 RUNOUT .002 T.I.R. MAX.
SHAFT DIAMETERS ABOVE 1.625 RUNOUT .003 T.I.R. MAX.
- 2) 'D' DIMENSION TOLERANCE +.000 - .030
- 3) 'V' DIMENSION IS MAX. HUB LENGTH ON SHAFT
- 4) CONDUIT BOX CAN BE ROTATED IN 90° STEPS ON ITS OWN AXIS.
- 5) TOTAL WEIGHT OF MOTOR.
- 6) ALL DIMENSIONS NOT NOTED ARE NOMINAL DIMENSIONS CONSULT FACTORY FOR TOLERANCES.

FOR F1 OR F2 CONDUIT BOX
LOCATION SEE SALES ORDER

DESIGNER CSL 7-19-91	BALDOR
ENGINEER RFL 7-19-91	
ENGINEER DAG 7-19-91	
MANUF. RWT 7-19-91	
TITLE: DIMENSION SHEET DPFG, STD AT	
PART NUMBER 875	
DWG.SIZE A	
REV. A	

A	19032	REDRAWN	CSL	7-19-1991
REV.	ECO.	DESCRIPTION	BY	DATE