ABB BALDOR RELIANCE

# Customer information packet

## D2510R

10HP, 1750RPM, DC, 2113ATY, TEFC,

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
9/9/2026 2:31:44 PM

## Specifications

| | |
|---|---|
| **Enclosure** | TEFC |
| **Frame** | MC2113ATZ |
| **Frame Material** | Exposed Laminations |
| **Output Power** | 10.000 HP |
| **Agency Approvals** | CCSA US |
| **Ambient Temperature** | 40 °C |
| **Bearing Grease Type** | Polyrex EM (-20F +300F) |
| **Drip Cover** | No Drip Cover |
| **Feedback Device** | NO FEEDBACK |
| **Field Winding Type** | STAB SHUNT |
| **Frame Prefix** | MC |
| **Heater Indicator** | No Heater |
| **Lifting Lugs** | Standard Lifting Lugs |
| **Motor Standards** | NEMA |
| **Mounting Arrangement** | F1 |
| **Overall Length** | 33.44 IN |
| **Shaft Extension Location** | Pulley End |
| **Shaft Ground Indicator** | No Shaft Grounding |
| **Shaft Slinger Indicator** | No Slinger |

## Part Detail

| | |
|---|---|
| **Revision** | - |
| **Type** | DC |
| **Mech. spec.** | |
| **Base** | |
| **Status** | PRD/A |
| **Elec. spec.** | G6241C A |
| **Layout** | 609951-013 |
| **Eff. date** | 04-13-2015 |
| **CD Diagram** | 406770-001 |
| **Poles** | 00 |
| **Leads** | |
| **Proprietary** | False |
| **Created date** | 04-10-2015 |

**Nameplate**

| 000613006HP | | | | | | | |
|---|---|---|---|---|---|---|---|
| **CAT.NO.** | | **SPEC NO.** | T21S0303 | | | | |
| **FR** | MC 2113ATZ | **HP** | 10 | **DUTY** | CONT | | |
| **ENCL.** | TEFC | **RPM** | 1750/ 2300 | **S.F.** | 1.0 | | |
| **ENCL MOD** | | **VOLTS** | 240 | **INSUL** | F | | |
| **MAX SAFE SPEED** | 4500 | **AMPS** | 35.50 | **AMB.** | 40 | | |
| | **FIELD DATA** | **SER.NO.** | | | | | |
| **WINDING** | STAB SHUNT | **POWER CODE** | C | | | | |
| **VOLTS** | 150 | **D.E. BRG.** | 50BC03J30X | | | | |
| **MAX AMPS @ 25 C** | 3.13 | **O.D.E. BRG.** | 45BC02J30X | | | | |
| **HOT AMPS** | 2.19/ 1.58 | **MIN. AMB.** | 0 | **TYPE** | TR | | |
| | BRUSH:419904051AB | | | | | | |

609951-013

# INDUSTRIAL DIRECT CURRENT MOTORS AND GENERATORS – RPM III

ENCLOSURE: TOTALLY ENCLOSED
MOUNTING:FOOT
METHOD OF DRIVE:COUPLED OR BELTED

COOLING: FAN COOLED
ACCESSORIES: PROVISION FOR TACHOMETER MOUNTING ONLY WHEN SPECIFIED

## FRAMES SC2113ATZ THRU LC2812ATZ

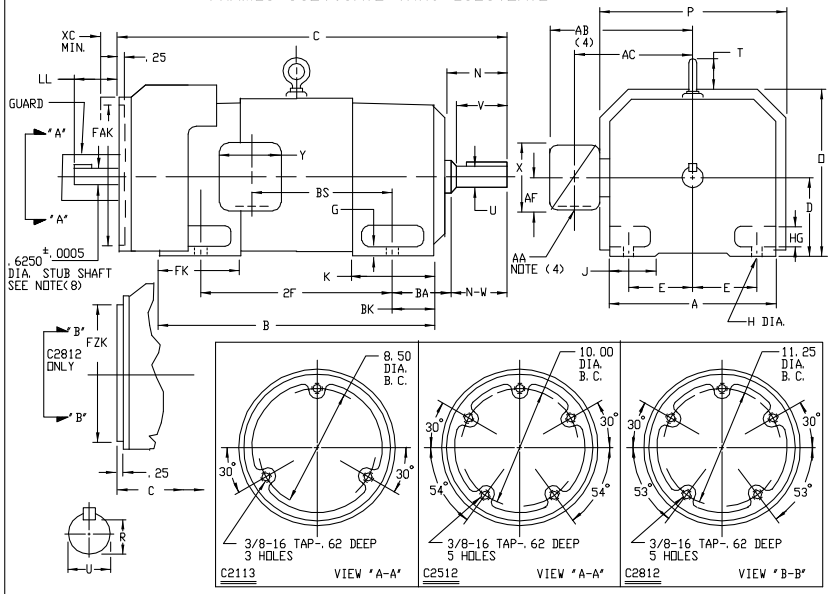


DIMENSIONS ARE IN INCHES

| FRAME | A | D(1) | E | G | H | HG | J | O | P | T | BA | K | FK | BK | FAK(6) | FZK(7) | XC(5) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SC2113ATZ-LC2113ATZ | 10.25 | 5.25 | 4.25 | .44 | .44 | 1.38 | 1.75 | 11.62 | 12.75 | 1.38 | 3.50 | 5.19 | 6.81 | 2.38 | 9.750 | N/A | 1.25 |
| SC2512ATZ-LC2512ATZ | 12.31 | 6.25 | 5.00 | .50 | .56 | 1.62 | 2.00 | 13.62 | 14.75 | 1.94 | 4.25 | 6.06 | 8.00 | 3.00 | 11.250 | N/A | 1.25 |
| MC2812ATZ-LC2812ATZ | 13.78 | 7.00 | 5.50 | .62 | .56 | 1.88 | 2.75 | 15.06 | 16.12 | 2.31 | 4.75 | 6.75 | 9.19 | 3.50 | N/A | 12.500 | 1.25 |

| FRAME | C | B | BS | 2F | DRIVE END SHAFT AND KEY | | | | | | | WT. LBS. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | N | N-W | U(2) | V | R(3) | SQ. | LGTH. | |
| SC2113ATZ | 32.19 | 22.50 | 11.38 | 18.00 | 4.00 | 3.75 | 1.875 | 3.50 | 1.591 | .500 | 2.50 | 355 |
| MC2113ATZ | 33.44 | 23.75 | 12.62 | 18.00 | 4.00 | 3.75 | 1.875 | 3.50 | 1.591 | .500 | 2.50 | 380 |
| LC2113ATZ | 35.06 | 25.38 | 14.25 | 18.00 | 4.00 | 3.75 | 1.875 | 3.50 | 1.591 | .500 | 2.50 | 410 |
| SC2512ATZ | 35.94 | 25.06 | 12.06 | 20.00 | 4.50 | 4.25 | 2.125 | 4.00 | 1.845 | .500 | 3.00 | 555 |
| MC2512ATZ | 37.44 | 26.56 | 13.56 | 20.00 | 4.50 | 4.25 | 2.125 | 4.00 | 1.845 | .500 | 3.00 | 590 |
| LC2512ATZ | 38.94 | 28.06 | 15.06 | 20.00 | 4.50 | 4.25 | 2.125 | 4.00 | 1.845 | .500 | 3.00 | 630 |
| MC2812ATZ | 41.62 | 29.94 | 14.25 | 22.00 | 5.00 | 4.75 | 2.375 | 4.50 | 2.021 | .625 | 3.50 | 835 |
| LC2812ATZ | 43.88 | 32.19 | 16.50 | 22.00 | 5.00 | 4.75 | 2.375 | 4.50 | 2.021 | .625 | 3.50 | 900 |

(1) 'D' DIMENSION WILL NOT BE EXCEEDED. SHIMS UP TO .03 INCHES IN THICKNESS ARE USUALLY REQUIRED FOR COUPLED OR GEARED MACHINES.
(2) 'U' VARIES----+.000 -.001
(3) 'R' VARIES----+.000 -.015
(4) TERMINAL BOX VARIES WITH H.P. FOR DIMENSIONS 'AA', 'AB', 'AC', 'AF', 'X' AND 'Y', SEE DRAWING NUMBER 609959-1.
(5) WALLS OR OBSTRUCTIONS MUST NOT ENCROACH ON AIR INLET SPACE 'XC'.
(6) 'FAK' VARIES +.005 -.000----FACE RUNOUT AND ECCENTRICITY .007 MAX. T.I.R.
(7) 'FZK' VARIES +.000 -.005----FACE RUNOUT AND ECCENTRICITY .007 MAX. T.I.R.
(8) STUB SHAFT SUPPLIED ONLY WHEN SPECIFIED. KEY SIZE .188 X .188 X 1.00
(9) FOR RE-045 OR SPY PROVISIONS ON 'C2812' ADD 1.00 TO 'LL' DIMENSION. TERMINAL BOX CAN BE ROTATED FOR LEAD OUTLET AT TOP, SIDES OR BOTTOM. TERMINAL BOX LOCATED ON OPPOSITE SIDE WHEN F-2, W-1, W-4, W-5, W-7, OR C-1 MOUNTING IS SPECIFIED. BOX LOCATED ON TOP WHEN SPECIFIED. MOTOR WEIGHT MAY VARY 15% FOR NON-STANDARD RATINGS AND/OR ACCESSORIES. IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.

| TACHOMETER | LL |
|---|---|
| BC-42 | 4.25 |
| BC-46 | |
| RD-11 | |
| RD-12 | |
| RD-51 | |
| RD-61 | |
| RD-62 | |
| RE-210 | |
| M627, M628 | |
| M727, M737 | |
| M738 | |
| DYNAPAR 74S | |
| RE-045 | 3.80 |
| SPY | 1.12 |
| | SEE NOTE (9) |

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

| | | |
|---|---|---|
| REV. DESC: LOADED TO BUS | | |
| REV. LTR: – | VERSION: 00 | TDR: 000000577407 |
| FILE: \RGG\00015\557 | REVISED: 11:02:01 01/26/2011 | BY: CONNAS |
| MTL: – | | |

BALDOR

DIMENSION DRAWING,SC2113ATZ – LC2812ATZ,TEFC,FOOT MTG
SH 1 of 1

609951-013

609959-001

# INDUSTRIAL DIRECT CURRENT MOTORS AND GENERATORS – RPM III

## STANDARD SIZE AND ONE SIZE LARGER

### TERMINAL BOX DIMENSIONS

### FRAMES C2113ATZ THRU C2815ATZ




DIMENSIONS ARE IN INCHES

STEEL TERMINAL BOX DIMENSIONS

| FRAME SIZE | MAX. AMPS | AA(1) | STANDARD SIZE AB | AC | AF | X | Y | PART NUMBER | ONE SIZE LARGER AA(1) | AB | AC | AF | X | Y | PART NUMBER |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C2113ATZ C2115ATZ (2) | 40 | 3/4 & 1" | 8.97 | 7.47 | 1.94 | 4.38 | 5.00 | 705028-1-R | 1-1/4 & 1-1/2 | 10.03 | 8.03 | 2.50 | 5.50 | 6.12 | 705029-1-R |
| | 96 | 1-1/4 & 1-1/2 | 10.03 | 8.03 | 2.50 | 5.50 | 6.12 | 705029-1-R | 2" & 2-1/2 | 11.16 | 8.41 | 3.19 | 7.00 | 7.62 | 705030-1-R |
| | 208 | 2" & 2-1/2 | 11.16 | 8.41 | 3.19 | 7.00 | 7.62 | 705030-1-R | 2" & 2-1/2 | 11.16 | 8.41 | 3.19 | 7.00 | 7.62 | 705030-1-R |
| C2512ATZ C2514ATZ C2515ATZ (2) | 40 | 3/4 & 1" | 10.03 | 8.53 | 1.94 | 4.38 | 5.00 | 705028-1-R | 1-1/4 & 1-1/2 | 11.09 | 9.09 | 2.50 | 5.50 | 6.12 | 705029-1-R |
| | 96 | 1-1/4 & 1-1/2 | 11.09 | 9.09 | 2.50 | 5.50 | 6.12 | 705029-1-R | 2" & 2-1/2 | 12.22 | 9.47 | 3.19 | 7.00 | 7.62 | 705030-1-R |
| | 208 | 2" & 2-1/2 | 12.22 | 9.47 | 3.19 | 7.00 | 7.62 | 705030-1-R | 2" & 2-1/2 | 12.22 | 9.47 | 3.19 | 7.00 | 7.62 | 705030-1-R |
| C2812ATZ C2813ATZ C2815ATZ | 128 | 2" | 14.03 | 10.53 | 4.25 | 8.44 | 7.25 | 74874-R | 3" | 14.47 | 11.22 | 4.25 | 8.44 | 7.25 | 74874-24-R |
| | 185 | 3" | 14.47 | 11.22 | 4.25 | 8.44 | 7.25 | 74874-24-R | 4" | 15.91 | 11.84 | 5.38 | 10.56 | 9.00 | 700308-3-R |
| | 269 | 4" | 15.91 | 11.84 | 5.38 | 10.56 | 9.00 | 700308-3-R | 5" (4) | 18.72 | 13.47 | 7.00 | 12.75 | 15.00 | 702658-1-C |

CAST IRON TERMINAL BOX DIMENSIONS

| FRAME SIZE | MAX. AMPS | AA(3) | STANDARD SIZE AB | AC | AF | X | Y | PART NUMBER | ONE SIZE LARGER AA(3) | AB | AC | AF | X | Y | PART NUMBER |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C2113ATZ C2115ATZ | 18 | 3/4 | 10.03 | 8.03 | 2.50 | 5.00 | 5.75 | 705028-2-S | 1" | 10.03 | 8.03 | 2.50 | 5.00 | 5.75 | 705028-2-T |
| | 40 | 1" | 10.03 | 8.03 | 2.50 | 5.00 | 5.75 | 705028-2-T | 1-1/2 | 10.97 | 8.53 | 3.00 | 6.00 | 7.00 | 705029-2-R |
| | 96 | 1-1/2 | 10.97 | 8.53 | 3.00 | 6.00 | 7.00 | 705029-2-R | 2" | 10.97 | 8.53 | 3.00 | 6.00 | 7.00 | 705029-2-S |
| | 208 | 2" | 10.97 | 8.53 | 3.00 | 6.00 | 7.00 | 705029-2-S | 2-1/2 | 12.66 | 8.91 | 3.62 | 7.88 | 9.25 | 705030-2-R |
| C2512ATZ C2514ATZ C2515ATZ | 18 | 1" | 11.09 | 9.09 | 2.50 | 5.00 | 5.75 | 705028-2-S | 1" | 11.09 | 9.09 | 2.50 | 5.00 | 5.75 | 705028-2-T |
| | 40 | 1" | 11.09 | 9.09 | 2.50 | 5.00 | 5.75 | 705028-2-T | 1-1/2 | 12.03 | 9.59 | 3.00 | 6.00 | 7.00 | 705029-2-R |
| | 96 | 1-1/2 | 12.03 | 9.59 | 3.00 | 6.00 | 7.00 | 705029-2-R | 2" | 12.03 | 9.59 | 3.00 | 6.00 | 7.00 | 705029-2-S |
| | 208 | 2" | 12.03 | 9.59 | 3.00 | 6.00 | 7.00 | 705029-2-S | 2-1/2 | 13.72 | 9.97 | 3.62 | 7.88 | 9.25 | 705030-2-R |
| C2812ATZ C2813ATZ C2815ATZ | 128 | 2" | 12.78 | 10.34 | 3.00 | 6.00 | 7.00 | 75460-T | 3" | 14.47 | 10.72 | 3.62 | 7.88 | 9.25 | 76700-RB |
| | 185 | 3" | 14.47 | 10.72 | 3.62 | 7.88 | 9.25 | 76700-RB | 4" | 15.78 | 11.59 | 4.12 | 9.50 | 10.50 | 76708-RR |
| | 269 | 4" | 15.78 | 11.59 | 4.12 | 9.50 | 10.50 | 76708-RR | 5" (4) | 18.59 | 13.34 | 7.00 | 12.75 | 15.00 | 76870-S |

CONDUIT BOX DIMENSIONS WITH TERMINAL BOARDS (IEC TYPE BOX)

STANDARD SIZE

| FRAME SIZE | AMPS | AB | AC | AF | X | AA | Y | PART NUMBER | PART NUMBER |
|---|---|---|---|---|---|---|---|---|---|
| C210 | 100 | 10.71 | 8.98 | 2.72 | 7.48 | -- | 7.48 | 706310-56-A | 706310-225-R |
| | 200 | 11.26 | 9.25 | 3.35 | 8.82 | -- | 8.82 | 706310-56-B | 706310-226-R |
| C250 | 100 | 11.30 | 9.57 | 2.72 | 7.48 | -- | 7.48 | 706310-56-A | 706310-225-R |
| | 200 | 11.85 | 9.84 | 3.35 | 8.82 | -- | 8.82 | 706310-56-B | 706310-226-R |
| | 400 | 17.48 | 12.75 | 6.20 | 14.39 | -- | 14.39 | 706310-63-B & 706310-63G | 706310-63-B & 706310-63G |
| | 800 | 17.48 | 12.75 | 6.20 | 14.39 | -- | 14.39 | 706310-63-B & 706310-63G | 706310-63-B & 706310-63G |
| C280 | 200 | 12.60 | 10.59 | 3.76 | 8.82 | -- | 8.82 | 706310-56-B | 706310-226-R |
| | 400 | 18.27 | 13.54 | 6.20 | 14.39 | == | 14.39 | 706310-63-B & 706310-63G | 706310-63-B & 706310-63G |
| | 800 | 18.27 | 13.54 | 6.20 | 14.39 | -- | 14.39 | 706310-63-B & 706310-63G | 706310-63-B & 706310-63G |
| | 1600 | 18.27 | 13.54 | 7.68 | 15.35 | -- | 15.35 | 706310-63-C | 706310-63-C |

OPTIONAL AUXILIARY CONDUIT BOX DIMENSIONS (MAXIMUM)

| FRAME SIZE | XAB | XX | XY | PART NUMBER |
|---|---|---|---|---|
| C210 | 7.38 | 4.25 | 4.25 | 602007-26-A |
| C250 | 8.44 | 4.25 | 4.25 | 602007-26-A |
| C280 | 9.12 | 4.25 | 4.25 | 602007-26-A |

| FRAME SIZE | XAB | XX | XY | PART NUMBER |
|---|---|---|---|---|
| C210 | 10.88 | 8.00 | 8.00 | 706310-3-B |
| C250 | 11.88 | 8.00 | 8.00 | 706310-3-B |
| C280 | 12.62 | 8.00 | 8.00 | 706310-3-B |

(1) "AA" CONDUIT.
(2) STEEL TERMINAL BOX FOR C2113ATZ AND C2512ATZ FRAMES PROVIDED WITH DOUBLE KNOCKOUT.
(3) "AA" PIPE TAP.
(4) TERMINAL BOX 76870-S AND 76870-SR EXTENDS BELOW MOTOR FEET. TERMINAL BOX CAN BE ROTATED FOR LEAD OUTLET AT TOP, SIDES OR BOTTOM. TERMINAL BOX LOCATED ON OPPOSITE SIDE WHEN F-2, W-1, W-4, W-5, W-7, OR C-1 MOUNTING IS SPECIFIED. BOX LOCATED ON TOP WHEN SPECIFIED. FOR "X/P" TERMINAL BOX DIMENSIONS SEE 609959-2. FOR MILL TYPE TERMINAL BOX DIMENSIONS SEE 609959-3.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

| | | |
|---|---|---|
| REV. DESC: ADD 706310-63G C/BOX TO C250 AND C280 FRAMES | | |
| REV. LTR: A | VERSION: 01 | TDR: 000000816512 |
| FILE: \RGG\00021\153 | | REVISED: 03:09:09 09/06/2013 |
| MTL: – | | BY: RGGWT |

BALDOR

DIMENSION SHEET

SH 1 of 1

609959-001

406770-001

# CONNECTION DIAGRAM
## D-C MOTOR - STAB. SHUNT




406770-001

ARMATURE AND FIELD EXTERNAL CONNECTIONS
WARNING- SEE NOTE 8 FOR GROUNDING INSTRUCTIONS




ROTATION FACING COMMUTATOR END

1. CAUTION — ARMATURE AND SERIES FIELD MAY HAVE MULTIPLE LEADS. CONNECT ALL LUGS WITH THE SAME MARKING TOGETHER.
2. OPTIONAL SERIES FIELD IS MARKED S3 AND S4. FOR CUMULATIVE SERIES FIELD, CONNECT S3 TO S2 AND CONNECT S4 TO NEGATIVE. FOR DIFFERENTIAL SERIES FIELD CONNECT S4 TO S2 AND S3 TO NEGATIVE.
3. OPTIONAL CONTROL SIGNAL LEAD IS MARKED AX2. ALWAYS TAKE INTERPOLE DROP BETWEEN A2 AND AX2. NOTE: NEMA DESIGNATION FOR AX2 IS LETTER C.
4. SPACE HEATERS, WHEN PROVIDED, WILL HAVE LEADS MARKED H1 AND H2, H3, H4, ETC.
5. THERMAL PROTECTOR, WHEN PROVIDED, WILL HAVE LEADS MARKED P1 AND P2, P3, P4, ETC.
6. WINDING RTD'S, WHEN PROVIDED, WILL HAVE LEADS MARKED TD1, TD2, &TD3
7. BRUSH WEAR SENSOR, WHEN PROVIDED, WILL HAVE LEAD MARKED W1.
8. WARNING — MOTOR MUST BE GROUNDED TO PREVENT SERIOUS INJURIES TO PERSONNEL. GROUND THE MOTOR PER IEC, NATIONAL ELECTRICAL CODE AND ANY APPLICABLE LOCAL ELECTRICAL CODES. A TAPPED HOLE IS PROVIDED IN THE CONDUIT BOX, ON THE FOOT. FRAME BRACE OR OPPOSITE DRIVE END BRACKET, ADJACENT TO THE TERMINAL BOX FOR MOTOR GROUNDING. GROUND LEAD, WHEN PROVIDED, WILL BE GREEN.

CUSTOMER _____ CUSTOMER
ORDER NO. _____ RELIANCE
S.O. NO. _____

| | | |
|---|---|---|
| REV. DESC: DELETED DUPLICATE WORDS FROM NOTE 8 | | |
| REV. LTR: A | VERSION: 01 | TDR: 000000970330 |
| FILE: \RSN\00026\422 | REVISED: 10:19:12 03/11/2016 | BY: RAGTBM |
| MTL: - | | |

BALDOR

D-C MOTOR CONNECTION DIAGRAM STAB. SHUNT

SH 1 of 1