
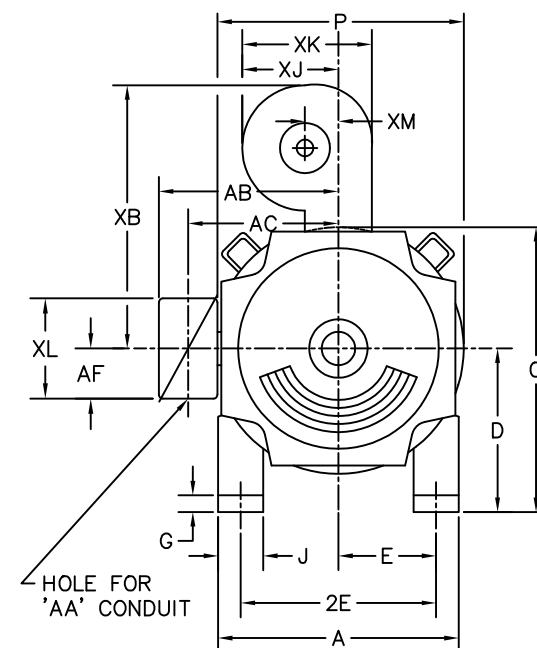
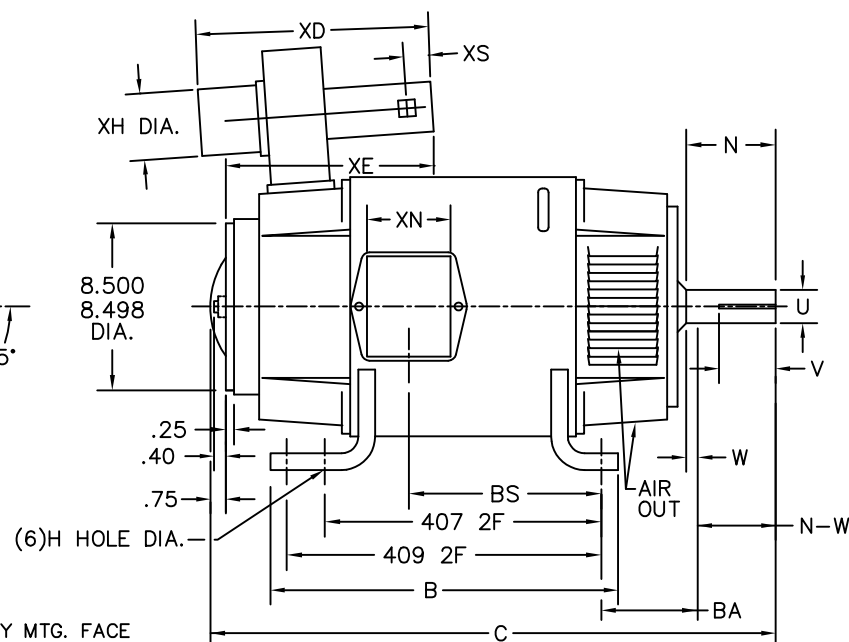
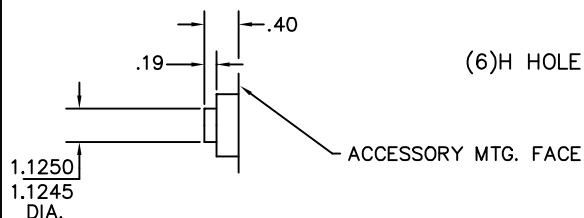


1/2-13UNC-2B THD X 1.00 DP.
4-HOLES ON A 7.250 DIA. B.C.

1/2-13UNC-2B THD
X 1.00 DP. IN SHAFT
END.



	FOOT MOUNTING							D.E. SHAFT EXTENSION					DRIVE KEY		FRAME					
FRAME	BA	E	407 2F	409 2F	G	H	J	N	N-W	U	V	W	KEY-SQ.	KEY-LONG	A	B	C	D	O	P
407-9AT	6.63	8.00	18.00	22.00	.81	.938	4.00	5.44	5.25	2.625 ¹	5.00 ⁴	.19	.625	4.00	20.00	24.00	40.13	10.00 ³	20.19	20.38

	CONDUIT BOX							BLOWER									APPROXIMATE WEIGHT
FRAME	AA	AB	AC	AF	BS	XL	XN	SIZE	XB	XD	XE	XH	XM	XJ	XK	XS	
407-9AT	3	18.28	14.45	3.34	14.50	11.63	7.76	6	19.63	26.38	19.13	10.25	4.19	9.44	11.50	3.75	1355

- 1) SHAFT DIAMETERS ABOVE 1.500 TOLERANCE +.0000 -.0010
- 2) SHAFT DIAMETERS ABOVE 1.625 RUNOUT .003 T.I.R. MAX.
- 3) 'D' DIMENSION TOLERANCE +.000 - .060
- 4) 'V' DIMENSION IS MAX. HUB LENGTH ON SHAFT
- 5) CONDUIT BOX CAN BE ROTATED IN 90° STEPS ON ITS OWN AXIS.
- 6) ALL DIMENSIONS NOT NOTED ARE NOMINAL DIMENSIONS CONSULT FACTORY FOR TOLERANCES.

FOR F1 OR F2 CONDUIT BOX
LOCATION SEE SALES ORDER

MATL: -

REV: - NEW LOAD

2340

SCALE: -

BY: RRL

REVISED: 01/27/98

FILE: CHB00005828

TDR: 0127363

BALDOR ELECTRIC Co.

DIM SHEET,407-9AT,DPBV,WITH 407 AND 409 MOUNTING