

ABB BALDOR RELIANCE III

Customer information packet

ECP3660T-4

3HP, 3500RPM, 3PH, 60HZ, 182T, 0628M, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	182T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	3.400 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	88.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part Detail

Revision	AB
Type	AC
Mech. spec.	06H483
Base	
Status	PRD/A
Elec. spec.	06WGW109
Layout	06LYH483
Eff. date	04-12-2024
CD Diagram	CD0006
Poles	02
Leads	3#16
Proprietary	False
Created date	08-07-2006

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	3.4 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	L
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Max Speed	5400 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0628M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	15.93 IN
Power Factor	92
Product Family	Chemical Processing (Not DC)
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3257									
CAT.NO.	ECP3660T-4								
SPEC.	06H483W109G1								
HP	3 TE								
VOLTS	460								
AMP	3.4								
RPM	3500								
FRAME	182T		HZ	60		PH	3		
SER.F.	1.15	CODE	L	DES	B	CL	F		
RATING	40C AMB-CONT								
SN									
DE	6206		ODE	6206					
NEMA-NOM-EFF	88.5	PF	92						
G.MIN.EFF	88.5	CC	010A						
T. CODE	T3C	T=	160						

NP3260			
SPEC.	06H483W109G1		
D.E. BRG.	30BC02XP30X		
O.D.E. BRG.	30BC02XP30X		
GREASE	POLYREX EM		
RPM MAX	5400	MAX. KVAR	N/A
BLANK			
INV.TYPE	PWM		
T=	160		
C HP FR	60	C HP TO	90
CT HZ FROM	6	CT HZ TO	60
VT HZ FROM	3	VT HZ TO	60
HTR-VOLTS		HTR-AMPS	
HTR-WATTS		MAX. SPACE HEATER TEMP.	

AC Induction Motor Performance Data

Record # 47068

Typical performance - not guaranteed values

Winding: 06GW109-R033			Type: 0628M	Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: Single Voltage Motor		
Rated Output (HP)		3	Full Load Torque		4.5 LB-FT
Volts		460	Start Configuration		direct on line
Full Load Amps		3.4	Breakdown Torque		23.3 LB-FT
R.P.M.		3500	Pull-up Torque		15.2 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	16 LB-FT
NEMA Design Code	B	KVA Code	L	Starting Current	34.5 A
Service Factor (S.F.)		1.15	No-load Current		1.06 A
NEMA Nom. Eff.	88.5	Power Factor	92	Line-line Res. @ 25°C	3.92 Ω
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		32°C
S.F. Amps			Temp. Rise @ S.F. Load		38°C
			Locked-rotor Power Factor		44.2
			Rotor inertia		0.126 lb-ft²

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	65	83	89	92	94	95	93
Efficiency	80.9	87.5	89.1	89.3	88.9	88.2	89.1
Speed	3577	3556	3534	3509	3487	3467	3500
Line amperes	1.39	1.96	2.66	3.4	4.12	4.79	3.83


ABB Motors and Mechanical Inc.

WINDING # 06WGW109

Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 3500 RPM 460 V 0628M

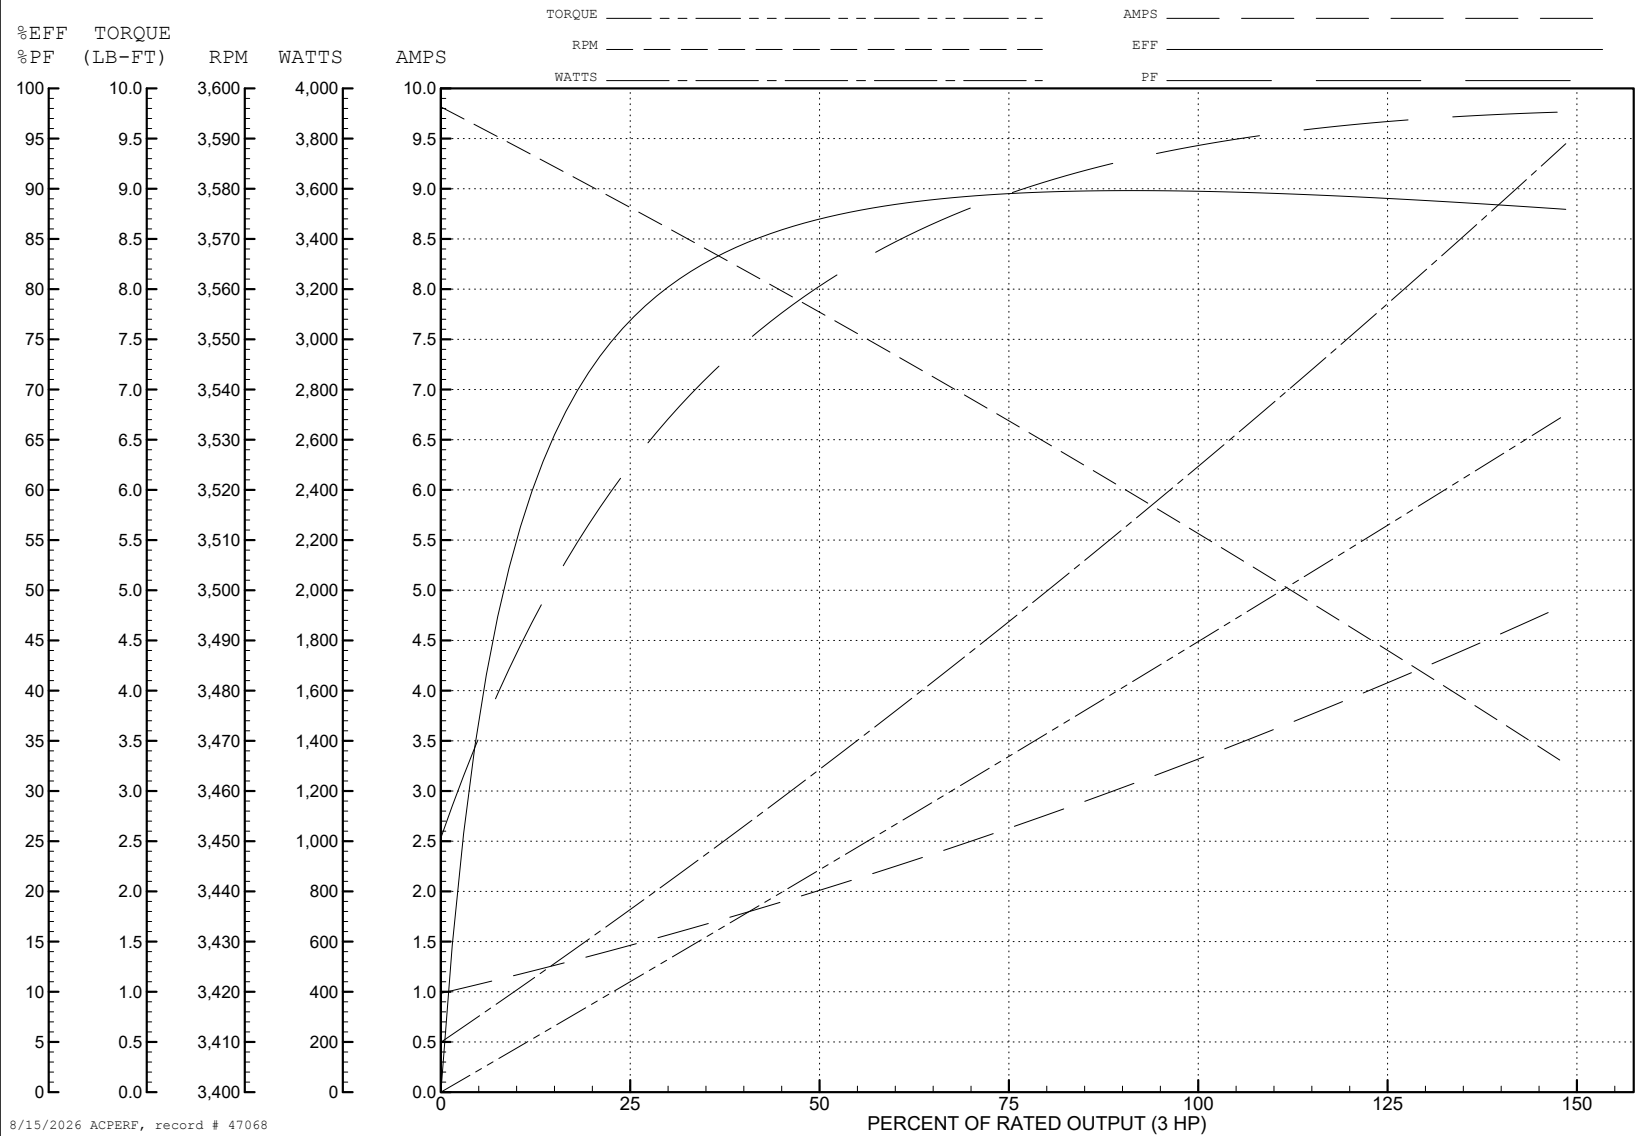TORQUES (LB-FT): PO=23.3 PU=15.2 LR=16 LRA=34.5



AC Induction Motor Performance Data

Record # 110098

Typical performance - not guaranteed values

Winding: 06WGW109-R033			Type: 0628M		Enclosure: TEFC	
Nameplate Data			368 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		3	Full Load Torque		4.59 LB-FT	
Volts		460	Start Configuration		direct on line	
Full Load Amps		3.4	Breakdown Torque		14.8 LB-FT	
R.P.M.		3500	Pull-up Torque		9.6 LB-FT	
Hz	60	Phase	Locked-rotor Torque		10.1 LB-FT	
NEMA Design Code	B	KVA Code	Starting Current		27.5 A	
Service Factor (S.F.)		1.15	No-load Current		0.85 A	
NEMA Nom. Eff.	88.5	Power Factor	Line-line Res. @ 25°C		4.1 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		40°C	
S.F. Amps			Temp. Rise @ S.F. Load		53°C	
			Locked-rotor Power Factor		44.2	
			Rotor inertia		0.126 LB-FT2	

Load Characteristics 368 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	75	89	93	94	95	97	95
Efficiency	83.5	88.2	88.3	87.2	85.4	82.9	86.1
Speed	3562	3527	3488	3443	3395	3339	3414
Line amperes	1.43	2.27	3.25	4.29	5.37	6.48	4.94


ABB Motors and Mechanical Inc.

WINDING # 06WGW109

Typical performance - not guaranteed values.




3 HP 3 PH 60 HZ 3500 RPM 368 V 0628M

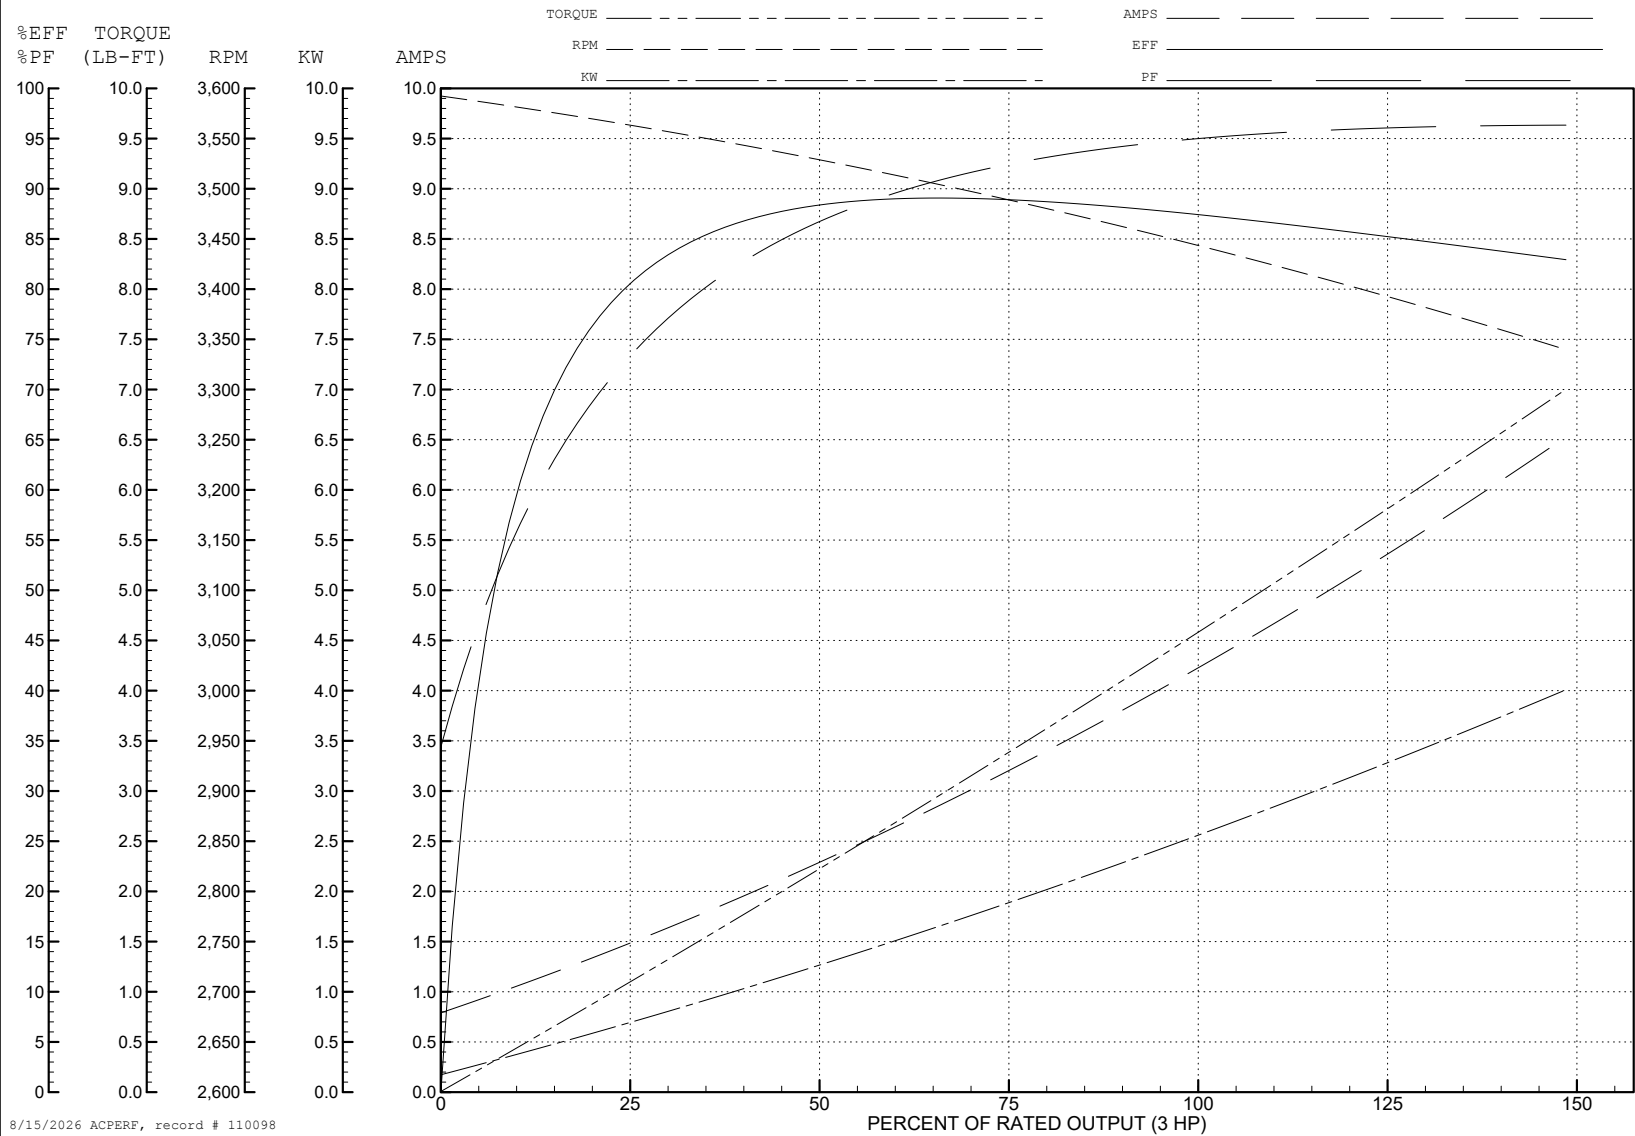TORQUES (LB-FT): PO=14.8 PU=9.6 LR=10.1 LRA=27.5





CD0006

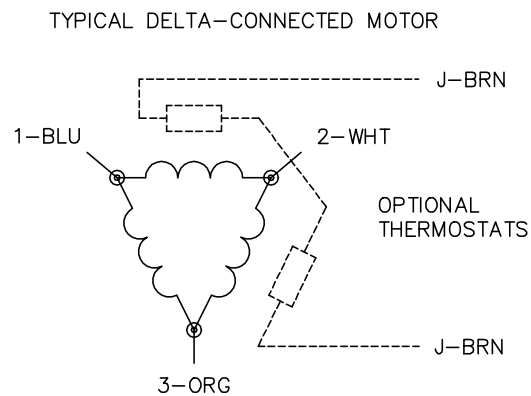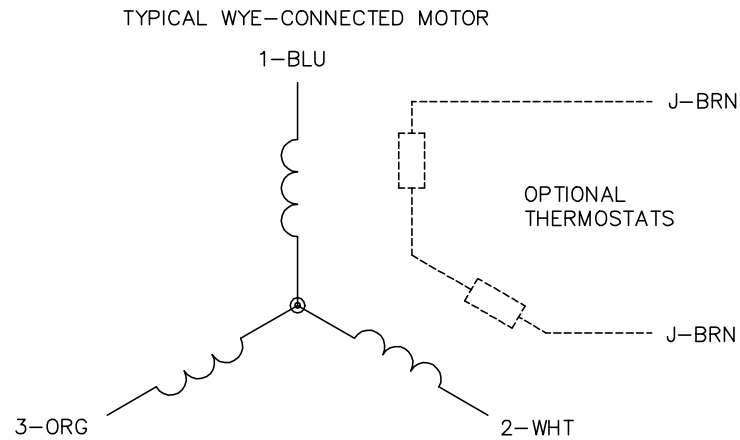
NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: —


BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1