

ABB BALDOR RELIANCE III

Customer information packet

ECP3663T

5HP, 3505RPM, 3PH, 60HZ, 184T, TEFC, FOOT,
Class - CLI GP A,B,C,D
Division - Division II

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	11.400 A @ 230.0 V 5.700 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part Detail

Revision	U
Type	AC
Mech. spec.	06H003
Base	
Status	PRD/A
Elec. spec.	06WGW730
Layout	06LYH003
Eff. date	03-24-2023
CD Diagram	CD0005
Poles	02
Leads	9#16
Proprietary	False
Created date	05-13-2010

Front Face Code	Standard
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	5.7 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	M
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Max Speed	5400 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0632M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	15.93 IN
Power Factor	90
Product Family	Chemical Processing (Not DC)
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3490 rpm
Speed Code	Single Speed
Starting Method	Direct on line

Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3260			
SPEC.	06H003W730G1		
D.E. BRG.	30BC02XP30X		
O.D.E. BRG.	25BC02XP30X		
GREASE	POLYREX EM		
RPM MAX	5400	MAX. KVAR	N/A
BLANK			
INV.TYPE	PWM		
T=	160		
C HP FR	60	C HP TO	90
CT HZ FROM	6	CT HZ TO	60
VT HZ FROM	3	VT HZ TO	60
HTR-VOLTS		HTR-AMPS	
HTR-WATTS		MAX. SPACE HEATER TEMP.	

NP3257

CAT.NO.	ECP3663T									
SPEC.	06H003W730G1									
HP	5 TE									
VOLTS	230/460									
AMP	11.4/5.7									
RPM	3490									
FRAME	184T		HZ	60		PH	3			
SER.F.	1.15	CODE	M	DES	A	CL	F			
RATING	40C AMB-CONT									
SN										
DE	6206		ODE	6205						
NEMA-NOM-EFF	90.2		PF	90						
G.MIN.EFF	88.5	CC	010A							
T. CODE	T3C	T=	160							

AC Induction Motor Performance Data

Record # 47071

Typical performance - not guaranteed values

Winding: 06WGW730-R030			Type: 0632M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)		5		Full Load Torque		7.54 LB-FT
Volts		230/460		Start Configuration		direct on line
Full Load Amps		11.4/5.7		Breakdown Torque		40.1 LB-FT
R.P.M.		3490		Pull-up Torque		30.6 LB-FT
Hz		60 Phase		Locked-rotor Torque		36.9 LB-FT
NEMA Design Code		A KVA Code		Starting Current		64.8 A
Service Factor (S.F.)		1.15		No-load Current		2.08 A
NEMA Nom. Eff.		90.2 Power Factor		Line-line Res. @ 25°C		1.93 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		51°C
S.F. Amps				Temp. Rise @ S.F. Load		62°C

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	55	76	85	90	93	93	92
Efficiency	84.5	89.4	90.8	90.6	90	89	90.2
Speed	3570	3544	3517	3489	3458	3426	3470
Line amperes	2.54	3.47	4.6	5.76	7.03	8.46	6.52


ABB Motors and Mechanical Inc.


WINDING # 06WG730

Typical performance - not guaranteed values.


5 HP 3 PH 60 HZ 3490 RPM 460 V 0632M

TORQUES (LB-FT) : PO=40.1 PU=30.6 LR=36.9 LRA=64.8

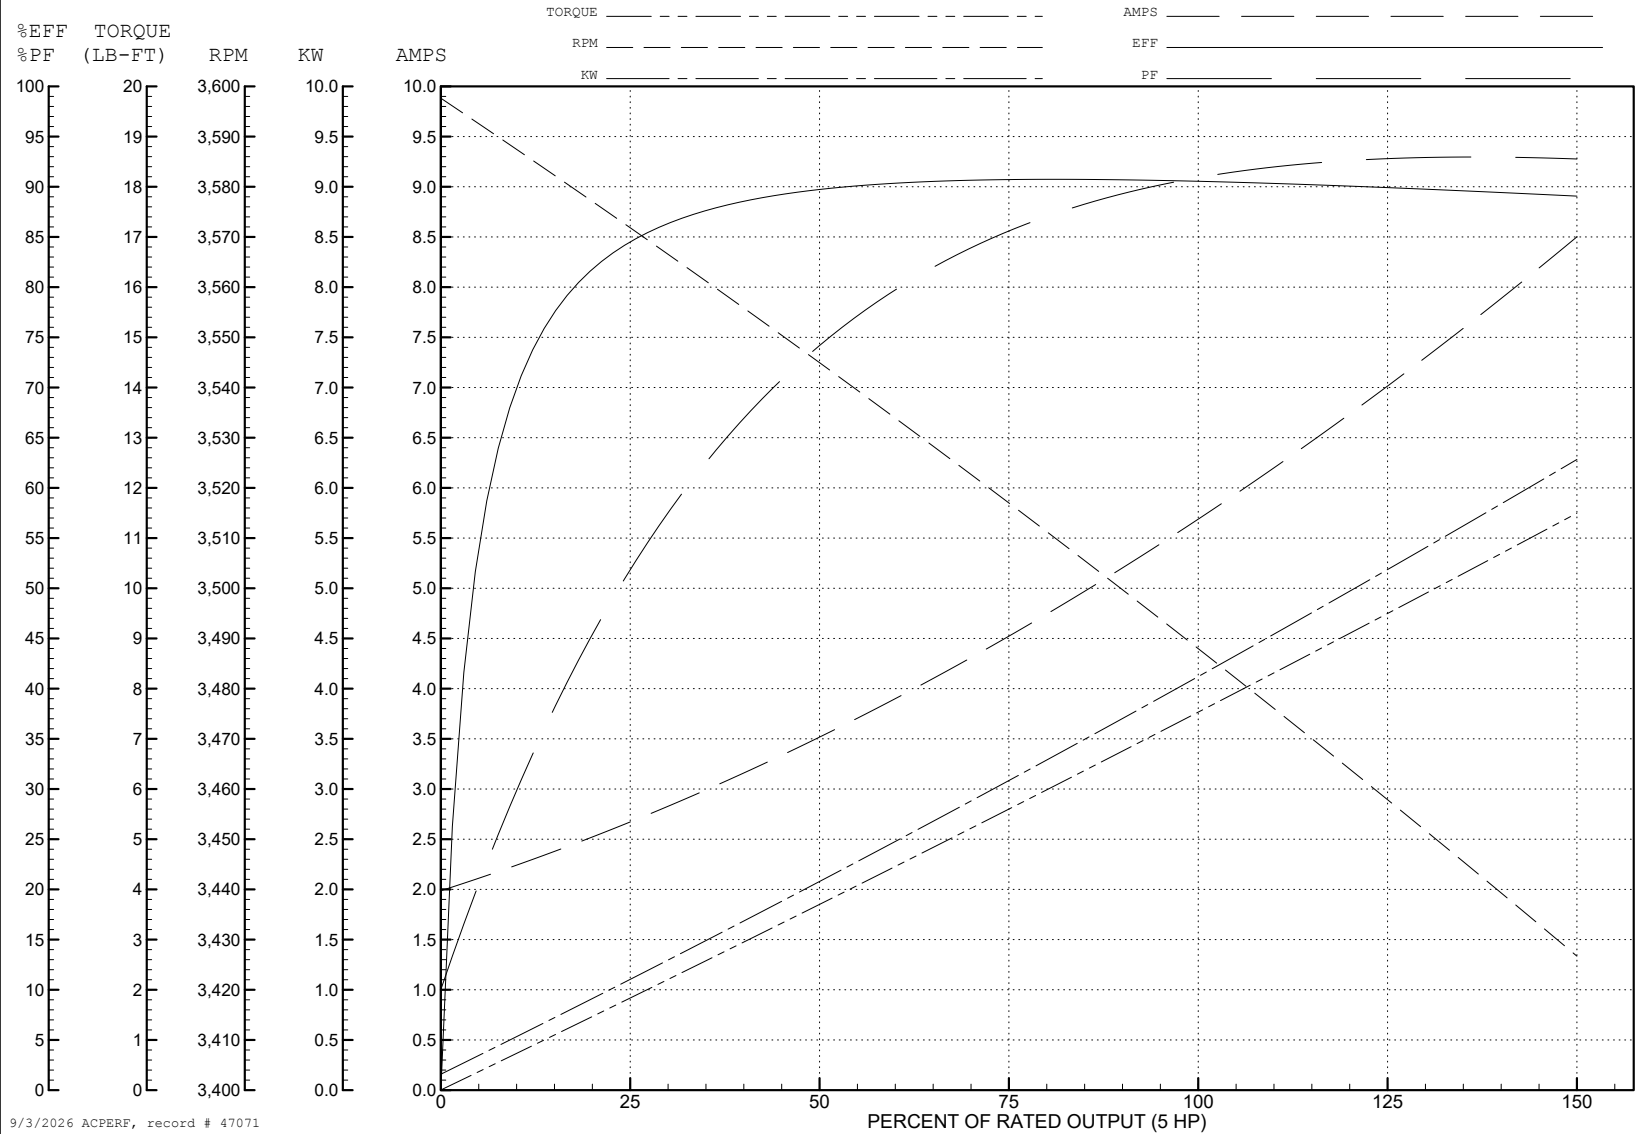

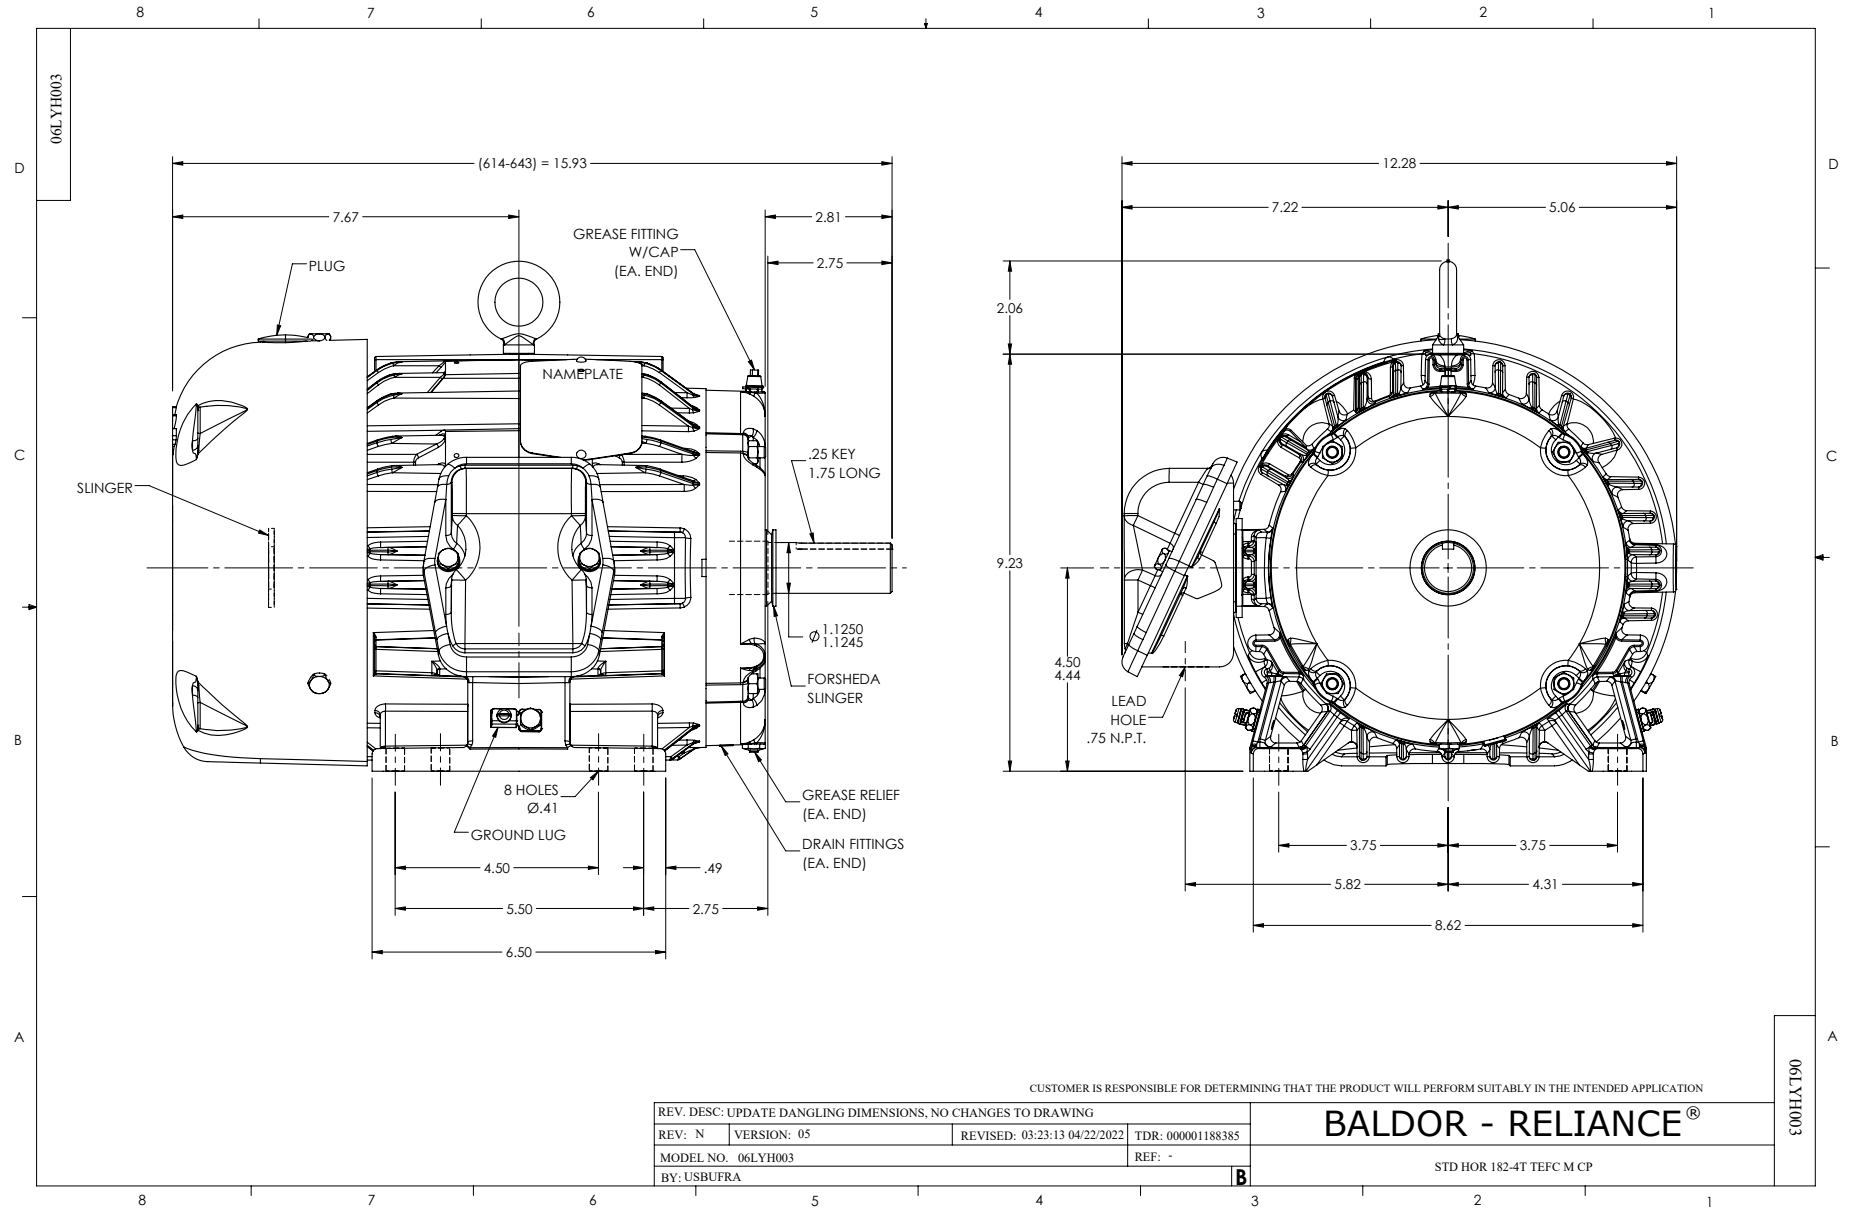

CD00005

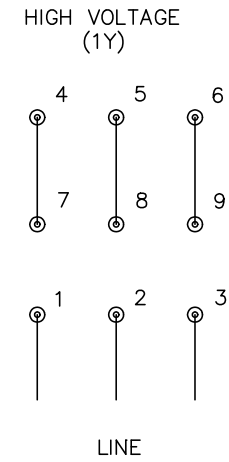

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

3PH, DV, 9 LEADS