

# ABB BALDOR RELIANCE III

---

## Customer information packet

ECS100T2H1DF4

1HP, 1800RPM, 3PH, 60HZ, 145T, 3516B, TEFC, F1

Class - None

Division - Not Applicable

**Specifications**

<b>Enclosure</b>	TEFC
<b>Frame</b>	145T
<b>Frame Material</b>	Steel
<b>Frequency</b>	60.00 Hz
<b>Haz Area Class and Group</b>	None
<b>Haz Area Division</b>	Not Applicable
<b>Motor Letter Type</b>	Brushless Wound Field PM Rotor
<b>Output @ Frequency</b>	1.000 HP @ 60 HZ
<b>Phase</b>	3
<b>Synchronous Speed @ Frequency</b>	1800 RPM @ 60 HZ
<b>Voltage @ Frequency</b>	230.0 V @ 60 HZ
<b>Agency Approvals</b>	BLUETOOTH CULUS WEEE
<b>Ambient Temperature</b>	40 °C
<b>Auxiliary Box</b>	NO AUXILLARY BOX
<b>Auxiliary Box Lead Termination</b>	None
<b>Base Indicator</b>	Rigid
<b>Bearing Grease Type</b>	Polyrex EM (-20F +300F)
<b>Blower</b>	None
<b>Constant Torque Speed Range</b>	6
<b>Current @ Voltage</b>	2.500 A @ 230.0 V
<b>Design Code</b>	-
<b>Drip Cover</b>	No Drip Cover
<b>Duty Rating</b>	CONT
<b>Efficiency @ 100% Load</b>	91.0 %
<b>Electrically Isolated Bearing</b>	Not Electrically Isolated
<b>Feedback Device</b>	NO FEEDBACK
<b>Heater Indicator</b>	No Heater
<b>High Voltage Full Load Amps</b>	2.5 a
<b>Insulation Class</b>	F
<b>Inverter Code</b>	03

**Part Detail**

<b>Revision</b>	D
<b>Type</b>	AC
<b>Mech. spec.</b>	35E5209
<b>Base</b>	
<b>Status</b>	PRD/A
<b>Elec. spec.</b>	35WGG932
<b>Layout</b>	35LYE5209
<b>Eff. date</b>	06-16-2025
<b>CD Diagram</b>	CD0006B03
<b>Poles</b>	04
<b>Leads</b>	3#14 13" LONG LEADS Y
<b>Proprietary</b>	False
<b>Created date</b>	05-06-2024

<b>KVA Code</b>	-
<b>Lifting Lugs</b>	No Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Motor Lead Quantity/Wire Size</b>	3 @ 14 AWG
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	3516B
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	4
<b>Overall Length</b>	12.38 IN
<b>Power Factor</b>	98
<b>Product Family</b>	General Purpose
<b>Pulley Face Code</b>	Standard
<b>Rodent Screen</b>	None
<b>Service Factor</b>	1.00
<b>Shaft Diameter</b>	0.875 IN
<b>Shaft Ground Indicator</b>	Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Speed</b>	1800 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	None
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

Volts	208 - 230	Max RPM	4000	Conn Diag.	CD0006B03	Leads	3
Amps	2.6 - 2.4	Max Amps		Cs Diagram	CS1127	BEMF	135
HP	1	VFD#	ECIN2A4P3			LD	29.3
RPM	1800	S.F.	1.00			LQ	136
Phase/Hz	3/60	Rating	40C AMB-CONT			Rs	4.8923 Meas. L-L

**60034-2-3 Motor Performance at Standardized Operating Points**

	RPM	% Speed	LB-FT	% Torque	HP	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1618	90%	2.9	100%	0.9	89.1	10.92%	82
P2	901	50%	2.9	100%	0.5	84.3	9.24%	70
P3	450	25%	2.9	100%	0.3	78.4	6.85%	52
P4	1621	90%	1.5	50%	0.5	89.0	5.52%	42
P5	900	50%	1.5	50%	0.3	87.1	3.69%	28
P6	900	50%	0.7	25%	0.1	86.1	1.99%	15
P7	450	25%	0.7	25%	0.1	83.2	1.24%	9

**61800-9-2 PDS Performance at Reference Operating Points**


	RPM	% Speed	LB-FT	% Torque	HP	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1804	100%	2.9	100%	1.0	87.4	14.30%	108
P2	901	50%	2.9	100%	0.5	80.3	12.17%	92
P3	300	17%	2.9	100%	0.2	64.8	8.96%	68
P4	1801	100%	1.5	50%	0.5	85.8	8.17%	62
P5	900	50%	1.5	50%	0.3	81.9	5.45%	41
P6	300	17%	1.5	50%	0.1	66.9	4.07%	31
P7	900	50%	0.7	25%	0.1	79.0	3.27%	25
P8	300	17%	0.7	25%	0.0	64.4	2.28%	17

Points not taken in certified order.

<b>BALDOR • RELIANCE</b>	DR By: <u>R &amp; D</u>	<b>AC MOTOR PERFORMANCE CURVES</b>	<b>35WGG932</b> 35-0000-1620 Test - 111668
	CK By: <u>USBIBAK</u>		
	APP By: <u>USWEQUA1</u>		
	Date: <u>12/07/2024</u>		

Volts	208 - 230	Max RPM	4000	Conn Diag.	CD0006B03	Leads	3
Amps	2.6 - 2.4	Max Amps		Cs Diagram	CS1127	BEMF	135
HP	1	VFD #	ECIN2A4P3			LD	29.3
RPM	1800	S.F.	1.00			LQ	136
Phase/Hz	3/60	Rating	40C AMB-CONT			Rs	4.8923 Meas L-L


Constant Duty Operating Range

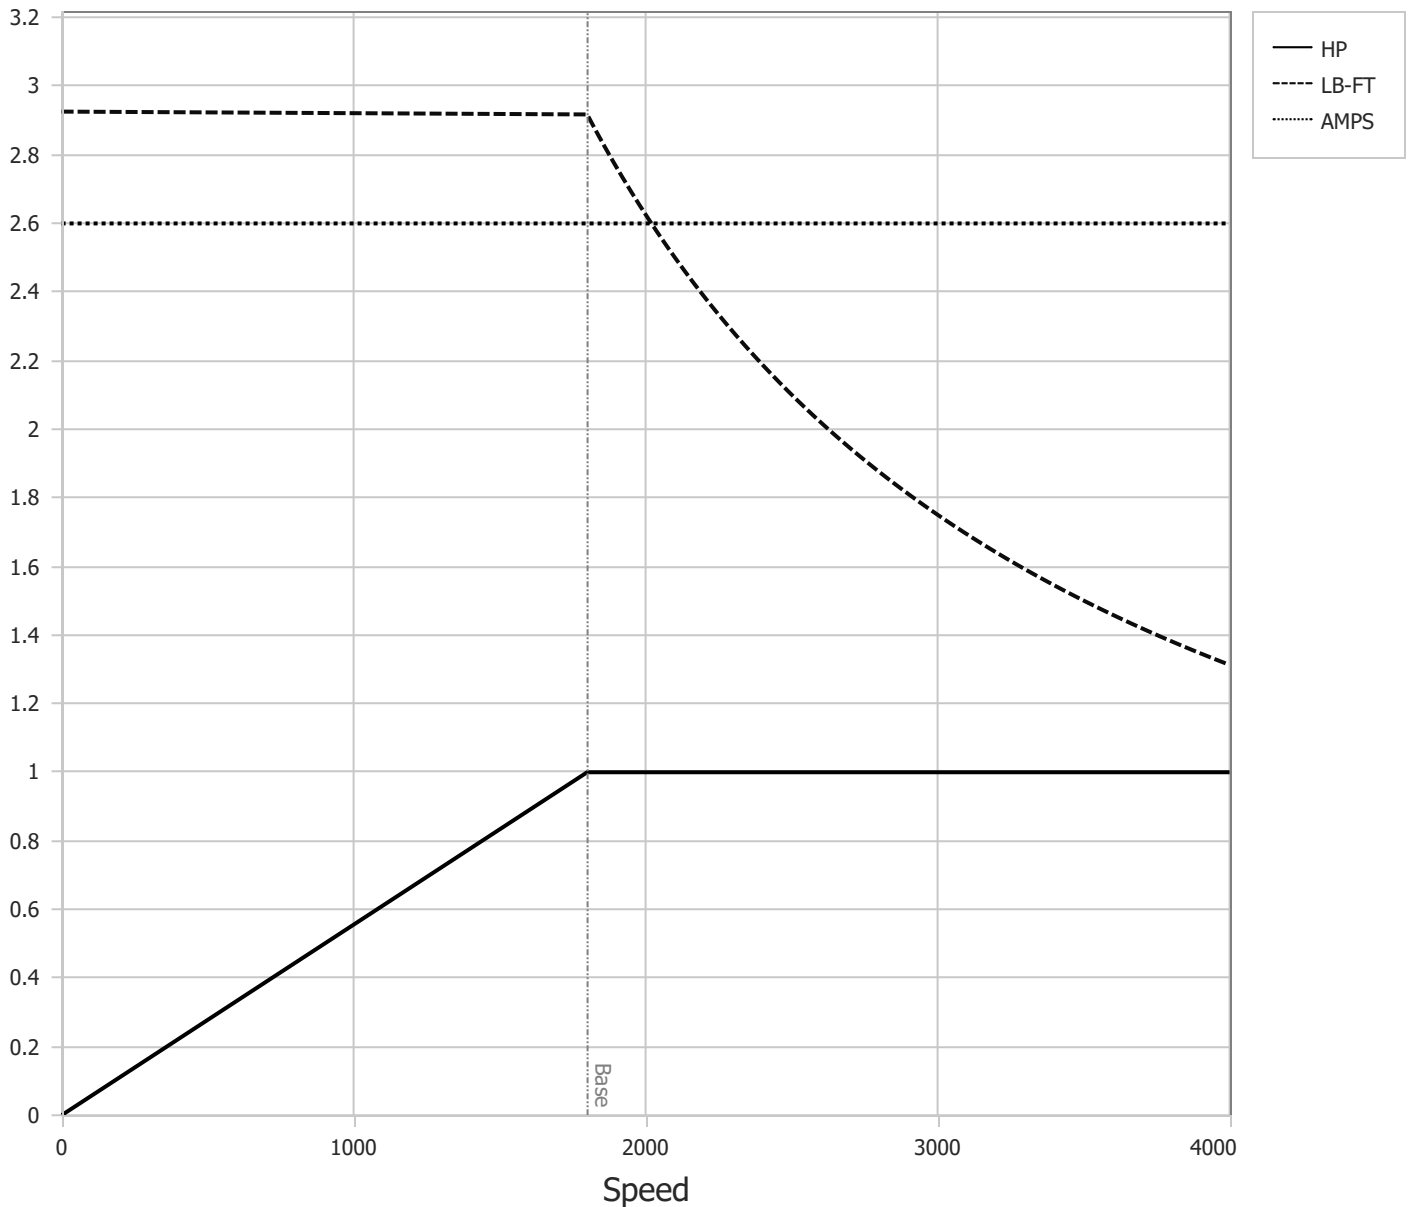

DR By: R & D  
 CK By: USBIBAK  
 APP By: USWEQUA1  
 Date: 12/07/2024

**AC MOTOR  
PERFORMANCE  
CURVES**

**35WGG932**  
 35-0000-1620  
 Test - 111668

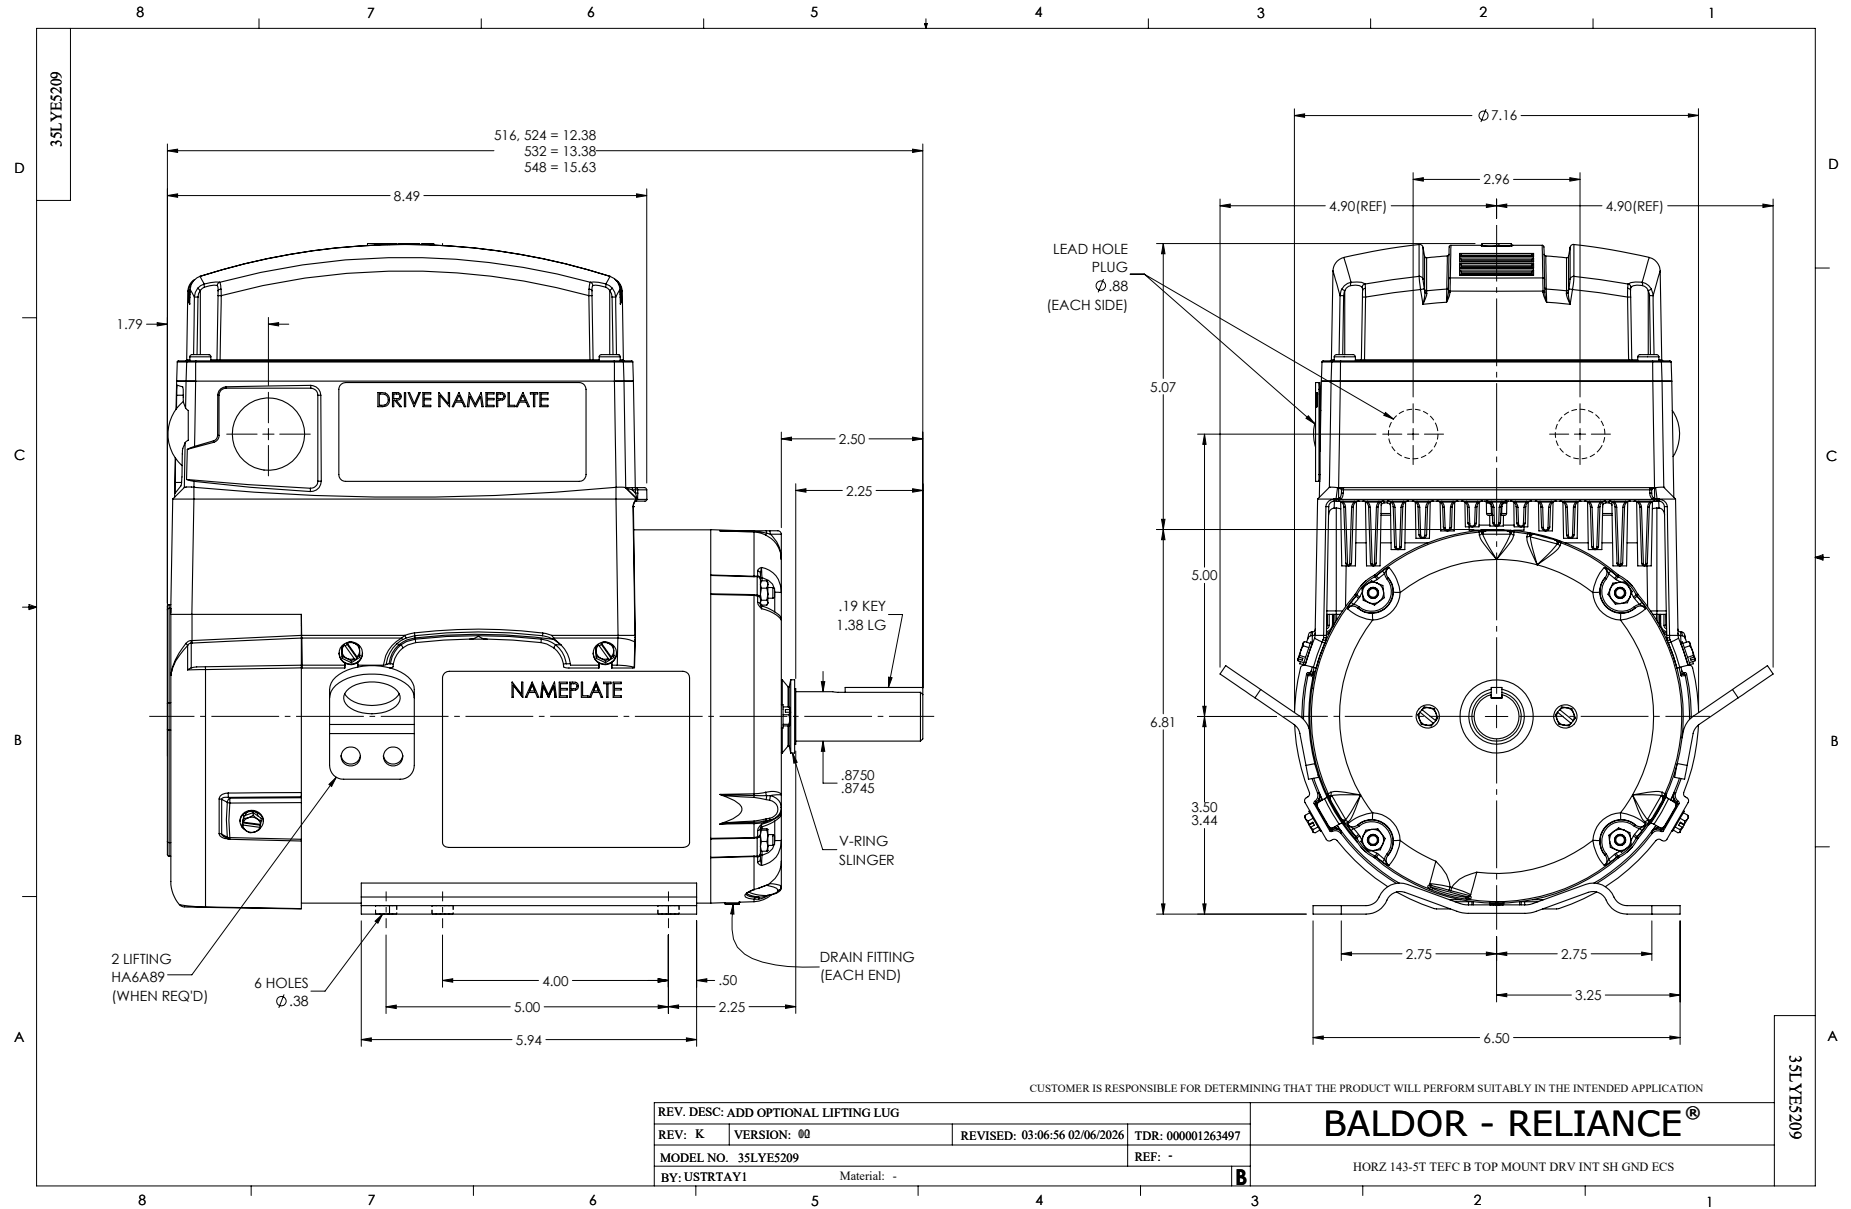


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: ADD OPTIONAL LIFTING LUG			
REV: K	VERSION: 00	REVISED: 03-06-56 02/06/2026	TDR: 000001263497
MODEL NO. 35LYE5209		REF: -	
BY: USTRTAY1		Material: -	

**BALDOR - RELIANCE®**

HORZ 143-5T TEFC B TOP MOUNT DRV INT SH GND ECS

CD0006B03

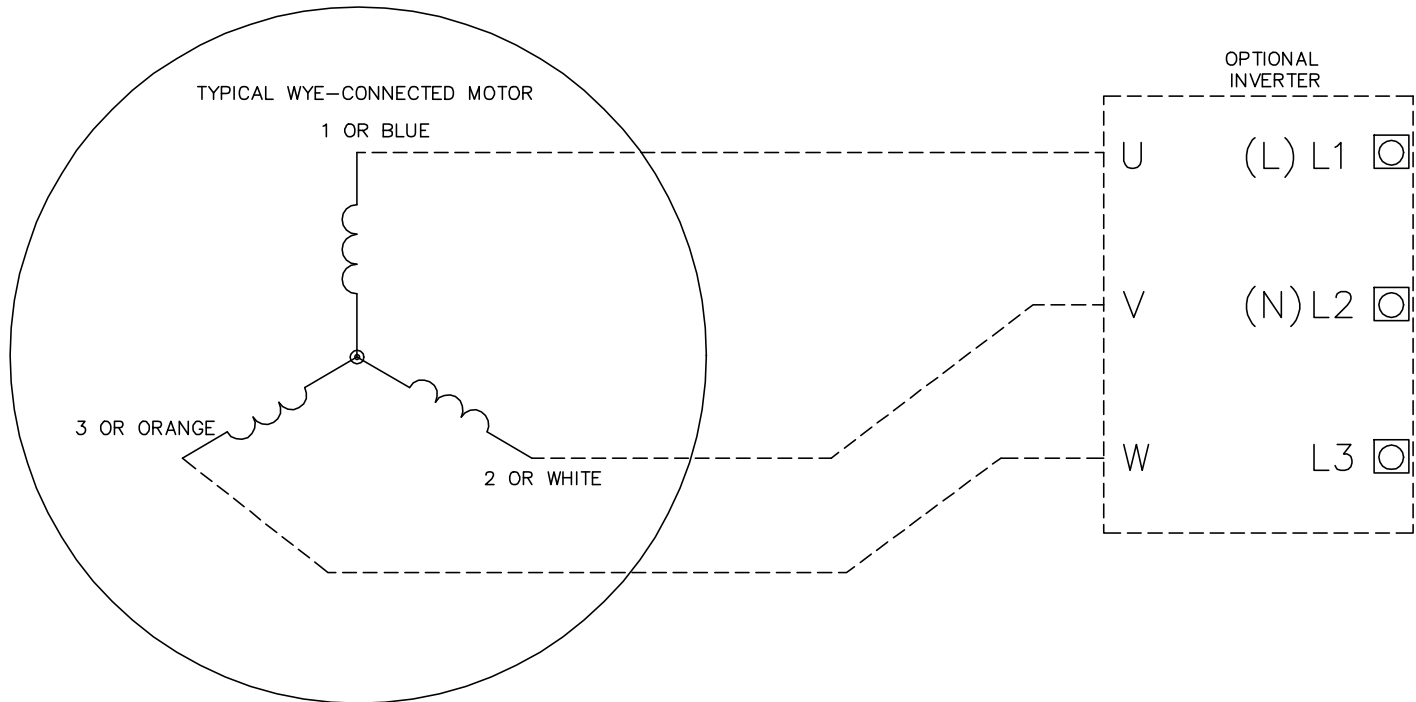

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.

REV. DESC: CHANGE LEAD COLORS TO BLUE WHITE ORANGE		
REV. LTR: A	VERSION: 01	TDR: 000001158598
FILE: \AAA\00252\917	REVISED: 11:01:03 01/19/2021	BY: ENMARSO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE CONNECTED, ECS

SH 1 of 1

CD0006B03